### FURUNO

## **FLEX Function Display**

# Model 5FD-1010/1012





















## **Highly Flexible Displays**

Discover the SFD-1010/1012, 10" and 12" display and control units compatible with a wide range of Furuno sensors from DRS4DL+ Radar to DFF-3D Multibeam Sonar or Fish Finders. These are versatile and highly adaptable Display units that, combined with a hub and your favorite sensors, allow multiple configurations to suit all needs, from recreational boating to workboats.

#### Designed to work with our most popular sensors

SFD-1010/1012 has been designed to work with our most popular sensors such as Radars, Fish Finders and DFF-3D. Each display unit will therefore be able to display the desired mode depending on the configuration.

CS & 3D GAIN 0

855.3ft


**Multibeam Sonar** 

Connect our popular DFF-3D Multibeam Sonar which displays echoes in high-resolution and gives you access to several useful modes such as Cross Section, 3D history, Triple Beam, or Side-Scan.

New DFF-3D/SFD Combo features sea current overlay & virtual net mark


30 30

Thanks to a virtual fishing net, you will be able to determine the position of the net's mouth in relation to the targeted school of fish and thus increase the efficiency of your catch. In addition, you can overlay sea current information as shown in the picture.

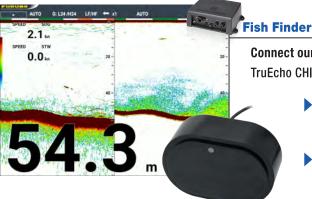

**Connect our most powerful Fish Finders** and enjoy our best fishing technologies such as TruEcho CHIRP™ and ACCU-FISH™ for maximum clarity.

- ► Choose your best Fish Finder Among BBDS1, DFF1, DFF1-UHD, DFF3 depending on your needs.
- ▶ High Resolution Fish Finders provide better bottom contours & clearer presentation that separates bottom structure from bottom fish.

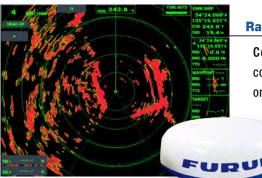

#### Radar

Connect our Plug-and-Play Radar to ensure your safety at sea with the extremely compact Radome 19" DRS4DL+ which features Fast Target Tracking<sup>™</sup> and requires only one LAN cable and one Power Supply cable for its installation.

Multi-station for dual Radar display
The Multi-station feature allows you to connect two SFD displays to one
Radar. We recommend the vertical orientation when using Off-center. it
is perfect for Workboats.



#### Flexible orientation for your favorite display mode

Freely adjust the orientation of your display in a short time and without the need for any tool to do it!



**Touch Control + Control Keys** 

The SFD is also very flexible in its control capabilities, ranging from multi-touch to control keys, as well as operation with an optional mouse.

Adjustable bracket to fit your preferred display orientation.

#### Flexible configuration with the Multi-Station

Connect two SFD-1010/1012 display units with two sensors at the same time or two display units with one sensor through the Hub unit\* to be able to view your desired modes at the same time with only one setup.





#### **Specifications**

#### **Display Unit**

 SFD-1010
 10.4" TFT color LCD, 1024x768 (XGA)

 SFD-1012
 12.1" TFT color LCD, 1024x768 (XGA)

Brillance 800 cd/m<sup>2</sup>
View angle 80°(minimum)

Navigation data Date, Time, Course, Own Ship's position, Bearing, COG/SOG,

Bow direction

Weather Information AWA, AWS, TWA, TWD, TWS, Air pressure, Water depth

Language English, Japanese

**Radar Function** 

Orientation mode Head-up, North-up, Course-up

Trial length 15/30 sec, 1/3/6/15/30 min or continuous

ARPA target 0~30
Fish Finder Function

Color display Depends on the external Fish Finder in use

Display mode Single Frequency, Dual Frequency, Zoom, A-Scope

Expansion mode Bottom-lock expansion, Bottom zoom

Multibeam Sonar Function (When connected to DFF-3D)

Display mode Multibeam Fish Finder, Side-scan, 3D history
Depth range 1200 m max. (4000 ft, 650 fm, 800 HR, 750 pb)

Adjustment Display, Brilliance, Diagnosis

**Interface**Number of ports

-Serial 2 ports, NMEA0183

-LAN 1 port, Ethernet 100Base-TX, RJ45
-USB 1 port, USB2.0 (Type A), For maintenance

-NMEA2000 1 port

**-HDMI output** 1 port, 1280x720 (HD)

**Data sentence** 

-Input GGA, GNS, HDG, HDT, MDA. MWV, RMA, RMB,

RMC, THS, TLL, VHW, VTG, WPT, ZDA

-Output TLL

**Power Supply** 

FLEX Function Display 12-24 VDC: 3.0-1.5 A


**Environmental Conditions** 


Temperature -15°C~+55°C

Humidity 93% Protection IP25

Vibration IEC60945 Ed.4

#### **Drawings**

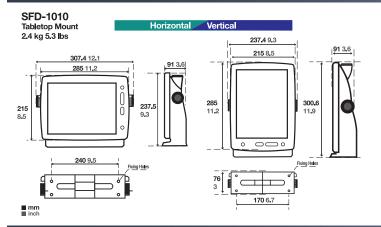


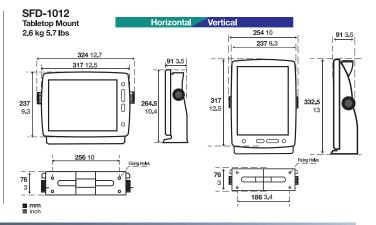

#### Interconnection Diagram



**Stand-Alone Configuration** 

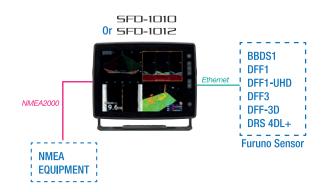

\*Up to 2 sensors can be connected to a SFD unit at a time.

\*\*Optional Hub or local supply

Beware of similar products

All brand and product names are registered trademarks, trademarks or service marks of their respective holders.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

FURUNO ELECTRIC CO., LTD.
Japan | www.furuno.com

FURUNO U.S.A., INC. U.S.A. | www.furunousa.com FURUNO PANAMA S.A.

FURUNO (UK) LIMITED
U.K. | www.furuno.co.uk
FURUNO NORGE A/S

FURUNO DANMARK A/S Denmark | www.furuno.dk FURUNO SVERIGE AB

Sweden | www.furuno.se

FURUNO FINLAND OY

Finland | www.furuno.fi

FURUNO POLSKA Sp. Z o.o.

Poland | www.furuno.pl
FURUNO DEUTSCHLAND GmbH

FURUNO FRANCE S.A.S.
France | www.furuno.fr
FURUNO ESPAÑA S.A.
Spain | www.furuno.es
FURUNO ITALIA S.R.L.
Italy | www.furuno.it
FURUNO HELLAS S.A.
Greece | www.furuno.gr
FURUNO (CYPRUS) LTD

FURUNO SHANGHAI CO., LTD.
China | www.furuno.com/cn
FURUNO CHINA CO., LTD.
Hong Kong | www.furuno.com/cn
FURUNO SINGAPORE
Singapore | www.furuno.sg
PT FURUNO ELECTRIC INDONESIA

FURUNO ELECTRIC (MALAYSIA) SND. BHD. Malaysia | www.furuno.my

Catalogue No. CA000002020

B-2302LB