


PRODEX

PONTOONS & DOCK FENDERS

DÉFENSES ET PROTECTIONS DE QUAIS



PRODEX
Profilé Caoutchouc Élastomère Thermoplastique

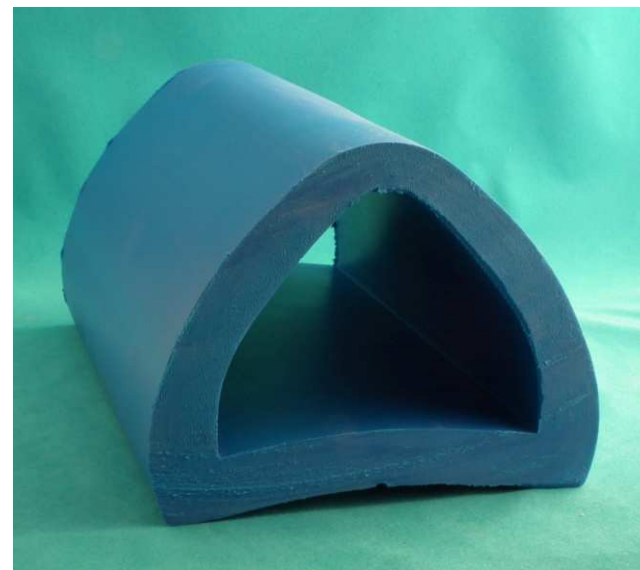



DOCK FENDERS

Presentation


Our fenders extruded in thermoplastic elastomer rubber (**TPE**) offer an excellent resistance to UV, the weathering, the ageing, the abrasion and the marine environment.

Our fenders have **several determining advantages**:


- ***Colorable*** (black, light grey, white, blue or brown, on request...)
- ***Non-marking*** (no stain on the boat hull even in black)
- ***100% recyclable***
- ***Resistance to UV, to cold and ageing***
- ***Possibility to deliver in coil of 50 meters.***
- ***Neat finishing*** (welded corner, closing-up, drilling...)

Our **standard fenders** are **in stock in black or light grey** from 25 meters for the small references and from 10 meters for the big references.

STANDARD FENDERS

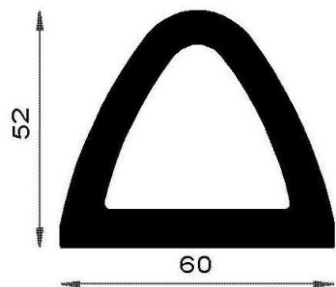


Reference	Dimensions	Minimum order	Colour	Availability
F 1322	60 X 52	25 m	Black	In stock
			Light grey	In stock
			Other one	On production

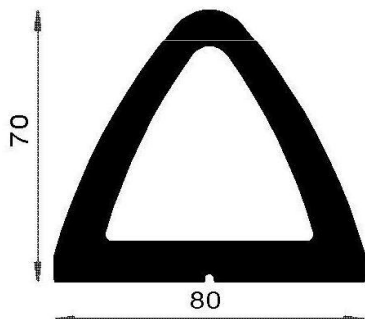


Reference	Dimensions	Minimum order	Colour	Availability
F 1323	80 X 70	25 m	Black	In stock
			Light grey	In stock
			Autre couleur	On production

STANDARD FENDERS

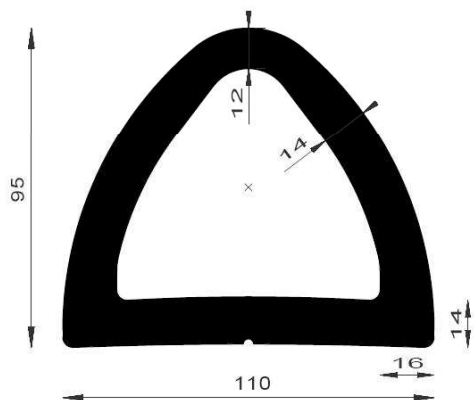


Reference	Dimensions	Minimum order	Colour	Availability
F 3260	110 X 95	10 m	Black	In stock
			Light grey	In stock
			Other	On production

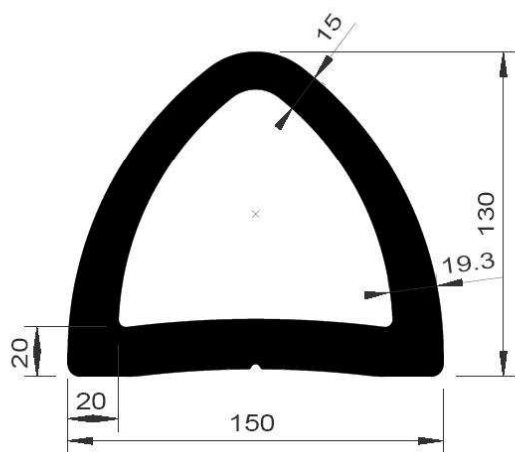

Reference	Dimensions	Minimum order	Colour	Availability
F 3394	150 X 130	10 m	Black	In stock
			Light grey	In stock
			Other	On production

STANDARD FENDERS

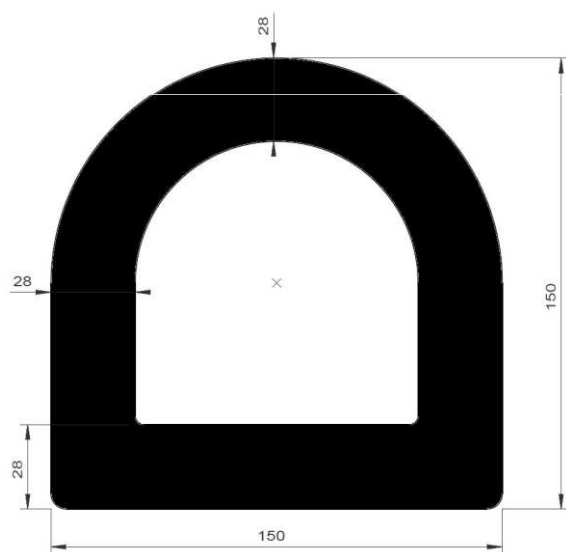

Reference	Dimensions	Minimum order	Colour	Avaibility
F 3630	150 X 150	10 m	Black	In stock
			Light grey	In stock
			Other	On production

Our fenders **in stock** are packed in **coils of 5 meters**.

We can deliver your fenders in **cut lengths** or in **coils of 25 meters maximum on production**.

You will find all our possibilities in **SERVICES**

DATA SHEET

PRODENE 404 quality

PROPERTIES	VALUES	STANDARDS
HARDNESS 5 SEC	57 SH A	ISO 868
DENSITY	1.09	ISO 2781
TENSILE STRENGTH AT BREAK	7.8 Mpa	ISO 37
ELONGATION AT BREAK	700%	ISO 37
D.R.C 24H at 23°C	20	ISO 815 type B
DRC 24H at 70°C	46	ISO 815 type B
TEMPERATURE RESISTANCE	-50°C to +75°C	
COLOUR	Colorable Beige	


PRODENE P404 is a thermoplastic elastomer rubber of TPS-SBS/S.E.B.S type.

This quality offers an **excellent resistance to atmospheric agents, to ageing , to U.V** and a good resistance to usual chemical products (excluding organic solvents, aromatic and vegetable oils)

PRODENE P404 is **100% recyclable**.



SERVICES

Corner fenders and closed fenders

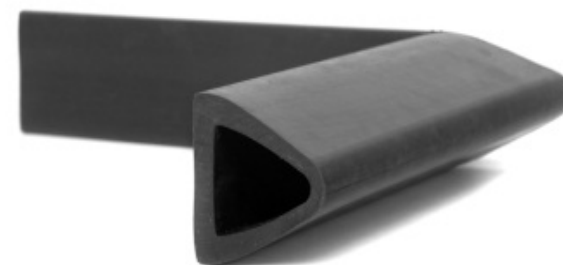


SERVICES

Lengths, drillings and fixings

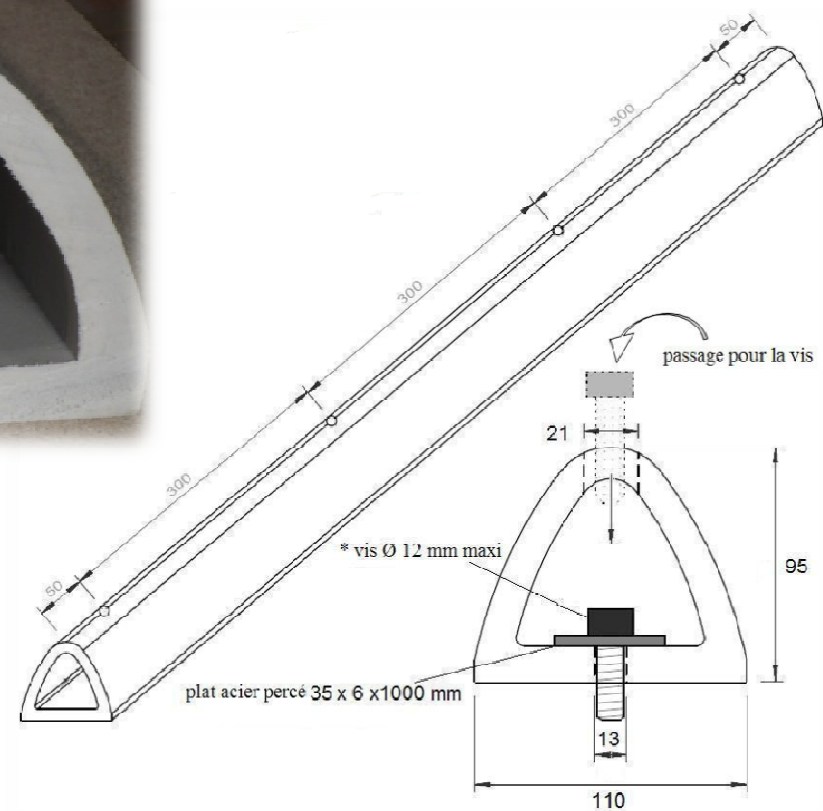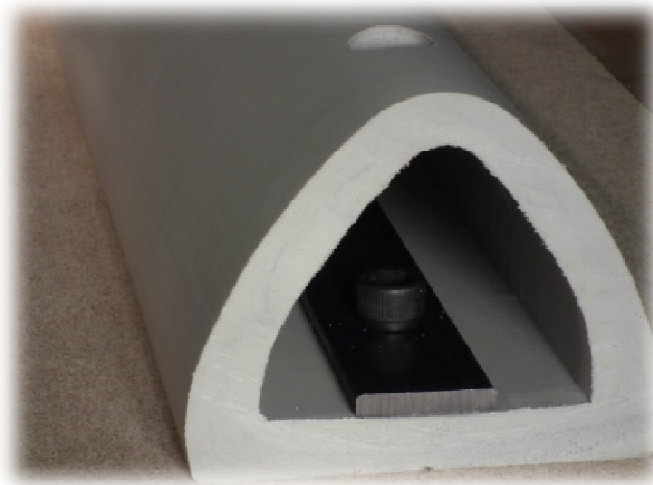



OUR OTHER PRODUCTS

Profiles for aluminium and wood joinery, door seals, profiles for curtain walling, verandas, partitions, expansion joints...

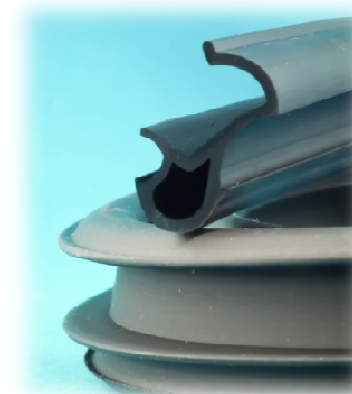

OUR OTHER PRODUCTS

Edge protectors, self-backing protections, profiles for food contact, antibacterial profiles, fire-retardant profiles...

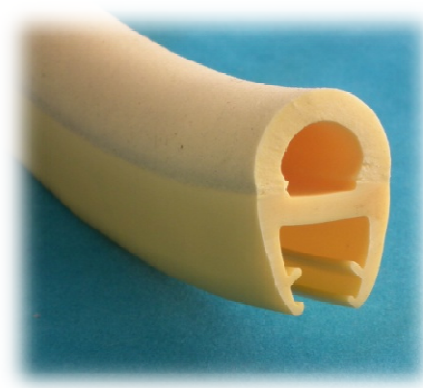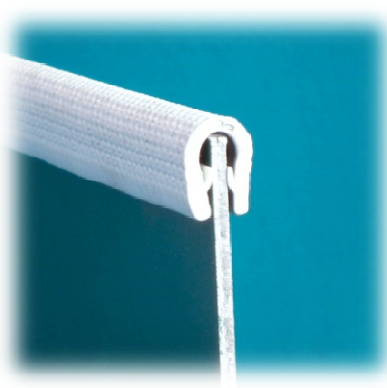

Complete catalogue available on our website

www.prodex-elastomeres.com



PR  DEX

Parc Industriel de Chartres-Gellainville
32 avenue Louis Pasteur 28630 GELLAINVILLE
FRANCE

Tel: +33 2 372 577-83 Fax: +33 2 372 599-84

Email: prodex2@wanadoo.fr