

**Increase your
visibility at sea,
before it's too late!**

available with:

- integrated VHF splitter
- integrated Wifi module
- integrated GPS antenna
- integrated DVB-T
- integrated N2K



**AIS transceiver for a greater
safety assurance**

easyTRX2S devices - increase the visibility at sea, before it is too late.

The easyTRX2S devices make your vessel visible to other ships with AIS receivers!

These transceivers send AIS signals and enables AIS messages to be received and displayed on a chart plotter or PC software, to easily identify foreign vessels.

Function

The easyTRX2S Series is based on modular manufacture. There are several different combinations possible:

- ✓ Integrated VHF splitter for usage of existing VHF antenna
- ✓ Integrated WiFi module for peer-to-peer-connection to iPad® or Android® Tablet as additional navigation place
- ✓ Integrated GPS antenna (only for polyester boats)
- ✓ Integrated DVB-T VHF splitter to create your own „TV sports bar“ aboard
- ✓ Integrated N2K adapter for plug into NMEA2000 data stream

FAQ's to the easyTRX2S

What is needed to run the easyTRX2S devices?

The easyTRX2S transceiver needs a separate GPS antenna, except variants with appendix „GPS“!

If your device has the appendix „IS“, the existing VHF antenna can be used. If there is no VHF antenna, the unit requires one.

Which devices are needed to work with the easyTRX2S?

Your plotter or PC software must be able to display the received AIS data.

Which SD Cards can be used?

By means of modified software and hardware SD Cards up to 32GB can be used for data recording.



PC with WinXP SP2 configured for a minimum screen resolution of 1024*768 for configuration software.

Highlights

- ✓ USB port for direct connection to PC
- ✓ Distance filter (5, 10, 15, 20, 25 miles)
- ✓ Plotter independent CPA alarm (closest point of approach)
- ✓ Plotter independent AIS S.A.R.T. alarm (e.g. easyRESCUE)
- ✓ Suppression of AIS targets beyond three miles and/or target without speed
- ✓ 38400 or 4800 Baud - selectable by software
- ✓ SD Card Recorder as Blackbox
- ✓ Multiplexer input
- ✓ Usage as signal source for external alerting device
- ✓ Easy installation

Technical Data

- ✓ AIS transceiver with BSH certification BSH/46162/4320939/10
- ✓ Integrated 1 transmitter / 2 receiver
- ✓ Sensitivity: -107dBmmin, typically -112dBm
- ✓ FM antenna connection: SO239, 50Ohm
- ✓ VHF radio connection: SO239, 50Ohm
- ✓ GPS antenna connector: BNC, 50Ohm
- ✓ NMEA output message: VDM
- ✓ Power: max. 4W
- ✓ Installation below deck, -25°C - 65°C
- ✓ Dimension: 198mm (L) x 161mm (W) x 31mm (H)
- ✓ Weight: approx. 800g

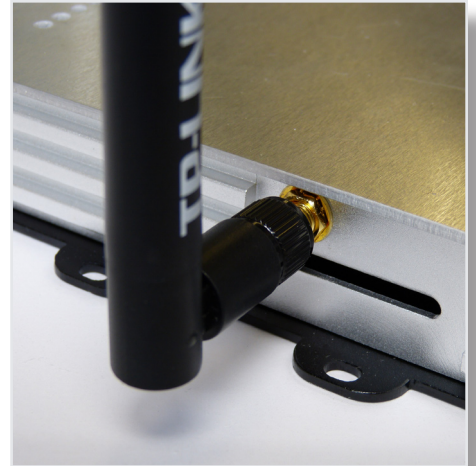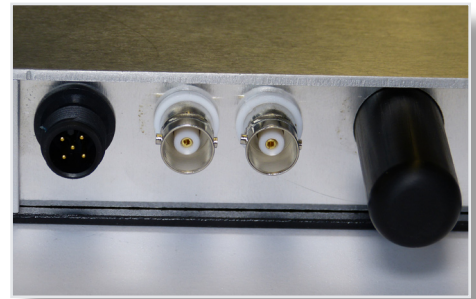

Made in Germany

for more information please visit
www.easyais.com

This produkt is available at:



Weatherdock AG

Sigmundstraße 180
D - 90431 Nürnberg
Tel.: +49 (0) 911 - 37 66 38 30
Fax: +49 (0) 911 - 37 66 38 40
Mail: info@weatherdock.de
URL: www.easyais.de

Stand: 10/2013 - Änderungen vorbehalten