


Reliability & efficiency down to a science.

Marine | RV | Industrial | Military | Street Lighting | Off-Grid

Get your money's worth with Genasun. The Genasun GV-5 MPPT controller sets a new standard for reliability. This 65W 5A 4-stage 12V battery charging MPPT solar charge controller with 99.85% peak efficiency extracts more power from any given panel than a PWM controller. And though PWMs may offer a lower controller cost, Genasun MPPT controller delivers more power – reducing the cost per watt by 10% - 30% and giving you more bang for your buck. Oh, and its ceramic capacitors will never wear out, allowing us to offer an industry-leading 10 year warranty.

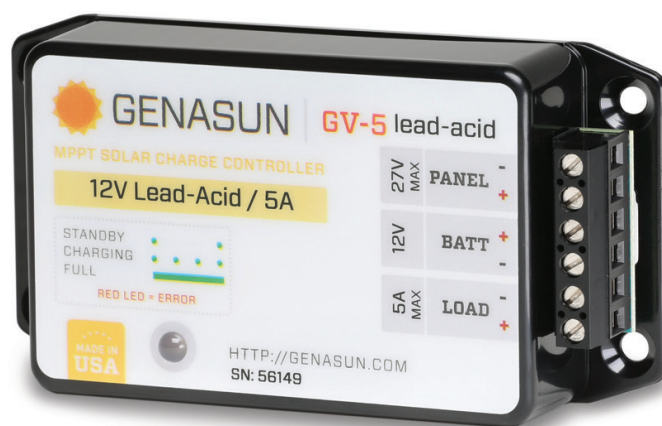

- Electrolytic-free, ceramic capacitors
- Ultra-fast true MPP Tracking
- Excellent low-light performance
- Compact for easy installation
- Great for lithium batteries

GV-5

5A @ 12V MPPT 65W

Take advantage of Genasun's advanced MPPT technology and enjoy more reliable power from smaller panels.



+10%

additional power
in the summer
No panel is too
hot to handle.



+30%

more power on
those shorter,
colder winter days.



+50%

increase in
energy harvest
from partially
shaded panels.

*Typical power gains from Genasun MPPT controllers vs the best PWM controllers available.



www.genasun.com **Sold through Blue Sky Energy**
(760) 597-1642 sales@blueskyenergyinc.com

Specifications:

GV-5-Pb-12V

GV-5-Li-*.*.V

Maximum Recommended Panel Power:	65W	GV-5-Li-10.7V	50W
		GV-5-Li-10.7V-SP	20W
		GV-5-Li-12.5V	55W
		GV5-Li-14.2V	65W
		GV5-Li-16.7V	75W
Rated Battery (Output) Current:	5A	5A (-SP model: 2A)	
Nominal Battery Voltage:	12V	N/A	
Max Panel Voltage (Voc):	27V	27V	
Recommended Max Voc at STC:	22V	22V	
Minimum Battery Voltage for Normal Operation:	7.2V	7.2V	
Trickle Charge to Recover Dead (OV) Battery:	Yes	Yes	
Input Voltage Range:	0-27V	0-27V	
Recommended Maximum Input Short Circuit Current (for Solar Use):	5A	5A (-SP model: 2A)	
Continuous Rated Load Current:	5A	5A	
Maximum Input Current *:	9A	9A	
Charge Profile:	Multi-Stage with Temperature Compensation	CC-CV	
Absorption Voltage:	14.2V	-	
Absorption Time:	2 hours	-	

*Maximum current that the controller could draw from an unlimited source.

Float Voltage (Pb models) or CV Voltage (Li models):	13.8V	GV-5-Li-10.7V (-SP)	10.7V
		GV-5-Li-12.5V	12.5V
		GV5-Li-14.2V	14.2V
		GV5-Li-16.7V	16.7V
Load (LVD) Disconnect/Reconnect Voltage:	11.4/12.5 V	GV-5-Li-10.7V (-SP)	8.2/9.0 V
		GV-5-Li-12.5V	9.3/10.5 V
		GV5-Li-14.2V	11.0/12.0 V
		GV5-Li-16.7V	12.4/14.0 V
Battery Temperature Compensation:	-28mV/°C	-	
Operating Temperature:	-40°C - 85°C	-40°C - 85°C	
Maximum Full Power Ambient:	50°C	50°C	
Electrical Efficiency:	96% - 99.85% typical	94% - 99.85% typical	
Tracking Efficiency:	99+% typical	99+% typical	
MPPT Tracking Speed:	15Hz	15Hz	
Operating Consumption:	0.150mA (150uA)	0.150mA (150uA)	
Night Consumption:	0.125mA (125uA)	0.125mA (125uA)	
Marine Grade:	Yes	Yes	
Connection:	6-position terminal block for 12-30AWG wire	6-position terminal block for 12-30AWG wire	
Weight:	2.8 oz., 80 g	2.8 oz., 80 g	
Dimensions:	4.3 x 2.2 x 0.9", 11 x 5.6 x 2.5 cm	4.3 x 2.2 x 0.9", 11 x 5.6 x 2.5 cm	
Warranty:	10 years	10 years	

Copyright © 2015 Blue Sky Energy. All rights reserved. Changes are periodically made to the information herein which will be incorporated in revised editions of this publication. Blue Sky Energy may make changes or improvements to the product(s) described in this publication at any time and without notice.