




Traffic Management

COM HUB | EDGE DEVICE

Synchronization and fusion
of up to 6 sensors

Data collection & storage

Ethernet and PLC
communication

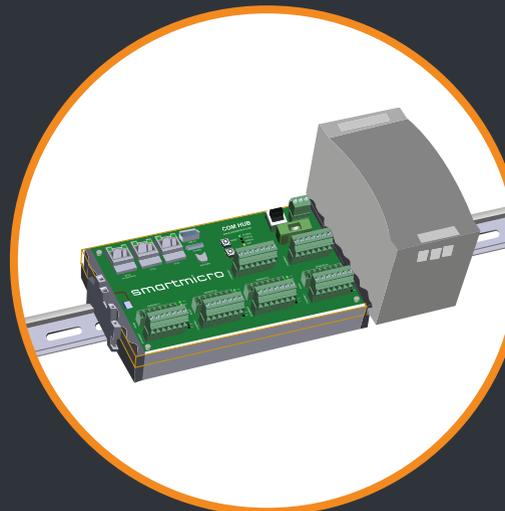

Expandable platform, i.e. for
V2X applications

Big data for central software
solutions

Remotely accessible

	COM HUB Sync	COM HUB Sync PLC
FEATURES		
	Built-in surge- and power protection	
	Three Ethernet interfaces for external modules, i.e. SDLC, V2X Module	
	WIFI communication	
	Up to 6 sensors	
	SD card and USB 3.0	
	Passthrough of MPEG video stream	
	Real-time clock	
	Pluggable terminal blocks for power and data interfaces	
	Status and activity LEDs for all interfaces	
	Time and acquisition synchronisation	
	Seamless tracking / Fusion tracking	
	Hybrid video and radar detection / Fusion tracking	
MECHANICAL		
Weight	2045 g / 72.1 oz	
Dimensions	500 x 125 x 126 mm / 19.68 x 4.92 x 4.96 in	
GENERAL		
Operating Temperature	-40...+71°C / -40...+160°F	
Operating Voltage / Power Supply	24 V	48 V
Interfaces	Ethernet, RS485	HD PLC
AVAILABLE ACCESSORIES		
	SDLC Module	
	Ethernet or RS485 J-Box	PLC J-Box

