




ORCHID ANCHOR WINDLASS

Orchid is a stainless steel AISI vertical windlass. Available in high or low profile version, with different motorizations, it is suggested for boats up to 22 meters. Orchid can bring 8mm, 10mm and 12mm chains and comes with built-in chain counter sensor. Possibility of 12V, 24V, 230V, 400V or hydraulic motorizations. Rope-chain system for 12mm chain compatible with 3-strand 18mm or 19 mm rope.



1500	A	B	C	D	E	F	G	H	I	L
	150	102	112	37-62	141	252	107	78	268	188
1700 5000	A	B	C	D	E	F	G	H	I	L
	150	102	112	37-62	174	330	107	78	268	188
2300	A	B	C	D	E	F	G	H	I	L
	150	102	212	37-64	190	439	107	100	268	188
2200AC	A	B	C	D	E	F	G	H	I	L
	150	102	112	37-62	174	350	107	78	268	188
HY2	A	B	C	D	E	F	G	H	I	L
	150	102	112	37-62	165	227	107	78	268	188
HY1	A	B	C	D	E	F	G	H	I	L
	150	102	112	37-62	174	232	107	78	268	188

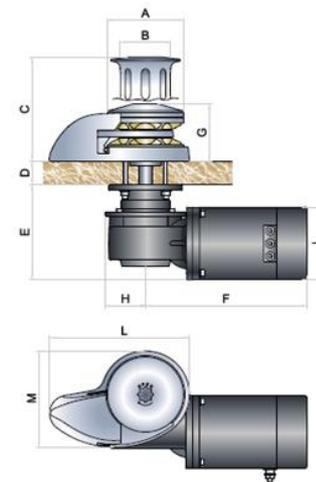

Tutte le misure indicate sono in mm
All sizes are in mm

CATENA	Barbotin / Gipsy	8mm				10mm		10 DIN 766		12mm		
	Catena supportata Chain supported	8mm ISO	8mm DIN766	5/16" G4	5/16" BBB	10mm ISO	3/8" G4	10mm DIN 766	3/8" BBB	12mm ISO	13mm DIN766	7/16" G4
	Cima supportata Rope supported	N/A				N/A				18mm – 19 mm 3 strand		

CARATTERISTICHE	POTENZA MOTORE <i>ELECTRIC MOTOR</i>	1500W	1500W	1700W	1700W	2000W	2000W	2300W	2200W	HY	HY
	TENSIONE DI ALIMENTAZIONE <i>MOTOR SUPPLY VOLTAGE</i>	12V	24V	12V	24V	24V	230/400V	24V	230/400V	N/A	N/A
	TIRO ISTANTANEO MASSIMO <i>MAXIMUM PULL</i>	1250Kg	1290Kg	1650Kg	1700Kg	1750Kg	1700Kg	2200Kg	2550Kg	380Kg	824Kg
	CARICO LAVORO AL SOLLEVAMENTO <i>LIFT WORKING LOAD</i>	170Kg	180Kg	240Kg	250Kg	270Kg	250Kg	500Kg	730Kg	380Kg	824Kg
	VELOCITÀ DI RECUPERO A CARICO <i>LINE SPEED</i>	12mt/min	12mt/min	12mt/min	12mt/min	12mt/min	12mt/min	12mt/min	12mt/min	12mt/min	12mt/min
	ASSORBIMENTO MEDIO <i>CURRENT ABSORPTION</i>	130A	70A	138A	75A	100A	N/A	120A	N/A	N/A	N/A
	PESO (SENZA CAMPANA) <i>WEIGHT (WITHOUT DRUM)</i>						←————— 25 to 35 Kg —————→				
PESO (CON CAMPANA) <i>WEIGHT (WITH DRUM)</i>						←————— 30 to 40 Kg —————→					

