


YACHT LIGHTS 2021

CABIN
DENMARK

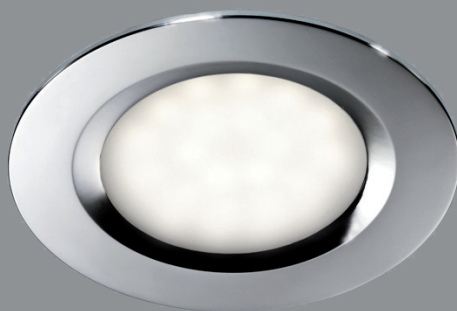

WORLD CLASS YACHT LIGHTS
SINCE 1977

YACHTLIGHTS 2021

CABIN
DENMARK

CABIN.DK G4 LED

G4 LED COB 10-30V 1WF / 2W 00.01

READING LIGHT

CABIN BRASS PVD 01.01
CABIN STAINLESS 01.02
OCEAN 01.03
NEW LINE 01.04
NEW CLASSIC 01.05
CONCORDE 01.06
CONCORDE II 01.07
CONCORDE STAINLESS 01.08
C-LED 01.09
T-LED 01.10
MINOR 01.11
SWING 01.12
SWING STAINLESS 01.13

CHART LIGHTS

CABIN 02.01
OCEAN 02.02
NEW LINE 02.03
NEW CLASSIC 02.04
MINOR 02.05
SWING 02.06
C-LED 02.07
DOUB-LED WALL 02.08
DOUB-LED TABLE 02.09
T-LED 02.10

LUZ

LUZ WALL 03.01
LUZ TABLE 03.02

CEILING LAMPS

ANNE BRASS PVD 04.01
ANNE STAINLESS 04.02
ANNE III 04.03
MIA BRASS PVD 04.04
MIA STAINLESS 04.05
MIA III 04.06

DOWN LIGHTS

5300 SERIES 05.08
CIRCLE II LED 05.09
QUATTRO II LED 05.10
5660 05.11

5521SS 06.01
5521-02SS 06.02
5581SS 06.03
5581SSS 06.04
5581SS MASTER SWITCH 06.05
5581SS REWH 06.06
5581AL 06.07
5581AL SWITCH 06.08
5581AL REWH 06.09

DOWN LIGHTS

5581WH 06.10
5581WH SWITCH 06.11
5581WH MASTER SWITCH 06.12
5581WH REWH 06.13
5581BLACK 06.14
5581-02WH 06.15
5583SS 06.16
5583SS SWITCH 06.17
5583SS MASTER SWITCH 06.18
5583SS REWH 06.19
5583AL 06.20
5583AL SWITCH 06.21
5583AL REWH 06.22
5583WH 06.23
5583WHS 06.24
5583WH MASTER SWITCH 06.25
5583WH REWH 06.26
5586WH 06.27
5586WH RE 06.28
5586WH REWH 06.29
LED DIMMER 06.30

POWER LINE LED

1070 SERIES 08.01
6000 SERIES 08.02
6100 SERIES 08.03

COURTESY LIGHTS

1000 SERIES 09.01
1006 SERIES 09.02
1008 SERIES 09.03
1009 SERIES 09.04
1010 SERIES 09.05

COURTESY LIGHTS

1016 SERIES 09.06
1018 SERIES 09.07
1019 SERIES 09.08
1030-2 SERIES 09.09
1036-2 SERIES 09.10
1038 SERIES 09.11
1039 SERIES 09.12
1039-2 SERIES 09.13
1116 SERIES 09.14

LED STRIPS

N-SERIES LED NEON 10.01 - 10.03
S-SERIES LED 10.04

MAST LED

SPREADER LED XL 6400 11.01
SPREADER LED 6500 11.02
BLUE SPREADER 6500 11.03
SPREADER LED 6510 11.04
SPREADER LED 6600 11.05
MAST LED 6800 11.06
MAST LED 6900 11.07
BOOM LED 6000 11.08
BOOM LED 6100 11.09
BIMINI LED 11.10
DIMMER FOR SPREADER 11.11
MOUNTING / LIGHT 11.12 - 11.14

NAVI LED

MASTHEAD + DECK 12.01
BICOLOR + DECK 12.01

YACHTLIGHTS 2021


MARINE GRADE G4 LED REPLACEMENT BULBS

CABIN
DENMARK

CABIN.DK G4 LED

The perfect LED replacement for lights with socket for G4 halogen bulbs.

Save 90% energy!
Light output: 120lm
Power consumption: 1W
Colour temp: 2700K
CRI > 80
Internal driver for 10-30VDC
Lifetime >15.000h
Dimensions: L 30mm, Ø 10mm

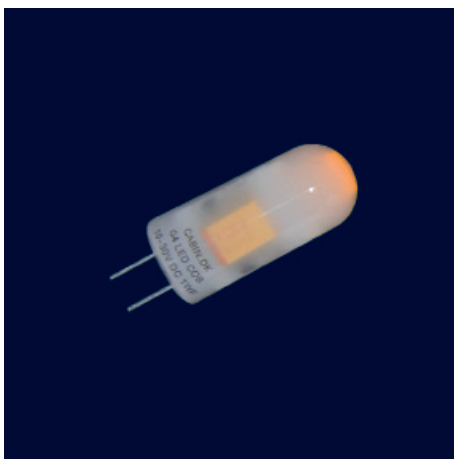

G4 LED COB 10-30V 1WF

FIT CABIN LIGHTS:

LH201WH


580C, 580G, 580WH
581C, 581WH
582C, 582WH
583C, 583G, 583MC, 583WH
585C, 585G, 585MC, 585WH
585-02C, 585-02G, 585-02WH
585-11C, 585-11G, 585-11WH
587C, 587G, 587WH
588C, 588G, 588WH
589C, 589G, 589WH
591-02BLACK

DOWNLIGHTS WITH G4 SOCKET
FROM OTHER MANUFACTURERS

CABIN.DK G4 LED

The perfect LED replacement for lights with socket for G4 halogen bulbs.

Save 80% energy!
Light output: 170lm
Power consumption: <2W
Colour temp: 2700K
CRI > 80
Internal driver for 10-30VDC
Lifetime >15.000h
Dimensions: L 35mm, Ø 10mm

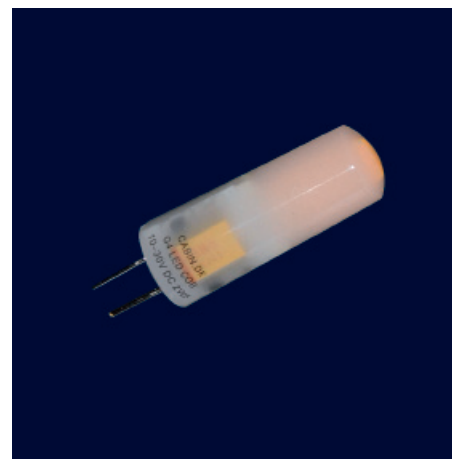

G4 LED COB 10-30V 2WF

FIT CABIN LIGHTS:

CABIN SMALL
CABIN SMALL CHART
CABIN MEDIUM
CABIN MEDIUM CHART
CABIN LARGE
OCEAN SMALL
OCEAN SMALL CHART
OCEAN MEDIUM
OCEAN MEDIUM CHART
ANNE
ANNE II
MIA
MIA II
NEW LINE
NEW LINE CHART
CONCORDE GLASS
CONCORDE STAINLESS
SWING GLASS
SWING STAINLESS
NEW CLASSIC
NEW CLASSIC CHART
MINOR
MINOR CHART
JAZZ
LUZ WALL
LUZ TABLE

LIGHTS WITH G4 SOCKET FROM
OTHER MANUFACTURERS

READING LIGHTS

CABIN
DENMARK



WORLD CLASS YACHT LIGHTS
SINCE 1977

CABIN BRASS PVD

PROBABLY THE MOST BEAUTYFUL YACHT LAMP AT SEA

CABIN
DENMARK

The Danish Frigast Cabin light gives your yacht a touch of luxury and old world charm that only meticulous and full attention to detail can convey.

Cabin small is perfect as a reading light by the berth or in the cabin in smaller yachts. For 30-50 foot yachts the Cabin medium is the better choice – whilst in larger yachts the Cabin large may be preferred.

All lights give excellent reading light with low power consumption.

Colour temperature: 2700k, CRI >85


Multivoltage 10V-30V.

LED models are mounted with one warm white power LED.

HLED lights are mounted with one warm white replaceable CABIN G4 LED.

The lifetime of the LED is more than 50.000h
G4 LED more than 15.000h.

	Small	Medium	Large
A	73mm 2.87in	90mm 3.54in	115mm 4.53in
B	115mm 4.53in	130mm 5.12in	172mm 6.77in
C	90mm 3.54in	90mm 3.54in	90mm 3.54in
D	110mm 4.33in	130mm 5.12in	156mm 6.14in



Model	Material	Finish	Bulb/LED	Part. No.
Cabin small	Stainless steel	Brass PVD	G4 LED 2WF	10HLED
Cabin small	Stainless steel	Brass PVD	LED 1,2W	10LED
Cabin medium	Stainless steel	Brass PVD	G4 LED 2WF	20HLED
Cabin medium	Stainless steel	Brass PVD	LED 1,2W	20LED
Cabin large	Brass	Lacquer	G4 LED 2WF	40HLED
Cabin large	Brass	Lacquer	LED 1,2W	40LED



CABIN MEDIUM BRASS PVD

CABIN STAINLESS

PROBABLY THE MOST BEAUTYFUL YACHT LAMP AT SEA

CABIN
DENMARK

The Danish Frigast Cabin light gives your yacht a touch of luxury and old world charm that only meticulous and full attention to detail can convey.

Cabin small is perfect as a reading light by the berth or in the cabin in smaller yachts.

For 30-50 foot yachts the Cabin medium is the better choice – whilst in larger yachts the Cabin large may be preferred.

All lights give excellent reading light with low power consumption.

Colour temperature: 2700k, CRI >85


Multivoltage 10V-30V.

LED models are mounted with one warm white power LED.

HLED lights are mounted with one warm white replaceable CABIN G4 LED.

The lifetime of the LED is more than 50.000h
G4 LED more than 15.000h.

	Small	Medium	Large
A	73mm 2.87in	90mm 3.54in	115mm 4.53in
B	115mm 4.53in	130mm 5.12in	172mm 6.77in
C	90mm 3.54in	90mm 3.54in	90mm 3.54in
D	110mm 4.33in	130mm 5.12in	156mm 6.14in

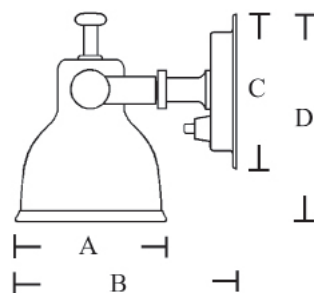

Model	Material	Finish	Bulb/LED	Part. No.
Cabin small	Stainless steel	Highly finished	G4 LED 2WF	11HLED
Cabin small	Stainless steel	Highly finished	LED 1,2W	11LED
Cabin medium	Stainless steel	Highly finished	G4 LED 2WF	21HLED
Cabin medium	Stainless steel	Highly finished	LED 1,2W	21LED
Cabin large	Brass	Chromium	G4 LED 2WF	41HLED
Cabin large	Brass	Chromium	LED 1,2W	41LED



CABIN MEDIUM STAINLESS STEEL

OCEAN

PROBABLY THE STRONGEST YACHT LAMP AT SEA

CABIN
DENMARK

This maintenance free OCEAN light is made of highly finished stainless steel and fitted with a badge made of PVD coated brass. The bell swivels smoothly in all directions.

The small model is perfect as a reading light by the berth or in the cabin in smaller yachts. In larger yachts the Ocean medium is the right choice.

All lights give excellent reading light with low power consumption.

Colour temperature: 2700k, CRI >85


Multivoltage 10V-30V.

LED models are mounted with one warm white power LED.

HLED lights are mounted with one warm white replaceable CABIN G4 LED.

The lifetime of the LED is more than 50.000h
G4 LED more than 15.000h.

Dimensions	Small	Medium
A	75mm 2.87in	90mm 3.54in
B	115mm 4.53in	130mm 5.12in
C	92mm 3.62in	92mm 3.62in
D	112mm 4.45in	130mm 5.12in

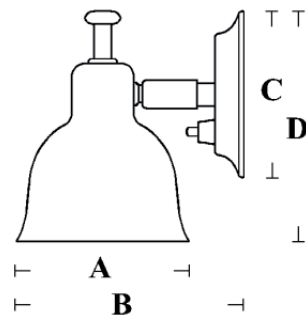

Model	Material	Finish	Bulb/LED	Part. No.
Ocean medium	Stainless steel	Highly finished	G4 LED 2W F	60HLED
Ocean medium	Stainless steel	Highly finished	LED 1,2W	60LED
Ocean small	Stainless steel	Highly finished	G4 LED 2W F	70HLED
Ocean small	Stainless steel	Highly finished	LED 1,2W	70LED



OCEAN MEDIUM

NEW LINE

CABIN
DENMARK


The NEW LINE range of lights is designed for use in smaller yachts or as reading light in any yacht. The bell swivels in all directions.

The lights are mounted with one warm white replaceable CABIN G4 LED witch give excellent reading light with low power consumption.

Colour temperature: 2700k, CRI >85
Multivoltage 10V-30V.

The lifetime of the LED is more than 15.000h.

Dimensions	mm	in
A	72	2.84
B	110	4.33
C	72	2.84
D	110	4.33

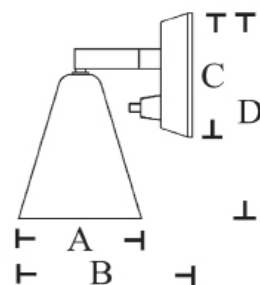

NEW LINE STAINLESS STEEL

Model	Material	Finish	Bulb/LED	Part. No.
New Line	Brass	Laquer	G4 LED 2W F	310HLED
New Line	Stainless steel	Highly finished	G4 LED 2W F	311HLED
New Line	Stainless steel	Brushed	G4 LED 2W F	311HLEDBRU

NEW CLASSIC

CABIN
DENMARK

New Classic is a range of lights with a soft timeless design meeting the demand for both reading and general light. The bell swivels smoothly in all directions to cast a pool of light wherever needed.

The lights give excellent reading light with low power consumption.

Colour temperature: 2700k, CRI >85


Multivoltage 10V-30V.

LED models are mounted with one warm white power LED.

HLED lights are mounted with one warm white replaceable CABIN G4 LED.

The lifetime of the LED is more than 50.000h
G4 LED more than 15.000h.

Dimensions	mm	in
A	80	3.15
B	130	5.12
C	92	3.62
D	130	5.12

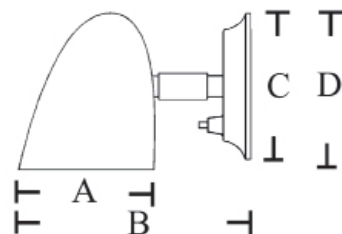

Model	Material	Finish	Bulb/LED	Part. No.
New Classic	Brass	Laquer	G4 LED	620HLED
New Classic	Brass	Laquer	LED 1,2W	620LED
New Classic	Brass	Anthracite	G4 LED	620HANLED
New Classic	Brass	Anthracite	LED 1,2W	620LEDAN
New Classic	Brass	Chromium	G4 LED	621HLED
New Classic	Brass	Chromium	LED 1,2W	621LED



NEW CLASSIC BRASS

CONCORDE

“MARTINI GLASS”

CABIN
DENMARK

The CONCORDE design with opal glass shade accommodate with all types of interior designs. The shade swivels in all directions.


The lights are mounted with one warm white replaceable CABIN G4 LED witch give exellent reading light with low power consumption.

Colour temperature: 2700k, CRI >85

Multivoltage 10V-30V.

The lifetime of the LED is more than 15.000h.

Dimensions	mm	in
A	110	4.33
B	140	5.51
C	92	3.62
D	130	5.10

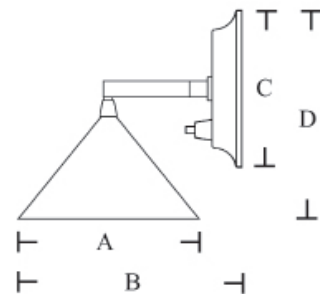

Model	Material	Finish	Bulb	Part. No.
Concorde White	Stainless steel	Highly finished	G4 LED 2W F	920WH
Concorde White	Brass	Lacquer	G4 LED 2W F	929WH



CONCORDE STAINLESS WHITE

CONCORDE II

CABIN
DENMARK

The CONCORD design with opal glass shade accommodate with all types of interior designs. The shade swivels in all directions.


The lights are mounted with one warm white replaceable CABIN G4 LED witch give exellent reading light with low power consumption.

Colour temperature: 2700k, CRI >85

Multivoltage 10V-30V.

The lifetime of the LED is more than 15.000h.

Dimensions	mm	in
A	110	4.33
B	140	5.51
C	72	2.84
D	95	3.75

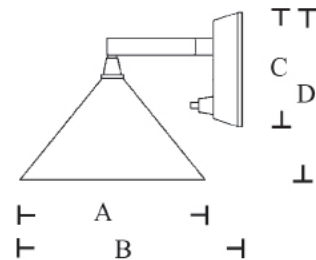

CONCORDE II STAINLESS WHITE

Model	Material	Finish	Bulb	Part. No.
Concorde Green	Stainless steel	Highly finished	G4 LED 2W F	911GR
Concorde White	Stainless steel	Highly finished	G4 LED 2W F	911WH

CONCORDE STAINLESS

CABIN
DENMARK

The CONCORD STAINLESS design accommodate with all types of modern interior designs. The shade swivels in all directions.


The lights are mounted with one warm white replaceable CABIN G4 LED witch give exellent reading light with low power consumption.

Colour temperature: 2700k, CRI >85

Multivoltage 10V-30V.

The lifetime of the LED is more than 15.000h.

Dimensions	mm	in
A	110	4.33
B	140	5.51
C	72	2.84
D	95	3.75

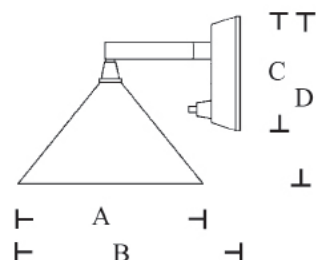

CONCORDE STAINLESS STEEL

Model	Material	Finish	Bulb/LED	Part. No.
Concorde	Stainless steel	Highly finished	G4 LED 2W F	326HLED
Concorde	Stainless steel	Brushed	G4 LED 2W F	326HLEDBRU

C-LED

CABIN
DENMARK


C-LED the revolution in Yacht lighting.
Breathtaking design, function and light
quality for modern Yachts.

C-LED lights are mounted with one warm
white Power LED which gives excellent
reading light with low power consumption.

Colour temperature: 2700k, CRI >85
Multivoltage 10V-30V.

The lifetime of the LED is more than
50.000h.

Dimensions	mm	in
A	35	1.35
B	70	2.75
C	45	1.75
D	85	3.38

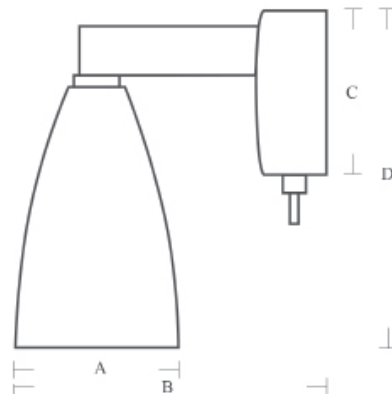

C-LED 1411



C-LED 1419



C-LED 1418

Model	Material	Finish	Bulb/LED	Part. No.
C-LED	Stainless steel	Highly finished	1,2W LED	1411
C-LED	Aluminum	Black	1,2W LED	1418
C-LED	Aluminum	Titan	1,2W LED	1419

T-LED

CABIN
DENMARK

T-LED the new Nordic-Design light for modern Yachts.

The T-LED is mounted with 6 warm white LEDs which gives excellent reading light with low power consumption.
Colour temperature: 2700k, CRI >85

12V DC (11-16V) 24V DC (23-29V)

The lifetime of the LED is more than 50.000h.

Dimensions	mm	in
A	34	1.34
B	88	3.46
C	51	2.00
D	125	4.92

Model	Material	Finish	Bulb/LED	Part. No.
T-LED	Stainless steel	Highly finished	1,5W LED	1421 12V
T-LED	Stainless steel	Highly finished	1,5W LED	1421 24V



T-LED 1421

MINOR

CABIN
DENMARK


The MINOR design with opal glass shade accommodate with all types of interior designs. The shade swivels in all directions.

The lights are mounted with one warm white replaceable CABIN G4 LED witch give excellent reading light with low power consumption.

Colour temperature: 2700k, CRI >85
Multivoltage 10V-30V.

The lifetime of the LED is more than 15.000h.

Dimensions	mm	in
A	70	2.75
B	110	4.33
C	72	2.84
D	110	4.33

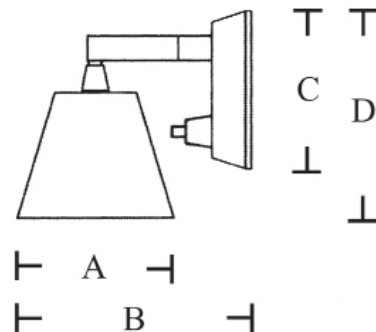

Model	Material	Finish	Bulb	Part. No.
Minor	Brass	Lacquer	G4 LED 2W F	900WH
Minor	Stainless steel	Highly finished	G4 LED 2W F	901WH



MINOR STAINLESS WHITE

SWING

CABIN
DENMARK

The soft SWING design with opal glass shade accommodate with all types of interior designs. The shade swivels in all directions.


The lights are mounted with one warm white replaceable CABIN G4 LED witch give excellent reading light with low power consumption.

Colour temperature: 2700k, CRI >85

Multivoltage 10V-30V.

The lifetime of the LED is more than 15.000h.

Dimensions	mm	in
A	70	2.75
B	110	4.33
C	72	2.84
D	110	4.33

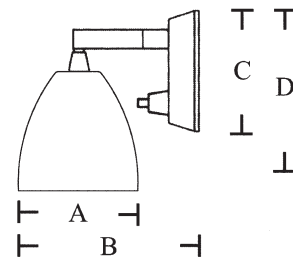

SWING STAINLESS WHITE

Model	Material	Finish	Bulb	Part. No.
Swing	Brass	Lacquer	G4 LED 2W F	940WH
Swing	Stainless steel	Highly finished	G4 LED 2W F	941WH

SWING STAINLESS

CABIN
DENMARK



The soft SWING design accommodate with all types of interior designs. The shade swivels in all directions.

The lights are mounted with one warm white replaceable CABIN G4 LED witch give excellent reading light with low power consumption.

Colour temperature: 2700k, CRI >85
Multivoltage 10V-30V.

The lifetime of the LED is more than 15.000h.

Dimensions	mm	in
A	70	2.75
B	110	4.33
C	72	2.84
D	110	4.33

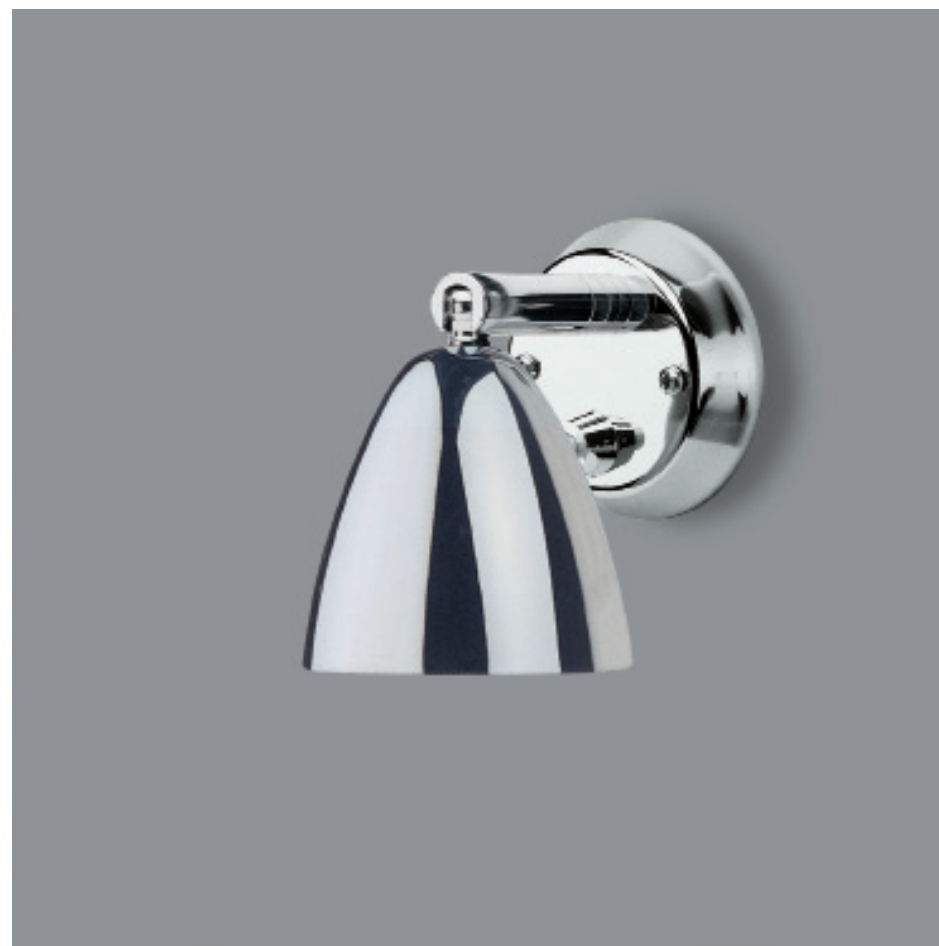

SWING STAINLESS STEEL

Model	Material	Finish	Bulb/LED	Part. No.
Swing	Stainless steel	Highly finished	G4 LED 2W F	341HLED

CHART TABLE LIGHTS

CABIN
DENMARK



WORLD CLASS YACHT LIGHTS
SINCE 1977

CABIN CHART

CABIN
DENMARK


The chart table version makes lighting more flexible - not only for chart reading, but also as normal reading light. The bell orients in all directions to give lights exactly where it is needed.

All lights give excellent reading light with low power consumption.
Colour temperature: 2700k, CRI >85
Multivoltage 10V-30V.

LED models are mounted with one warm white power LED.
HLED lights are mounted with one warm white replaceable CABIN G4 LED.

The lifetime of the LED is more than 50.000h
G4 LED more than 15.000h.

Dimensions	mm	in
A Small	75	2.96
A Medium	90	3.54
C	92	3.62
Flex arm	400	15.75

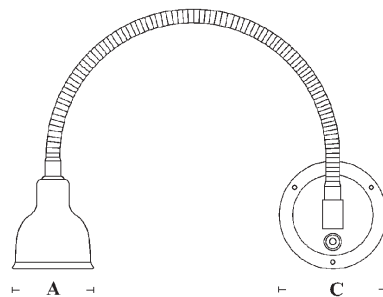

Model	Material	Finish	Bulb/LED	Part. No.
Cabin chart small	Stainless steel	Brass PVD	G4 LED 2W F	30HLED
Cabin chart small	Stainless steel	Brass PVD	LED 1,2W	30LED
Cabin chart small	Stainless steel	Highly finished	G4 LED 2W F	31HLED
Cabin chart small	Stainless steel	Highly finished	LED 1,2W	31LED
Cabin chart medium	Stainless steel	Brass PVD	G4 LED 2W F	50HLED
Cabin chart medium	Stainless steel	Brass PVD	LED 1,2W	50LED
Cabin chart medium	Stainless steel	Highly finished	G4 LED 2W F	51HLED
Cabin chart medium	Stainless steel	Highly finished	LED 1,2W	51LED



CABIN CHART MEDIUM BRASS PVD

OCEAN CHART

CABIN
DENMARK


The chart table version makes lighting more flexible - not only for chart reading, but also as normal reading light. The bell orients in all directions to give lights exactly where it is needed.

All lights give excellent reading light with low power consumption.
Colour temperature: 2700k, CRI >85
Multivoltage 10V-30V.

LED models are mounted with one warm white power LED.
HLED lights are mounted with one warm white replaceable CABIN G4 LED.

The lifetime of the LED is more than 50.000h
G4 LED more than 15.000h.

Dimensions	mm	in
A Small	75	2.96
A Medium	92	3.62
C	92	3.62
Flex arm	400	15.75

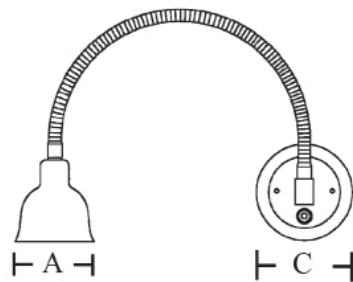

OCEAN CHART SMALL

Model	Material	Finish	Bulb/LED	Part. No.
Ocean chart small	Stainless steel	Highly finished	G4 LED 2W F	36HLED
Ocean chart small	Stainless steel	Highly finished	LED 1,2W	36LED
Ocean chart medium	Stainless steel	Highly finished	G4 LED 2W F	56HLED
Ocean chart medium	Stainless steel	Highly finished	LED 1,2W	56LED

NEW LINE CHART

CABIN
DENMARK


The New Line chart table version makes lighting more flexible - not only for chart reading, but also as normal reading light. The bell orients in all directions to give light exactly where it is needed.

The lights are mounted with one warm white replaceable CABIN G4 LED which give excellent reading light with low power consumption.

Colour temperature: 2700k, CRI >85
Multivoltage 10V-30V.

The lifetime of the LED is more than 15.000h.

Dimensions	mm	in
A	72	2.84
C	72	2.84
Flex arm	400	15.75

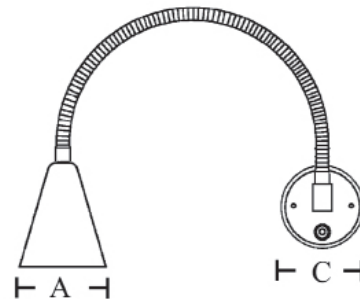

Model	Material	Finish	Bulb/LED	Part. No.
New Line chart	Brass	Lacquer	G4 LED 2W F	330HLED
New Line chart	Stainless steel	Highly finished	G4 LED 2W F	331HLED
New Line chart	Stainless steel	Brushed	G4 LED 2W F	331HLEDBRU



NEW LINE CHART BRASS

NEW CLASSIC CHART

CABIN
DENMARK


The New Classic chart table version makes lighting more flexible - not only for chart reading, but also as normal reading light. The bell orients in all directions to give light exactly where it is needed.

The lights give excellent reading light with low power consumption.
Colour temperature: 2700k, CRI >85
Multivoltage 10V-30V.

LED models are mounted with one warm white power LED.
HLED lights are mounted with one warm white replaceable CABIN G4 LED.

The lifetime of the LED is more than 50.000h
G4 LED more than 15.000h.

Dimensions	mm	in
A	80	3.15
C	92	6.62
Flex arm	400	15.75



Model	Material	Finish	Bulb/LED	Part. No.
New Classic chart	Brass	Lacquer	G4 LED 2W F	650HLED
New Classic chart	Brass	Lacquer	LED 1,2W	650LED
New Classic chart	Brass	Anthracite	G4 10W / G4 LED	650HLEDAN
New Classic chart	Brass	Anthracite	LED 1,2W	650LEDAN
New Classic chart	Brass	Chromium	G4 10W / G4 LED	651HLED
New Classic chart	Brass	Chromium	LED 1,2W	651LED



NEW CLASSIC CHART CHROMIUM

MINOR CHART

CABIN
DENMARK


The chart table version makes lighting more flexible - not only for chart reading, but also as normal reading light. The bell orients in all directions to give light exactly where it is needed.

The lights are mounted with one warm white replaceable CABIN G4 LED which give excellent reading light with low power consumption.

Colour temperature: 2700k, CRI >85
Multivoltage 10V-30V.

The lifetime of the LED is more than 15.000h.

Dimensions	mm	in
A	70	2.75
C	72	2.84
Flex arm	400	15.75

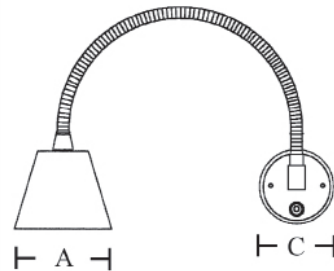

Model	Material	Finish	Bulb	Part. No.
Minor chart	Brass	Lacquer	G4 LED 2W F	930WH
Minor chart	Stainless steel	Highly finished	G4 LED 2W F	931WH



MINOR CHART BRASS WHITE

SWING CHART

CABIN
DENMARK


The chart table version makes lighting more flexible - not only for chart reading, but also as normal reading light. The bell orients in all directions to give light exactly where it is needed.

The lights are mounted with one warm white replaceable CABIN G4 LED witch give excellent reading light with low power consumption.

Colour temperature: 2700k, CRI >85
Multivoltage 10V-30V.

The lifetime of the LED is more than 15.000h.

Dimensions	mm	in
A	70	2.75
C	72	2.84
Flex arm	400	15.75



Model	Material	Finish	Bulb	Part. No.
Swing chart	Brass	Lacquer	G4 LED 2W F	960WH
Swing chart	Stainless steel	Highly finished	G4 LED 2W F	961WH



SWING CHART BRASS WHITE

C-LED CHART

CABIN
DENMARK


C-LED the revolution in Yacht lighting.
Breathtaking design, function and light
quality for modern Yachts.

C-LED lights are mounted with one warm
white Power LED which gives excellent
reading light with low power consumption.

Colour temperature: 2700k, CRI >85
Multivoltage 10V-30V.

The lifetime of the LED is more than
50.000h.

Dimensions	mm	in
A	35	1.35
C	45	1.75
Flex arm	250	9.85

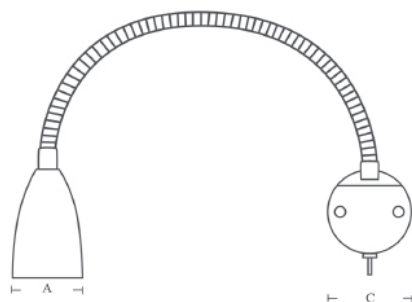

C-LED CHART ALUMINUM TITAN

Model	Material	Finish	LED	Part. No.
C-LED FLEX	Stainless steel	Highly finished	1,2W LED	1431
C-LED FLEX	Aluminum	Black	1,2W LED	1438
C-LED FLEX	Aluminum	Titan	1,2W LED	1439

DOUB-LED

TWO COLORED LED CHART TABLE LIGHT

CABIN
DENMARK

DOUB-LED chart table light with warm white reading light and red night light.
For wall mounting.
Mounted with a three direction switch.
Left: white - Right: red - Middle: off
Life time of LED >50.000h
Power consumption 1.5W white, 0.5W red.

Dimensions:

Head/tube	L 125mm
	Diameter 22mm
Base	Diameter 45mm
Flex-arm	L 250mm

Model	Material	Finish	LED	Part. No.
DOUB-LED Wall	Stainless steel	Highly finished	12 + 8 LED	1441 REWH 12V
DOUB-LED Wall	Stainless steel	Highly finished	12 + 8 LED	1441 REWH 24V



DOUB-LED WALL MOUNTED

DOUB-LED

TWO COLORED LED CHART TABLE LIGHT


CABIN
DENMARK

DOUB-LED chart table light with warm white reading light and red night light.
For table mounting.
Mounted with a three direction switch.
Left: white - Right: red - Middle: off
Life time of LED >50.000h
Power consumption 1.5W white, 0.5W red.


Dimensions:

Head/tube	L 125mm
	Diameter 22mm
Base	Diameter 51mm
Flex-arm	L 350mm

Model	Material	Finish	LED	Part. No.
DOUB-LED Table	Stainless steel	Highly finished	12 + 8 LED	1441T REWH 12V
DOUB-LED Table	Stainless steel	Highly finished	12 + 8 LED	1441T REWH 24V

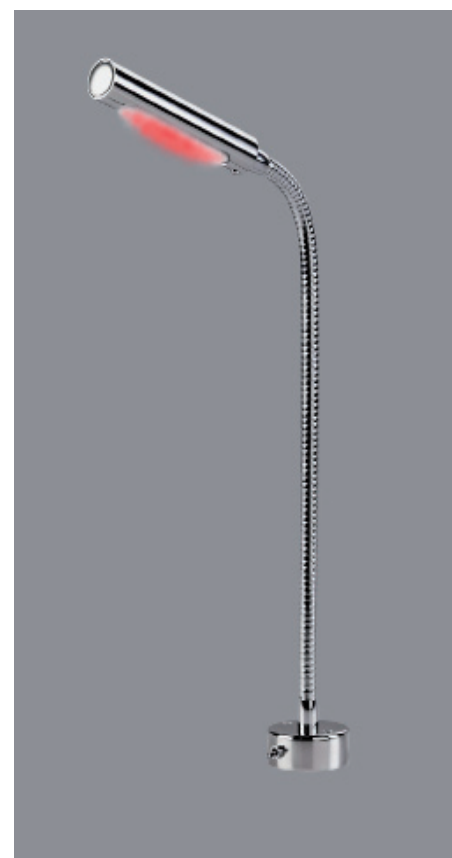

DOUB-LED TABLE MOUNTED

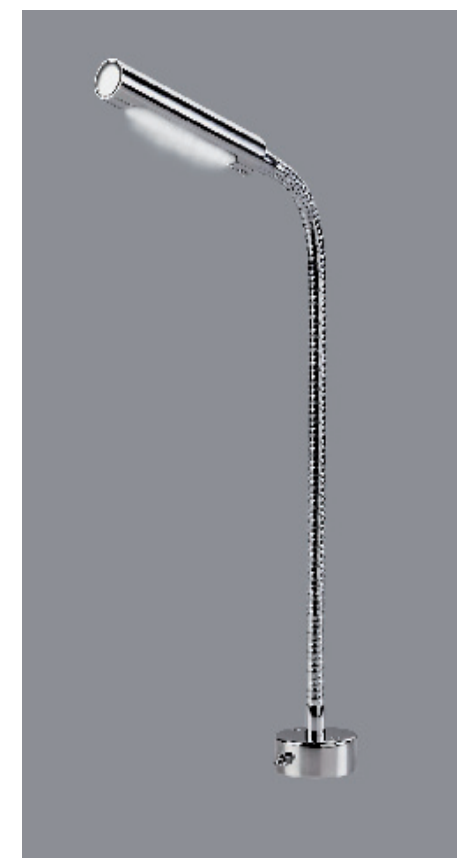

DOUB-LED TABLE MOUNTED

T-LED FLEX

CABIN
DENMARK

T-LED the new Nordic-Design light for modern Yachts.

The T-LED is mounted with 6 warm white LEDs which gives excellent reading light with low power consumption.
Colour temperature: 2700k, CRI >85

Dimensions	mm	in
A	34	1.35
C	51	2,00
Flex arm	200	9.85

Internal driver for:
12V DC (11-16V) 24V DC (23-29V)

The lifetime of the LED is more than 50.000h.

Model	Material	Finish	LED	Part. No.
T-LED FLEX	Stainless steel, 200mm flex	Highly finished	1,5W LED	1451T 300 12V
T-LED FLEX	Stainless steel, 200mm flex	Highly finished	1,5W LED	1451T 300 24V



T-LED FLEX



X-YACHTS OF DENMARK
LUZ WALL LAMP IN
OWNERS CABIN X-65

LUZ WALL


CABIN
DENMARK

The exclusive design makes LUZ fit into modern interiors.
The curved shade gives a soft light, and can be placed wherever you want to play with light.
The smoothness of the light contributes to a harmonic environment and makes you feel at home.

LUZ lights are mounted with one warm white replaceable CABIN G4 LED witch give excellent light with low power consumption.
Colour temperature: 2700k, CRI >85
Multivoltage 10V-30V.

The lifetime of the LED is more than 15.000h.

Dimensions	mm	in
A	190	7.50
B	240	9.50
C	230	9.10
D	130	5.12



LUZ WALL LAMP

Model	Material	Finish	Bulb	Part. No.
Luz Wall	Stainless steel	Highly finished	G4 LED 2W F	2011WH

LUZ TABLE

CABIN
DENMARK

The exclusive design makes LUZ fit into modern interiors.

The curved shade gives a soft light, and can be placed wherever you want to play with light.

The smoothness of the light contributes to a harmonic environment and makes you feel at home.


LUZ lights are mounted with one warm white replaceable CABIN G4 LED witch give excellent light with low power consumption.

Colour temperature: 2700k, CRI >85

Multivoltage 10V-30V.

The lifetime of the LED is more than 15.000h.

Dimensions	mm	in
A	200	7.90
B	450	17.75
C	40	1.57
D	150	2.17

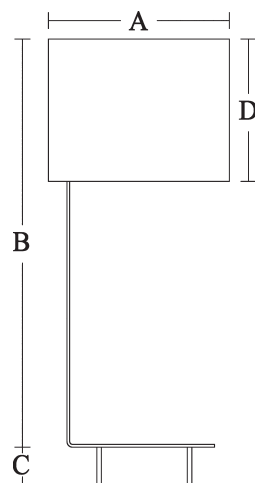

Model	Material	Finish	Bulb	Part. No.
Luz Table	Stainless steel	Highly finished	G4 LED 2W F	2511WH



LUZ TABLE LAMP

CEILING LIGHTS

CABIN
DENMARK



WORLD CLASS YACHT LIGHTS
SINCE 1977

ANNE

CABIN
DENMARK

These surface mounted ceiling lights complete the Cabin and Ocean range.

The Cabin Anne is the perfect choice for smaller and medium yachts.

The lights are available with or without switch. Also available with additional nightlight from 8 red LED's.

All lights give excellent light with low power consumption.

Colour temperature: 2700k, CRI >85


Multivoltage 10V-30V.

LED models are mounted with three warm white Power LED's.

HLED lights are mounted with one warm white replaceable CABIN G4 LED.

The lifetime of the LED's is more than 50.000h.
G4 LED more than 15.000h.

Dimensions	mm	in
A	165	6.50
B	45	1.77



ANNE BRASS PVD

Model	Material	Finish	Bulb/LED	Part. No.
ANNE	Stainless steel	Brass PVD	G4 LED 2W F	160HLED
ANNE	Stainless steel	Brass PVD	G4 LED 2W F	160HSLED
ANNE	Stainless steel	Brass PVD	3x1,2W LED	160LED
ANNE	Stainless steel	Brass PVD	3x1,2W LED	160LEDS
ANNE	Stainless steel	Brass PVD	3x1,2W LED	160LEDS 2B12V
ANNE	Stainless steel	Brass PVD	3x1,2W LED	160LEDS 2B24V
	S=SWITCH	2B = WHITE POWER LED + RED NIGHTLIGHT		

ANNE

CABIN
DENMARK

These surface mounted ceiling lights complete the Cabin and Ocean range.

The Cabin Anne is the perfect choice for smaller and medium yachts.

The lights are available with or without switch. Also available with additional nightlight from 8 red LED's.

All lights give excellent light with low power consumption.

Colour temperature: 2700k, CRI >85


Multivoltage 10V-30V.

LED models are mounted with three warm white Power LED's.

HLED lights are mounted with one warm white replaceable CABIN G4 LED.

The lifetime of the LED's is more than 50.000h.
G4 LED more than 15.000h.

Dimensions	mm	in
A	165	6.50
B	45	1.77



ANNE STAINLESS STEEL

Model	Material	Finish	Bulb/LED	Part. No.
ANNE	Stainless steel	Highly finished	G4 LED 2W F	161HLED
ANNE	Stainless steel	Highly finished	G4 LED 2W F	161HSLED
ANNE	Stainless steel	Highly finished	3x1,2W LED	161LED
ANNE	Stainless steel	Highly finished	3x1,2W LED	161LEDS
ANNE	Stainless steel	Highly finished	3x1,2W LED	161LEDS 2B12V
ANNE	Stainless steel	Highly finished	3x1,2W LED	160LEDS 2B24V
	S=SWITCH	2B = WHITE POWER LED + RED NIGHTLIGHT		

ANNE III

CABIN
DENMARK

These surface mounted ceiling lights complete the Cabin and Ocean range.

The Cabin Anne III is the perfect choice for smaller and medium yacht

The lights give excellent light with low power consumption.

Colour temperature: 2700k, CRI >85
Multivoltage 10V-30V.

The lights are mounted with three warm white Power LED's.

The lifetime of the LEDs is more than 50.000h.

Dimensions	mm	in
A	155	6.30
B	32	1.26



Model	Material	Finish	LED	Part. No.
ANNE III	Brass	Laquer	3x1,2W LED	140LED
ANNE III	Stainless steel	Highly finished	3x1,2W LED	146LED



ANNE III BRASS

MIA

CABIN
DENMARK

These surface mounted ceiling lights complete the Cabin and Ocean range.

The Cabin Mia is the perfect choice for medium and larger yachts.

The lights are available with or without switch. Also available with additional nightlight from 8 red LED's.

All lights give excellent light with low power consumption.

Colour temperature: 2700k, CRI >85

Multivoltage 10V-30V.

LED models are mounted with three warm white Power LED's.

HLED lights are mounted with one warm white replaceable CABIN G4 LED.

The lifetime of the LED's is more than 50.000h.
G4 LED more than 15.000h.

Dimensions	mm	in
A	200	7.88
B	55	2.17



MIA BRASS PVD

Model	Material	Finish	Bulb/LED	Part. No.
MIA	Stainless steel	Brass PVD	G4 LED 2W F	200HLED
MIA	Stainless steel	Brass PVD	G4 LED 2W F	200HSLED
MIA	Stainless steel	Brass PVD	3x1,2W LED	200LED
MIA	Stainless steel	Brass PVD	3x1,2W LED	200LEDS
MIA	Stainless steel	Brass PVD	3x1,2W LED	200LEDS 2B 12V
MIA	Stainless steel	Brass PVD	3x1,2W LED	200LEDS 2B 24V
	S=SWITCH	2B = WHITE POWER LED + RED LED		

MIA

CABIN
DENMARK

These surface mounted ceiling lights complete the Cabin and Ocean range.

The Cabin Mia is the perfect choice for medium and larger yachts.

The lights are available with or without switch. Also available with additional nightlight from 8 red LED's.

All lights give excellent light with low power consumption.

Colour temperature: 2700k, CRI >85

Multivoltage 10V-30V.

LED models are mounted with three warm white Power LED's.

HLED lights are mounted with one warm white replaceable CABIN G4 LED.

The lifetime of the LED's is more than 50.000h.

G4 LED more than 15.000h.

Dimensions	mm	in
A	200	7.88
B	55	2.17



Model	Material	Finish	Bulb/LED	Part. No.
MIA	Stainless steel	Highly finished	G4 LED 2W F	201HLED
MIA	Stainless steel	Highly finished	G4 LED 2W F	201HSLED
MIA	Stainless steel	Highly finished	3x1,2W LED	201LED
MIA	Stainless steel	Highly finished	3x1,2W LED	201LEDS
MIA	Stainless steel	Highly finished	3x1,2W LED	201LEDS 2B 12V
MIA	Stainless steel	Highly finished	3x1,2W LED	201LEDS 2B 24V
	S=SWITCH	2B = WHITE POWER LED + RED LED		



MIA STAINLESS STEEL

MIA III

CABIN
DENMARK

These surface mounted ceiling lights complete the Cabin and Ocean range.

The Cabin Mia III is the perfect choice for smaller and medium yacht


The lights give excellent light with low power consumption.

Colour temperature: 2700k, CRI >85
Multivoltage 10V-30V.

The lights are mounted with three warm white Power LED's.

The lifetime of the LEDs is more than 50.000h.

Dimensions	mm	in
A	195	7.68
B	32	1.26




Model	Material	Finish	LED	Part. No.
MIA III	Stainless steel	Brass PVD	3x1,2W LED	180LED
MIA III	Stainless steel	Highly finished	3x1,2W LED	181LED



MIA III BRASS PVD

LED DOWN LIGHTS

CABIN
DENMARK

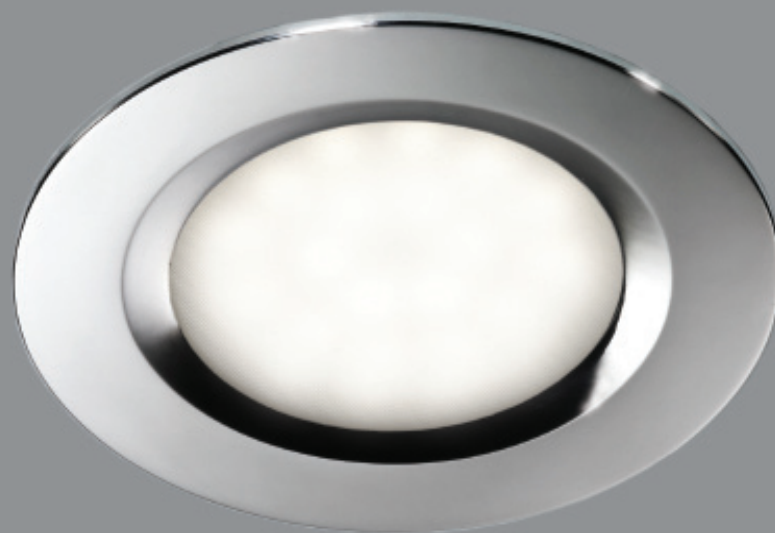

WORLD CLASS YACHT LIGHTS
SINCE 1977

DOWNLIGHT 5300

CABIN
DENMARK


Recessed LED downlight.
Turned lampbody made of aluminum.

Save energy with LED downlight!
The warm white power LED's give excellent
light with a minimum of power consumption.

LED: 3
Light output: 320lm
Power consumption: 3,6W
Colour temperature: 2700k
CRI >85
Lightcone: 36°
Lifetime >50.000h
Fixing: 2 springs

Internal driver for 12V-24V DC.

Dimensions	mm	in
A	55	2.17
B	2	0.08
C	34	1.34
D	45	1.77

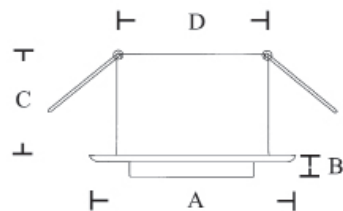

DOWNLIGHT 5300WH

Model	Material	Finish	LED	Part. No.
5300WH	Aluminium	White laquered	3x1,2W LED	5300WH

DOWNLIGHT CIRCLE II

5500 SERIES

CABIN
DENMARK


Recessed tiltable LED downlight.
Unique construction with 2mm stainless steel
house and black aluminum lamp holder.

Save energy with LED downlight!
The warm white power LED's give excellent
light with a minimum of power consumption.

LED: 3
Light output: 320lm
Power consumption: 3,6W
Colour temperature: 2700k
CRI >85
Lightcone: 36°
Lifetime >50.000h
Fixing: 2 springs

Internal driver for 12V-24V DC.

Dimensions	mm	in
A	75	2.95
B	2	0.08
C	34	1.34
D	55	2.17



DOWNLIGHT CIRCLE II LED

Model	Material	Finish	LED	Part. No.
CIRCLE II LED	Stainless steel	Highly finished	3x1,2W LED	5500-11
CIRCLE II LED	Stainless steel	Brushed	3x1,2W LED	5500-11BRU

DOWNLIGHT QUATTRO II

5510 SERIES

CABIN
DENMARK


Recessed tiltable LED downlight.
Unique construction with 2mm stainless steel house and black aluminum lamp holder.

Save energy with LED downlight!
The warm white power LED's give excellent light with a minimum of power consumption.

LED: 3
Light output: 320lm
Power consumption: 3,6W
Colour temperature: 2700k
CRI >85
Lightcone: 36°
Lifetime >50.000h
Fixing: 2 springs

Internal driver for 12V-24V DC.

Dimensions	mm	in
A	75x75	2.95x2.95
B	2	0.08
C	34	1.34
D	55	2.17



DOWNLIGHT QUATTRO II LED

Model	Material	Finish	LED	Part. No.
Quattro II LED	Stainless steel	Highly finished	3x1,2W LED	5510-11
Quattro II LED	Stainless steel	Brushed	3x1,2W LED	5510-11BRU



X-YACHTS OF DENMARK
LED DOWNLIGHT 5510-11
IN X-65

DOWNLIGHT 5660

LED IP67


CABIN
DENMARK

IP67 downlight for outdoor use.
Made of turned stainless steel AISI 316.

LED: 3
Power consumption: 3,6W
Colour temperature: 2700k
CRI >85
Other colour temperatur on request.
Lightcone: 36°
Lifetime >50.000h
Fixing: 2 springs
IP 67

Internal driver for 12V-24V DC.

Dimensions	mm	in
A	65	2.56
B	3	0.14
C	30	1.18
D	45	1.73

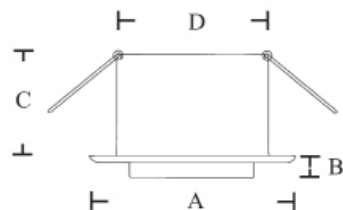

Model	Material	Finish	LED	Part. No.
5660	Stainless AISI 316	Highly finished	3x1,2W LED	5660

DOWNLIGHT

5521 SERIES

IP65

CABIN
DENMARK

Recessed LED downlight for screw fixing.
Turned lampbody made of aluminum and
cover of stainless steel.

The warm white power LED's give excellent
light with a minimum of power consumption.
Dimmable with PWM dimmer.

LED: 18

Light output: 170lm

Power consumption: 2W

Colour temperature: 2700k

CRI >90


Lightcone: 120°

Lifetime >50.000h

Fixing: 3 screws

IP 65

Internal driver for 12V DC (11-16V)

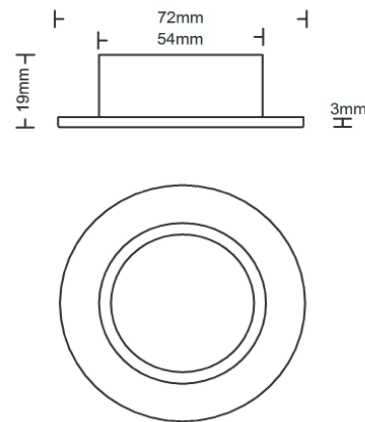

DOWNLIGHT 5521SS

Model	Material	Finish	LED	Part. No.
5521SS	Stainless +Alum	Highly finished	18x0.1W LED	5521SS

DOWNLIGHT

5521-02 SERIES

IP65

CABIN
DENMARK

Surface mounted LED downlight for screw fixing.
Turned lampbody made of aluminum and cover of stainless steel.

The warm white power LED's give excellent light with a minimum of power consumption.
Dimmable with PWM dimmer

LED: 18

Light output: 170lm

Power consumption: 2W

Colour temperature: 2700k

CRI >90



Lightcone: 120°

Lifetime >50.000h

Fixing: 3 screws

IP 65

Internal driver for 12V DC (11-16V)

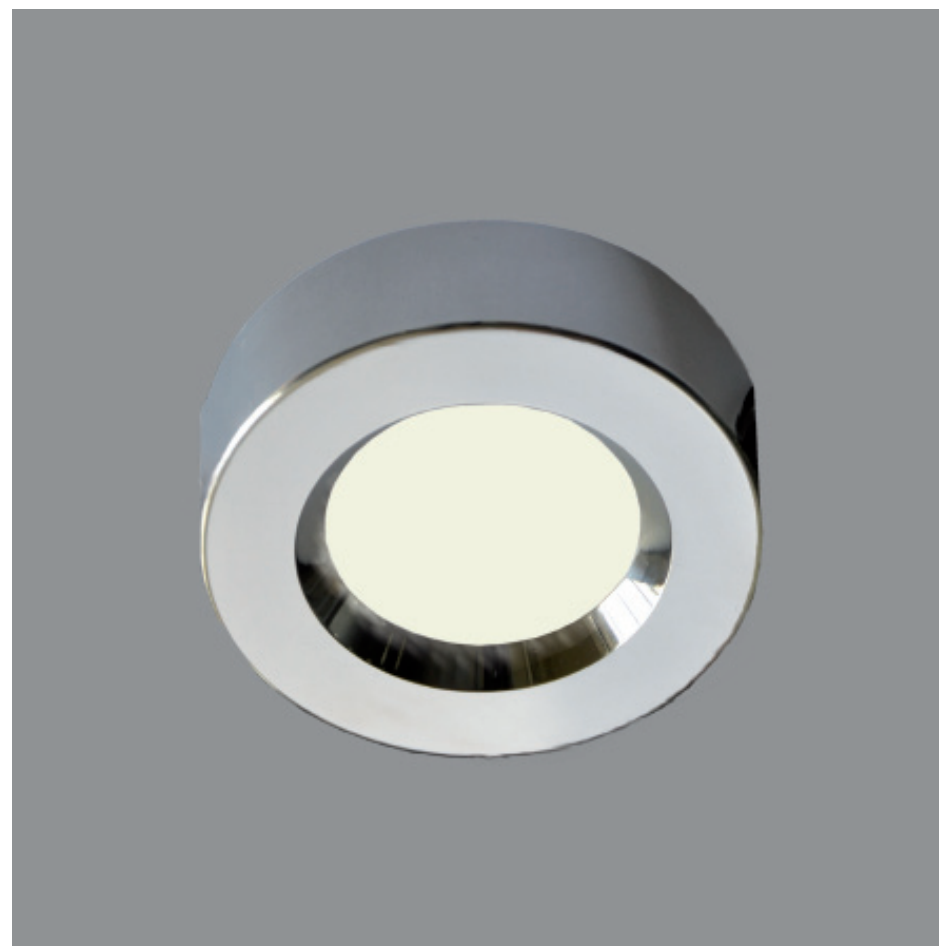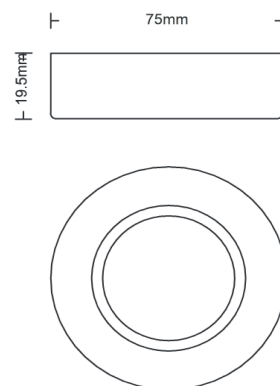

DOWNLIGHT 5521-02SS

Model	Material	Finish	LED	Part. No.
5521-02SS	Stainless +Alum	Highly finished	18x0.1W LED	5521-02SS

DOWNLIGHT 5581SS

LED

CABIN
DENMARK

The ultimate LED downlight for small and medium yachts.

- Excellent warm white light
- Low power consumption
- Low heat
- Long life
- Small dimensions
- Dimmable with PWM dimmer


Also ideal for replacement of halogen downlights with 55mm cut-out.

LED: 18
Light output: 170lm
Power consumption: 2W
Colour temp: 3000K
CRI> 80
Lightcone>120°
Lifetime>40.000h
Fixing: 2 springs
IP65

Internal driver for 12V DC (11-16V)

Internal driver for 24V DC (23-29V)

Dimensions	mm	in
A	70	2.75
B	2	0.08
C	18	0.70
D	55	2.17

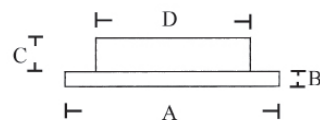

DOWNLIGHT 5581SS

Model	Material	Finish	LED	Part. No.
5581SS	Stainless/alu.	Highly finished	18x0,1W LED	5581SS
5581SS	Stainless/alu.	Highly finished	18x0,1W LED	5581SS 24V

DOWNLIGHT 5581SS SWITCH

LED WITH SWITCH

CABIN
DENMARK

The ultimate LED downlight for small and medium yachts.

- With internal touch switch
- Excellent warm white light
- Low power consumption
- Low heat
- Long life
- Small dimensions


Also ideal for replacement of halogen downlights with 55mm cut-out.

LED: 18
Light output: 170lm
Power consumption: 2W
Colour temp: 3000K
CRI> 80
Lightcone>120°
Lifetime>40.000h
Fixing: 2 springs
IP44

Internal driver for 12V DC (11-16V)

Internal driver for 24V DC (23-29V)

Dimensions	mm	in
A	70	2.75
B	2	0.08
C	18	0.70
D	55	2.17

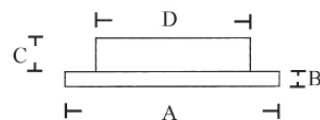

DOWNLIGHT 5581SSS

Model	Material	Finish	LED	Part. No.
5581SSS	Stainless/alu.	Highly finished	18x0,1W LED	5581SSS
5581SSS	Stainless/alu.	Highly finished	18x0,1W LED	5581SSS 24V

DOWNLIGHT 5581SS MASTER SWITCH

LED WITH MASTER SWITCH

CABIN
DENMARK


The ultimate LED downlight for small and medium yachts.

- With internal touch switch for switching and dimming of several lamps via remote PWM dimmer.
- Excellent warm white light
- Low power consumption
- Low heat
- Long life
- Small dimensions

LED: 18
Light output: 170lm
Power consumption: 2W
Colour temp: 3000K
CRI> 80
Lightcone>120°
Lifetime>40.000h
Fixing: 2 springs
IP44

Internal driver for 12V DC (11-16V)
Internal driver for 24V DC (23-29V)

Dimensions	mm	in
A	70	2.75
B	2	0.08
C	18	0.70
D	55	2.17



DOWNLIGHT 5581SSS

Model	Material	Finish	LED	Part. No.
5581SSMS	Stainless/aluminum	Highly finished	18x0,1W LED	5581SSMS
5581SSMS	Stainless/aluminum	Highly finished	18x0,1W LED	5581SSMS 24V

DOWNLIGHT 5581SS REWH

LED WITH NIGHT LIGHT

CABIN
DENMARK

The ultimate LED downlight for small and medium yachts.

- With night light function
- Excellent warm white light
- Low power consumption
- Low heat
- Long life
- Small dimensions


Also ideal for replacement of halogen downlights with 55mm cut-out.

LED: 18+8
Light output: 170lm
Power consumption: 2W white, 0,5W red
Colour temp: 3000K
CRI> 80
Lightcone>120°
Lifetime>40.000h
Fixing: 2 springs
IP65

Internal driver for 12V DC (11-16V)

Internal driver for 24V DC (23-29V)

Dimensions	mm	in
A	70	2.75
B	2	0.08
C	18	0.70
D	55	2.17

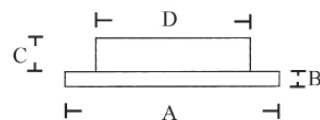

DOWNLIGHT 5581SS REWH

Model	Material	Finish	LED	Part. No.
5581SS REWH	Stainless/alu.	Highly finished	18+8x0,1W LED	5581SS REWH
5581SS REWH	Stainless/alu.	Highly finished	18+8x0,1W LED	5581SS REWH 24V

DOWNLIGHT 5581AL

LED

CABIN
DENMARK

The ultimate LED downlight for small and medium yachts.

- Excellent warm white light
- Low power consumption
- Low heat
- Long life
- Small dimensions
- Dimmable with PWM dimmer


Also ideal for replacement of halogen downlights with 55mm cut-out.

LED: 18
Light output: 170lm
Power consumption: 2W
Colour temp: 3000K
CRI> 80
Lightcone>120°
Lifetime>40.000h
Fixing: 2 springs
IP65

Internal driver for 12V DC (11-16V)

Internal driver for 24V DC (23-29V)

Dimensions	mm	in
A	70	2.75
B	2	0.08
C	18	0.70
D	55	2.17

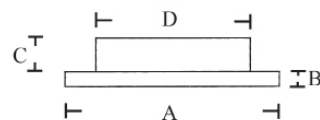

DOWNLIGHT 5581AL

Model	Material	Finish	LED	Part. No.
5581AL	Aluminium	Titan	18x0,1W LED	5581AL
5581AL	Aluminium	Titan	18x0,1W LED	5581AL 24V

DOWNLIGHT 5581AL SWITCH

LED WITH SWITCH

CABIN
DENMARK

The ultimate LED downlight for small and medium yachts.


- With internal touch switch
- Excellent warm white light
- Low power consumption
- Low heat
- Long life
- Small dimensions

Also ideal for replacement of halogen downlights with 55mm cut-out.

LED: 18
Light output: 170lm
Power consumption: 2W
Colour temp: 3000K
CRI> 80
Lightcone>120°
Lifetime>40.000h
Fixing: 2 springs
IP44

Internal driver for 12V DC (11-16V)
Internal driver for 24V DC (23-29V)

Dimensions	mm	in
A	70	2.75
B	2	0.08
C	18	0.70
D	55	2.17



DOWNLIGHT 5581ALS

Model	Material	Finish	LED	Part. No.
5581AL	Aluminium	Titan	18x0,1W LED	5581ALS
5581AL	Aluminium	Titan	18x0,1W LED	5581ALS 24V

DOWNLIGHT 5581AL REWH

LED WITH NIGHT LIGHT

CABIN
DENMARK

The ultimate LED downlight for small and medium yachts.


- With night light function
- Excellent warm white light
- Low power consumption
- Low heat
- Long life
- Small dimensions

Also ideal for replacement of halogen downlights with 55mm cut-out.

LED: 18+8
Light output: 170lm
Power consumption: 2W white, 0,5W red
Colour temp: 3000K
CRI> 80
Lightcone>120°
Lifetime>40.000h
Fixing: 2 springs
IP65

Internal driver for 12V DC (11-16V)
Internal driver for 24V DC (23-29V)

Dimensions	mm	in
A	70	2.75
B	2	0.08
C	18	0.70
D	55	2.17



DOWNLIGHT 5581AL REWH

Model	Material	Finish	LED	Part. No.
5581AL REWH	Aluminium	Titan	18+8x0,1W LED	5581AL REWH
5581AL REWH	Aluminium	Titan	18+8x0,1W LED	5581AL REWH 24V

DOWNLIGHT 5581WH

LED

CABIN
DENMARK

The ultimate LED downlight for small and medium yachts.


- Excellent warm white light
- Low power consumption
- Low heat
- Long life
- Small dimensions
- Dimmable with PWM dimmer

Also ideal for replacement of halogen downlights with 55mm cut-out.

LED: 18
Light output: 170lm
Power consumption: 2W
Colour temp: 3000K
CRI> 80
Lightcone>120°
Lifetime>40.000h
Fixing: 2 springs
IP65

Internal driver for 12V DC (11-16V)
Internal driver for 24V DC (23-29V)

Dimensions	mm	in
A	70	2.75
B	2	0.08
C	18	0.70
D	55	2.17

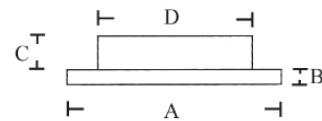

DOWNLIGHT 5581WH

Model	Material	Finish	LED	Part. No.
5581WH	Aluminium	White	18x0,1W LED	5581WH
5581WH	Aluminium	White	18x0,1W LED	5581WH 24V

DOWNLIGHT 5581WH SWITCH

LED WITH SWITCH

CABIN
DENMARK

The ultimate LED downlight for small and medium yachts.


- With internal touch switch
- Excellent warm white light
- Low power consumption
- Low heat
- Long life
- Small dimensions

Also ideal for replacement of halogen downlights with 55mm cut-out.

LED: 18
Light output: 170lm
Power consumption: 2W
Colour temp: 3000K
CRI> 80
Lightcone>120°
Lifetime>40.000h
Fixing: 2 springs
IP44

Internal driver for 12V DC (11-16V)
Internal driver for 24V DC (23-29V)

Dimensions	mm	in
A	70	2.75
B	2	0.08
C	18	0.70
D	55	2.17



DOWNLIGHT 5581WHS

Model	Material	Finish	LED	Part. No.
5581WHS	Aluminium	White	18x0,1W LED	5581WHS
5581WHS	Aluminium	White	18x0,1W LED	5581WHS 24V

DOWNLIGHT 5581WH MASTER SWITCH

LED WITH MASTER SWITCH

CABIN
DENMARK


The ultimate LED downlight for small and medium yachts.

- With internal touch switch for switching and dimming of several lamps via remote PWM dimmer.
- Excellent warm white light
- Low power consumption
- Low heat
- Long life
- Small dimensions

LED: 18
Light output: 170lm
Power consumption: 2W
Colour temp: 3000K
CRI> 80
Lightcone>120°
Lifetime>40.000h
Fixing: 2 springs
IP44

Internal driver for 12V DC (11-16V)
Internal driver for 24V DC (23-29V)

Dimensions	mm	in
A	70	2.75
B	2	0.08
C	18	0.70
D	55	2.17



DOWNLIGHT 5581WHMS

Model	Material	Finish	LED	Part. No.
5581WHMS	Aluminium	White	18x0,1W LED	5581WHMS
5581WHMS	Aluminium	White	18x0,1W LED	5581WHMS 24V

DOWNLIGHT 5581WH REWH

LED WITH NIGHT LIGHT

CABIN
DENMARK

The ultimate LED downlight for small and medium yachts.



- With night light function
- Excellent warm white light
- Low power consumption
- Low heat
- Long life
- Small dimensions

Also ideal for replacement of halogen downlights with 55mm cut-out.

LED: 18+8
Light output: 170lm
Power consumption: 2W white, 0,5W red
Colour temp: 3000K
CRI> 80
Lightcone>120°
Lifetime>40.000h
Fixing: 2 springs
IP65

Internal driver for 12V DC (11-16V)
Internal driver for 24V DC (23-29V)

Dimensions	mm	in
A	70	2.75
B	2	0.08
C	18	0.70
D	55	2.17

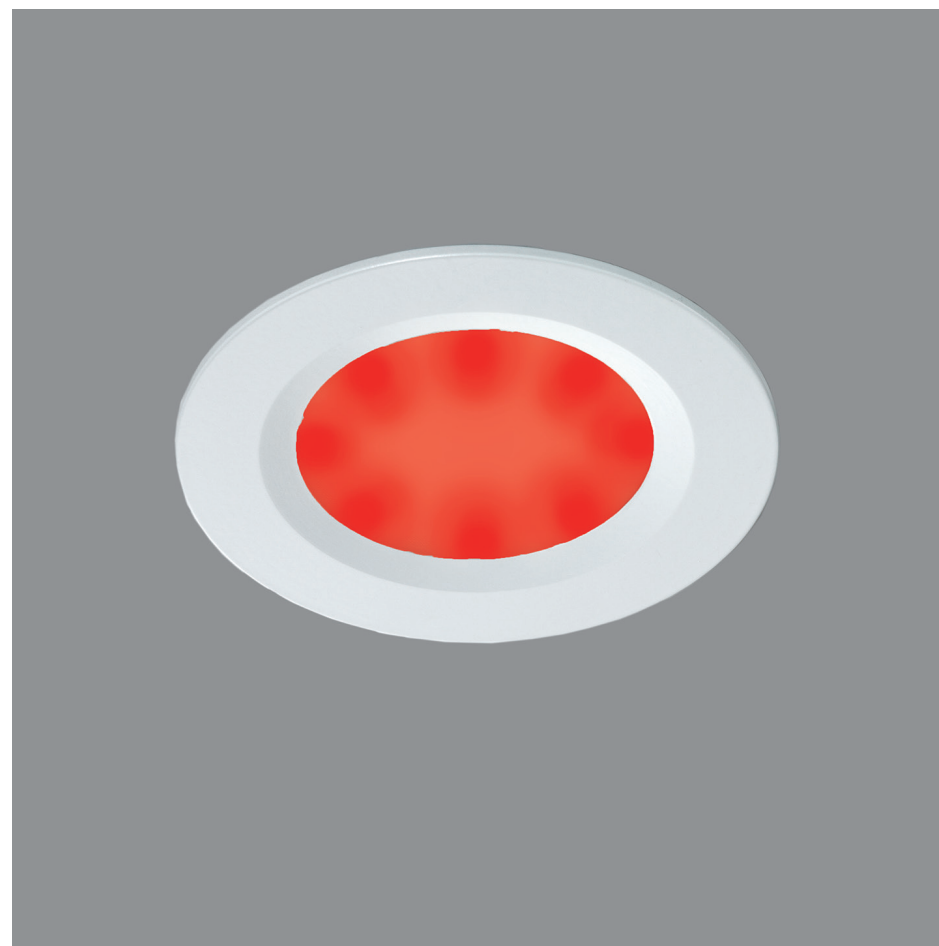

DOWNLIGHT 5581WH REWH

Model	Material	Finish	LED	Part. No.
5581WH REWH	Aluminium	White	18+8x0,1W LED	5581WH REWH
5581WH REWH	Aluminium	White	18+8x0,1W LED	5581WH REWH 24V

DOWNLIGHT 5581BLACK

LED

CABIN
DENMARK

The ultimate LED downlight for small and medium yachts.


- Excellent warm white light
- Low power consumption
- Low heat
- Long life
- Small dimensions
- Dimmable with PWM dimmer

Also ideal for replacement of halogen downlights with 55mm cut-out.

LED: 18
Light output: 170lm
Power consumption: 2W
Colour temp: 3000K
CRI> 80
Lightcone>120°
Lifetime>40.000h
Fixing: 2 springs
IP65

Internal driver for 12V DC (11-16V)

Dimensions	mm	in
A	70	2.75
B	2	0.08
C	18	0.70
D	55	2.17

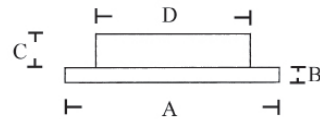

DOWNLIGHT 5581BLACK

Model	Material	Finish	LED	Part. No.
5581BLACK	Aluminium	BLACK	18x0,1W LED	5581BLACK

DOWNLIGHT 5581-02

LED SURFACEMOUNTED

CABIN
DENMARK


Surfacemounted LED downlight.

- Excellent warm white light
- Low power consumption
- Low heat
- Long life
- Small dimensions
- Dimmable with PWM dimmer

LED: 18
Light output: 170lm
Power consumption: 2W
Colour temp: 3000K
CRI> 80
Lightcone>120°
Lifetime>40.000h
Fixing: 2 screws
IP44

Internal driver for 12V DC (11-16V)
Internal driver for 24V DC (23-29V)

Dimensions	mm	in
A	70	2.75
B	14	0.60

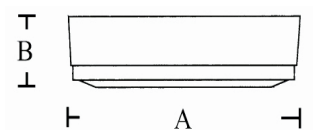

DOWNLIGHT 5581-02WH

Model	Material	Finish	LED	Part. No.
5581-02WH	Aluminium	White	18x0,1W LED	5581-02WH
5581-02WH 24V	Aluminium	White	18x0,1W LED	5581-02WH 24V

DOWNLIGHT 5583SS

LED

CABIN
DENMARK

The ultimate LED downlight for larger yachts.

- Excellent warm white light
- Low power consumption
- Low heat
- Long life
- Small dimensions
- Dimmable with PWM dimmer

LED: 30

Light output: 260lm

Power consumption: 3W

Colour temp: 3000k

CRI> 80

Lightcone>120°

Lifetime>40.000h


Fixing: 2 springs

IP65

Internal driver for 12V DC (11-16V)

Internal driver for 24V DC (23-29V)

Dimensions	mm	in
A	86	3.39
B	2.5	0.10
C	21	0.83
D	75	2.92

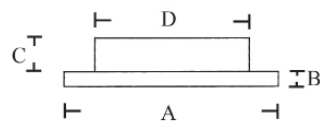

DOWNLIGHT 5583SS

Model	Material	Finish	LED	Part. No.
5583SS	Stainless/alu.	Highly finished	30x0,1W LED	5583SS
5583SS 24V	Stainless/alu.	Highly finished	30x0,1W LED	5583SS 24V

DOWNLIGHT 5583SS SWITCH

LED WITH SWITCH

CABIN
DENMARK


The ultimate LED downlight for larger yachts.

- With internal touch switch
- Excellent warm white light
- Low power consumption
- Low heat
- Long life
- Small dimensions
- Dimmable with PWM dimmer

LED: 30
Light output: 260lm
Power consumption: 3W
Colour temp: 3000k
CRI> 80
Lightcone>120°
Lifetime>40.000h
Fixing: 2 springs
IP44

Internal driver for 12V DC (11-16V)
Internal driver for 24V DC (23-29V)

Dimensions	mm	in
A	86	3.39
B	2.5	0.10
C	21	0.83
D	75	2.92



DOWNLIGHT 5583SS

Model	Material	Finish	LED	Part. No.
5583SSS	Stainless/al.	Highly finished	30x0,1W LED	5583SSS
5583SSS	Stainless/al.	Highly finished	30x0,1W LED	5583SSS 24V

DOWNLIGHT 5583SS REWH

LED WITH NIGHT LIGHT

CABIN
DENMARK


The ultimate LED downlight for larger yachts.

- With night light function
- Excellent warm white light
- Low power consumption
- Low heat
- Long life
- Small dimensions

LED: 30+8
Light output: 260lm
Power consumption: 3W white, 0,5W red
Colour temp: 3000K
CRI> 80
Lightcone>120°
Lifetime>40.000h
Fixing: 2 springs
IP65

Internal driver for 12V DC (11-16V)
Internal driver for 24V DC (23-29V)

Dimensions	mm	in
A	86	3.39
B	2.5	0.10
C	21	0.83
D	75	2.92

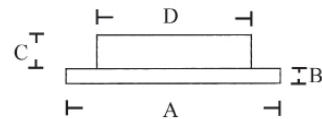

DOWNLIGHT 5583SS REWH

Model	Material	Finish	LED	Part. No.
5583 REWH	Stainless/alu.	Highly finished	30+8x0,1W LED	5583SS REWH
5583 REWH	Stainless/alu.	Highly finished	30+8x0,1W LED	5583SS REWH 24V

DOWNLIGHT 5583AL

LED

CABIN
DENMARK


The ultimate LED downlight for larger yachts.

- Excellent warm white light
- Low power consumption
- Low heat
- Long life
- Small dimensions
- Dimmable with PWM dimmer

LED: 30
Light output: 260lm
Power consumption: 3W
Colour temp: 3000k
CRI> 80
Lightcone>120°
Lifetime>40.000h
Fixing: 2 springs
IP65

Internal driver for 12V DC (11-16V)
Internal driver for 24V DC (23-29V)

Dimensions	mm	in
A	86	3.39
B	2.5	0.10
C	21	0.83
D	75	2.92

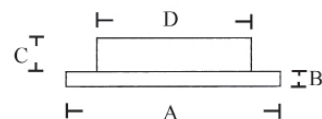

DOWNLIGHT 5583AL

Model	Material	Finish	LED	Part. No.
5583AL	Aluminium	Titan	30x0,1W LED	5583AL
5583AL 24V	Aluminium	Titan	30x0,1W LED	5583AL 24V

DOWNLIGHT 5583AL SWITCH

LED WITH SWITCH

CABIN
DENMARK


The ultimate LED downlight for larger yachts.

- With internal touch switch
- Excellent warm white light
- Low power consumption
- Low heat
- Long life
- Small dimensions

LED: 30
Light output: 260lm
Power consumption: 3W
Colour temp: 3000k
CRI> 80
Lightcone>120°
Lifetime>40.000h
Fixing: 2 springs
IP44

Internal driver for 12V DC (11-16V)
Internal driver for 24V DC (23-29V)

Dimensions	mm	in
A	86	3.39
B	2.5	0.10
C	21	0.83
D	75	2.92



DOWNLIGHT 5583ALS

Model	Material	Finish	LED	Part. No.
5583ALS	Aluminium	Titan	30x0,1W LED	5583ALS
5583ALS	Aluminium	Titan	30x0,1W LED	5583ALS 24V

DOWNLIGHT 5583AL REWH

LED WITH NIGHT LIGHT

CABIN
DENMARK



The ultimate LED downlight for larger yachts.

- With night light function
- Excellent warm white light
- Low power consumption
- Low heat
- Long life
- Small dimensions

LED: 30+8
Light output: 260lm
Power consumption: 3W white, 0,5W red
Colour temp: 3000K
CRI> 80
Lightcone>120°
Lifetime>40.000h
Fixing: 2 springs
IP65

Internal driver for 12V DC (11-16V)
Internal driver for 24V DC (23-29V)

Dimensions	mm	in
A	86	3.39
B	2.5	0.10
C	21	0.83
D	75	2.92

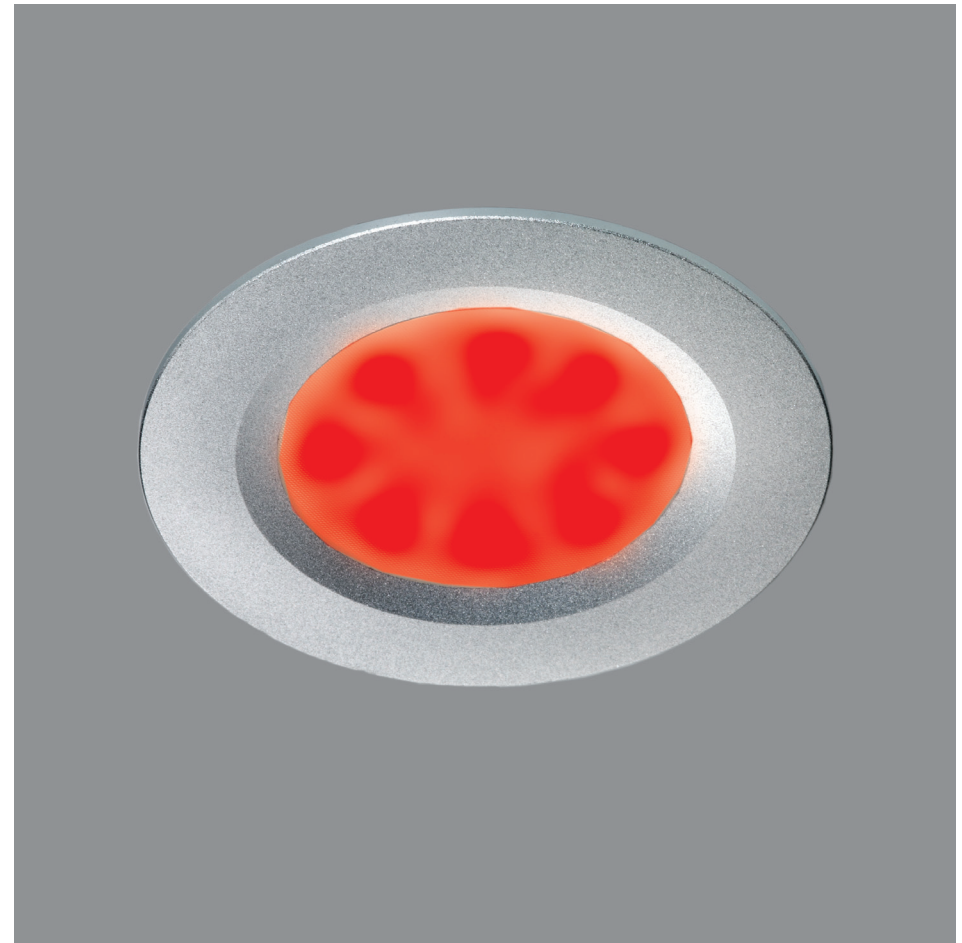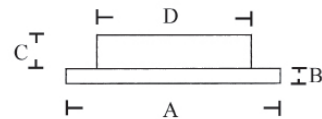

DOWNLIGHT 5583AL REWH

Model	Material	Finish	LED	Part. No.
5583AL REWH	Aluminium	Titan	30+8x0,1W LED	5581AL REWH
5583AL REWH	Aluminium	Titan	30+8x0,1W LED	5581AL REWH 24V

DOWNLIGHT 5583WH

LED

CABIN
DENMARK

The ultimate LED downlight for larger yachts.

- Excellent warm white light
- Low power consumption
- Low heat
- Long life
- Small dimensions
- Dimmable with PWM dimmer

LED: 30

Light output: 260lm

Power consumption: 3W

Colour temp: 3000k

CRI> 80

Lightcone>120°

Lifetime>40.000h


Fixing: 2 springs

IP65

Internal driver for 12V DC (11-16V)

Internal driver for 24V DC (23-29V)

Dimensions	mm	in
A	86	3.39
B	2.5	0.10
C	21	0.83
D	75	2.92

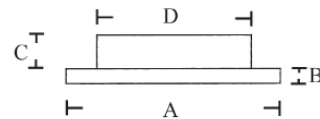

DOWNLIGHT 5583WH

Model	Material	Finish	LED	Part. No.
5583WH	Aluminium	White	30x0,1W LED	5583WH
5583WH	Aluminium	White	30x0,1W LED	5583WH 24V

DOWNLIGHT 5583WH SWITCH

LED WITH SWITCH

CABIN
DENMARK


The ultimate LED downlight for larger yachts.

- With internal touch switch
- Excellent warm white light
- Low power consumption
- Low heat
- Long life
- Small dimensions
- Dimmable with PWM dimmer

LED: 30
Light output: 260lm
Power consumption: 3W
Colour temp: 3000k
CRI> 80
Lightcone>120°
Lifetime>40.000h
Fixing: 2 springs
IP44

Internal driver for 12V DC (11-16V)
Internal driver for 24V DC (23-29V)

Dimensions	mm	in
A	86	3.39
B	2.5	0.10
C	21	0.83
D	75	2.92



DOWNLIGHT 5583WHS

Model	Material	Finish	LED	Part. No.
5583WHS	Aluminium	White	30x0,1W LED	5583WHS
5583WHS	Aluminium	White	30x0,1W LED	5583WHS 24V

DOWNLIGHT 5583WH REWH

LED WITH NIGHT LIGHT

CABIN
DENMARK



The ultimate LED downlight for larger yachts.

- With night light function
- Excellent warm white light
- Low power consumption
- Low heat
- Long life
- Small dimensions

LED: 30+8
Light output: 260lm
Power consumption: 3W white, 0,5W red
Colour temp: 3000K
CRI> 80
Lightcone>120°
Lifetime>40.000h
Fixing: 2 springs
IP65

Internal driver for 12V DC (11-16V)
Internal driver for 24V DC (23-29V)

Dimensions	mm	in
A	86	3.39
B	2.5	0.10
C	21	0.83
D	75	2.92

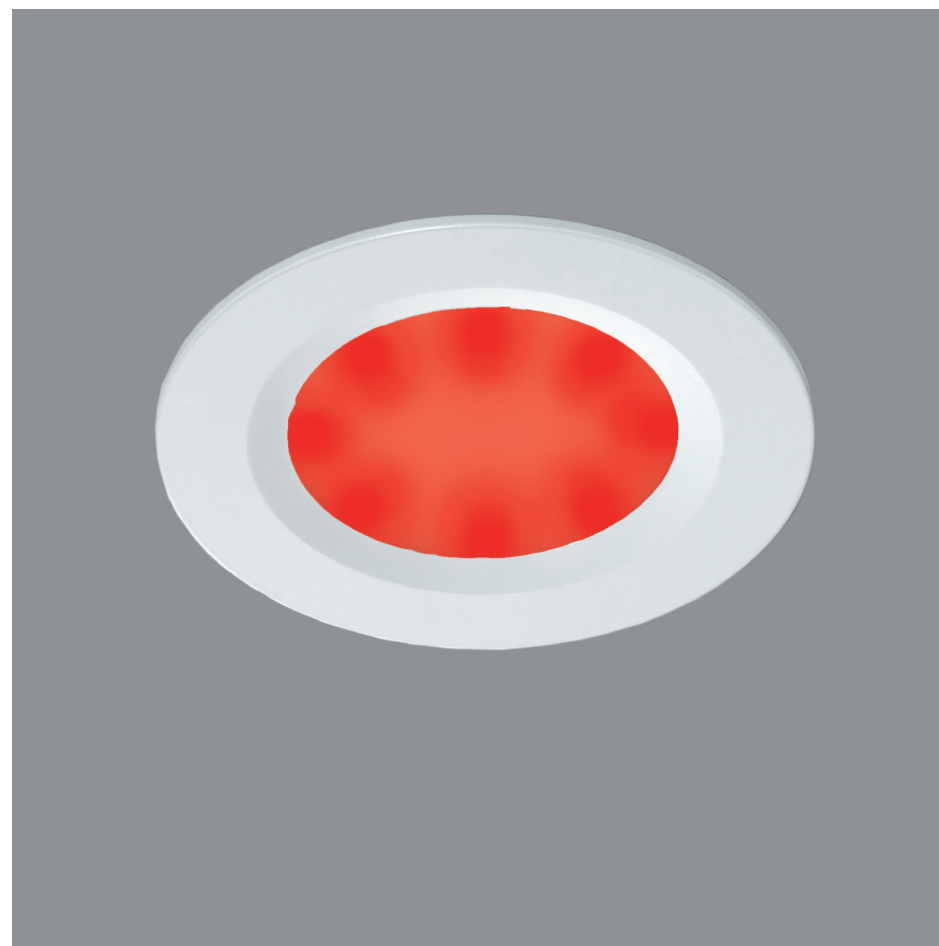

DOWNLIGHT 5583WH REWH

Model	Material	Finish	LED	Part. No.
5583 REWH	Aluminium	White	30+8x0,1W LED	5583WH REWH
5583 REWH	Aluminium	White	30+8x0,1W LED	5583WH REWH 24V

DOWNLIGHT 5586WH

LED

CABIN
DENMARK


The ultimate LED downlight for larger yachts and ships.

- Excellent warm white light
- Low power consumption
- Low heat
- Long life
- Small dimensions
- Dimmable with PWM dimmer

LED: 56
Light output: 520lm
Power consumption: 6W
Colour temp: 3000k
CRI> 85
Lightcone>120°
Lifetime>40.000h
Fixing: 2 springs
IP44

Internal driver for 24V DC (23-29V)

Dimensions	mm	in
A	100	3.98
B	2,5	0.10
C	52	2.05
D	90	3.54



DOWNLIGHT 5586WH 24V

Model	Material	Finish	LED	Part. No.
5586	Aluminium	White	56x0,1W LED	5586WH 24V

DIMMING LED LIGHTS

CABIN
DENMARK

CABIN LED lights are dimmable.

CABIN LED lights designed for a specific voltage range can be dimmed.
ea. lights series 5521 - 5581 - 5583 - 5586

Soft start, smooth dimming and memory function for high lighting comfort.
PWM technology with 750Hz - no flicker.

Our C-LED DIM must be connected between supply and LED light(s).
A push switch enable you to switch on and off and to dim your lights to the level you want.

C-LED DIM CV 6A for one channel max. 6A

C-LED DIM CV DIN 4X5A for one to four channels of max. 5A



C-LED DIM CV 6A




C-LED DIM CV DIN 4X5A

MODEL	CONTROL	V	A	Part. No.
C-LED DIM	PUSH	12V-24V	6	C-LED DIM CV 6A
C-LED DIM	PUSH	12V-24V	4x5	C-LED DIM CV DIN 4x5A

POWER LINE LED

CABIN
DENMARK

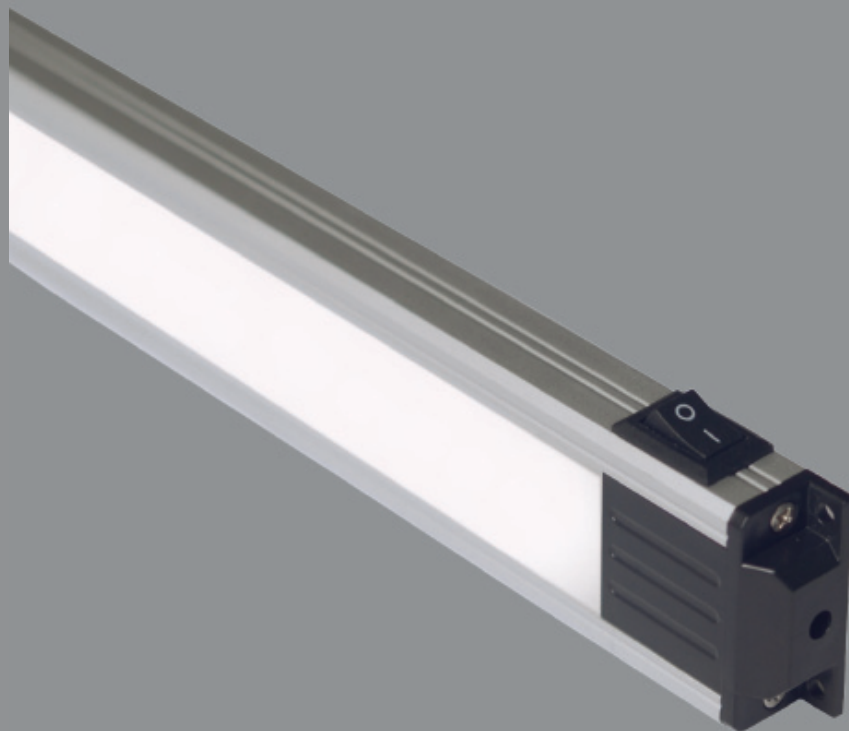

WORLD CLASS YACHT LIGHTS
SINCE 1977

POWER LINE LED

1070 SERIES

CABIN
DENMARK

This new series of LED lights is designed for general lighting, reading light or cabinet light. Quality light wherever you need it.

The 320mm light give the same warm white light as a 35W halogen bulb. An integrated LED driver regulates voltage fluctation and garanties steady light output.

Power consumption only 5W. The lifetime of the LEDs is more than 50.000h.

The lights are made of aluminum with acrylic lens/cover. The lights are surface mounted and need minimum space. Easy fixing with screws.

Dimension	Switch	Volt	Part. No.
320 x 30 x 12mm	yes	11-16V	1070WWS 320 12V
320 x 30 x 12mm	yes	23-29V	1070WWS 320 24V



LINE LED 1070WWS

POWER LINE LED

6020 SERIES

CABIN
DENMARK

This series of lights is designed for general lighting, reading light, cabinet light, mashine room light or light in sail lockers. Quality light wherever you need it.

24 LEDs give the same warm white light as a 20W halogen bulb.

An integrated LED driver regulates voltage fluctation and garanties steady light output.

Power consumption 12V - 2,5W, 24V - 3W. The lifetime of the LEDs is more than 50.000h.


The lights are made of aluminum and anodized, or anodized and white laquered.

IP 65 rating makes these lights ideal for indoor and outdoor use.

The lights are surface mounted and need minimum space. Fixing with two screws.

Dimension 300 x 13 x 8mm. No switch.

Material	Finish	Part. No. 12V	Part. No. 24V
Aluminum	White	6020WHWW 12V	6020WHWW 24V
Aluminum	Titan	6029WW 12V	6029WW 24V

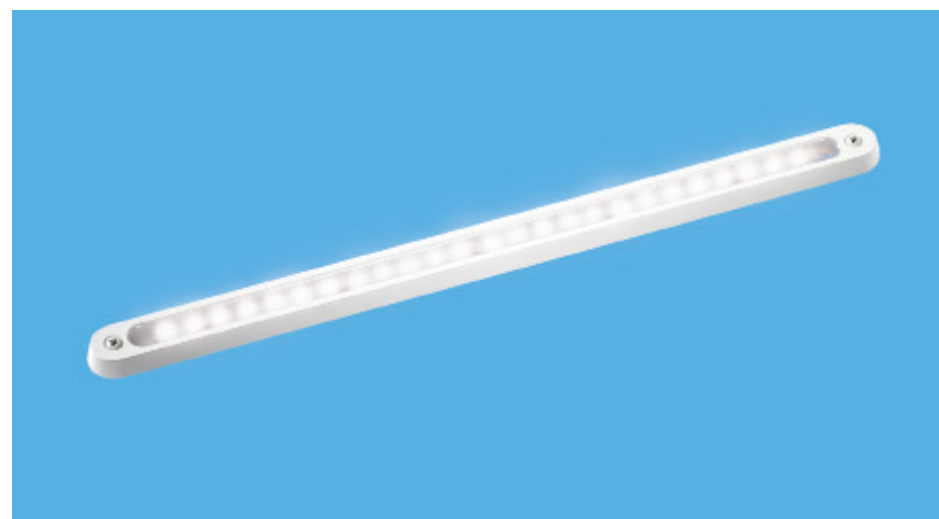

POWER LINE LED 6020WHWW

POWER LINE LED

6120 SERIES

CABIN
DENMARK

This series of lights is designed for general lighting, reading light, cabinet light, mashine room light or light in sail lockers. Quality light wherever you need it.

24 LEDs give the same warm white light as a 20W halogen bulb.

An integrated LED driver regulates voltage fluctation and garanties steady light output.

Power consumption 12V - 2,5W, 24V - 3W. The lifetime of the LEDs is more than 50.000h.


The lights are made of aluminum and anodized, or anodized and white laquered.

IP 65 rating makes these lights ideal for indoor and outdoor use.

The lights are surface mounted and need minimum space. Fixing with two screws.

Dimension 300 x 20 x 8mm. No switch.



Material	Finish	Part. No. 12V	Part. No. 24V
Aluminum	White	6120WHWW 12V	6120WHWW 24V
Aluminum	Titan	6129WW 12V	6129WW 24V

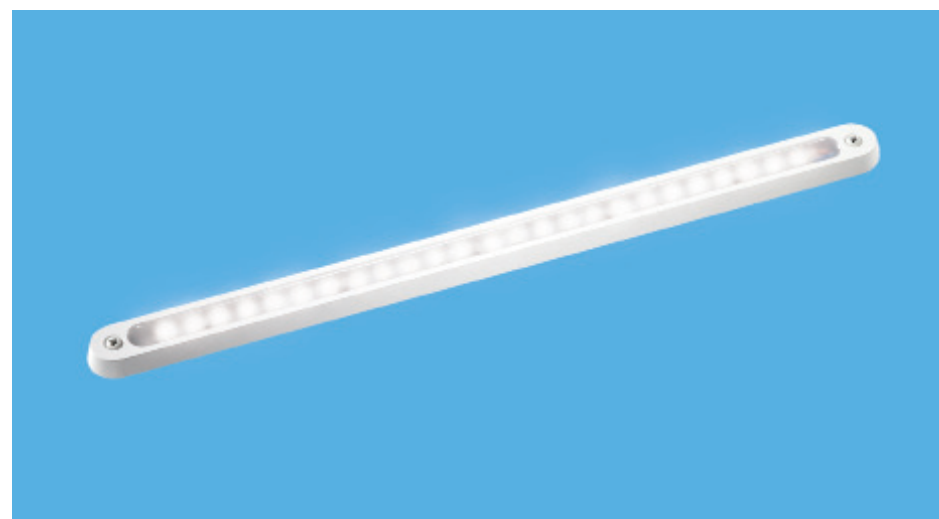

POWER LINE LED 6120WHWW

LED COURTESY LIGHT

CABIN
DENMARK

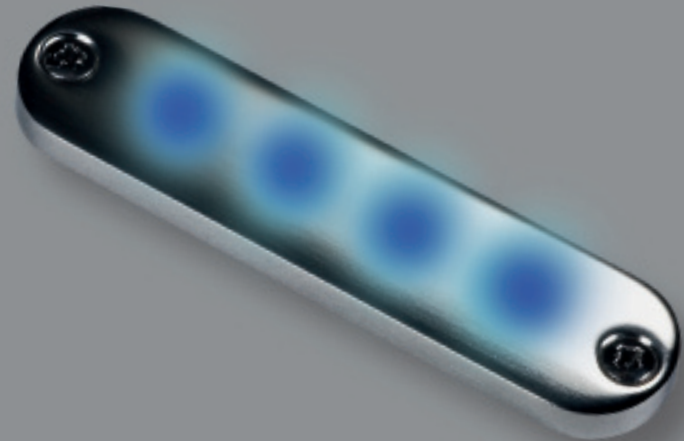

WORLD CLASS YACHT LIGHTS
SINCE 1977

LED 1000

CABIN
DENMARK


Surface mounted LED courtesy light made of white lacquered aluminum.

LED 1000 series illuminates from bottom.
IP 65 rating makes these lights ideal for indoor and outdoor use.


Power consumption is only 0,3W.
The lifetime of the LEDs is more than 50.000h.

An integrated LED driver regulates voltage fluctuation and guarantees steady light output.

Dimensions	mm	in
A	82	3.23
B	20	0.78
C	6	0.25



Material	Finish	LED	Volt	Part. No.
Aluminum	White lacquered	blue	12	1000WH BL IP65
Aluminum	White lacquered	red	12	1000WH RE IP65
Aluminum	White lacquered	white	12	1000WH WH IP65
Aluminum	White lacquered	blue	24	1000WH BL IP65 24V
Aluminum	White lacquered	red	24	1000WH RE IP65 24V
Aluminum	White lacquered	white	24	1000WH WH IP65 24V

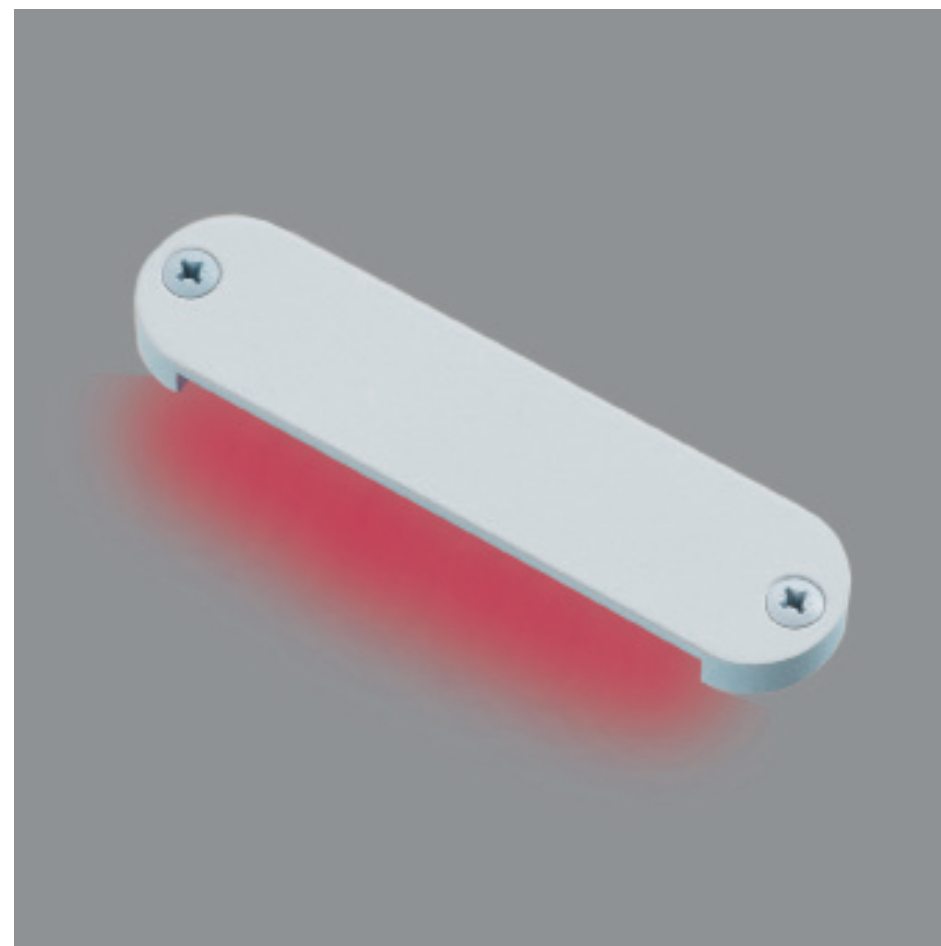

1000WHRE IP65

LED 1006

CABIN
DENMARK


Surface mounted LED courtesy light made of AISI 316 stainless steel.

LED 1000 series illuminates from bottom. IP 65 rating makes these lights ideal for indoor and outdoor use.

Power consumption is only 0,3W.
The lifetime of the LEDs is more than 50.000h.

An integrated LED driver regulates voltage fluctuation and guarantees steady light output.

Dimensions	mm	in
A	82	3.23
B	20	0.78
C	6	0.25



1006BL IP65



1006RE IP65



1006WH IP65

Material	Finish	LED	Volt	Part. No.
Stainless steel	highly finished	blue	12	1006BL IP65
Stainless steel	highly finished	red	12	1006RE IP65
Stainless steel	highly finished	white	12	1006WH IP65
Stainless steel	highly finished	blue	24	1006BL IP65 24V
Stainless steel	highly finished	red	24	1006RE IP65 24V
Stainless steel	highly finished	white	24	1006WH IP65 24V

LED 1008

CABIN
DENMARK


Surface mounted LED courtesy light made of black anodized aluminum.

LED 1000 series illuminates from bottom.
IP 65 rating makes these lights ideal for indoor and outdoor use.

Power consumption is only 0,3W.
The lifetime of the LEDs is more than 50.000h.

An integrated LED driver regulates voltage fluctuation and guarantees steady light output.

Dimensions	mm	in
A	82	3.23
B	20	0.78
C	6	0.25



Material	Finish	LED	Volt	Part. No.
Aluminum	black anodized	blue	12	1008BL IP65
Aluminum	black anodized	red	12	1008RE IP65
Aluminum	black anodized	white	12	1008WH IP65
Aluminum	black anodized	blue	24	1008BL IP65 24V
Aluminum	black anodized	red	24	1008RE IP65 24V
Aluminum	black anodized	white	24	1008WH IP65 24V



1008WH IP65

LED 1009

CABIN
DENMARK


Surface mounted LED courtesy light made of titan anodized aluminum.

LED 1009 series illuminates from bottom.
IP 65 rating makes these lights ideal for indoor and outdoor use.

Power consumption is only 0,3W.
The lifetime of the LED's is more than 50.000h.

An integrated LED driver regulates voltage fluctuation and guaranties steady light output.

Dimensions	mm	in
A	82	3.23
B	20	0.78
C	6	0.25



Material	Finish	LED	Volt	Part. No.
Aluminum	titan anodized	blue	12	1009BL IP65
Aluminum	titan anodized	red	12	1009RE IP65
Aluminum	titan anodized	white	12	1009WH IP65
Aluminum	titan anodized	blue	24	1009BL IP65 24V
Aluminum	titan anodized	red	24	1009RE IP65 24V
Aluminum	titan anodized	white	24	1009WH IP65 24V



1009WH IP65

LED 1010



CABIN
DENMARK

Surface mounted LED courtesy light made of white laquered aluminum.


LED 1010 series illuminates from 4 lenses.
IP 65 rating makes these lights ideal for indoor and outdoor use.

Power consumption is only 0,3W.
The lifetime of the LED's is more than 50.000h.

Dimensions	mm	in
A	82	3.23
B	20	0.78
C	5	0.20

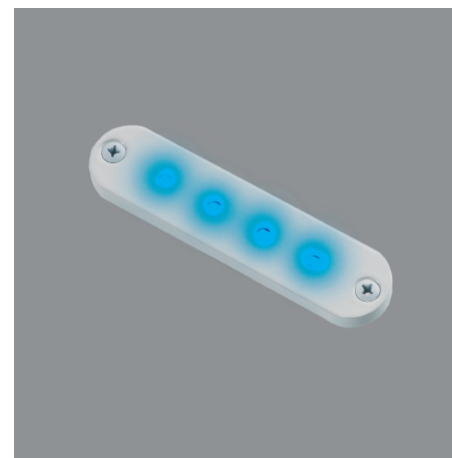


1010WH BL IP65

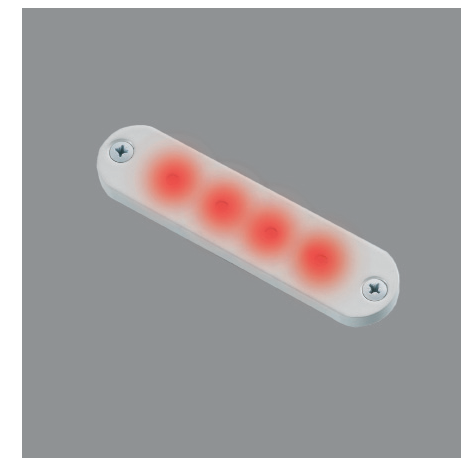

1010WH RE IP65



1009WH WH IP65

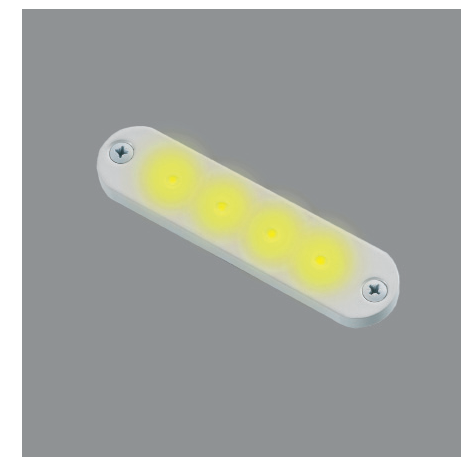

1010WH YE IP65

Material	Finish	LED	Volt	Part. No.
Aluminum	White lacquered	blue	12	1010WH BL IP65
Aluminum	White lacquered	red	12	1010WH RE IP65
Aluminum	White lacquered	white	12	1010WH WH IP65
Aluminum	White lacquered	yellow	12	1010WH YE IP65
Aluminum	White lacquered	blue	24	1010WH BL IP65 24V
Aluminum	White lacquered	red	24	1010WH RE IP65 24V
Aluminum	White lacquered	white	24	1010WH WH IP65 24V
Aluminum	White lacquered	yellow	24	1010WH YE IP65 24V

LED 1016

CABIN
DENMARK


Surface mounted LED courtesy light made of stainless steel.

LED 1016 series illuminates from 4 lenses.
IP 65 rating makes these lights ideal for indoor and outdoor use.

Power consumption is only 0,3W.
The lifetime of the LED's is more than 50.000h.

An integrated LED driver regulates voltage fluctuation and guaranties steady light output.

Dimensions	mm	in
A	82	3.23
B	20	0.78
C	5	0.20



Material	Finish	LED	Volt	Part. No.
Stainless steel	highly finished	blue	12	1016BL IP65
Stainless steel	highly finished	red	12	1016RE IP65
Stainless steel	highly finished	white	12	1016H IP65
Stainless steel	highly finished	yellow	12	1016YE IP65
Stainless steel	highly finished	blue	24	1016BL IP65 24V
Stainless steel	highly finished	red	24	1016RE IP65 24V
Stainless steel	highly finished	white	24	1016WH IP65 24V
Stainless steel	highly finished	yellow	24	1016YE IP65 24V



1016BL IP65

LED 1018

CABIN
DENMARK



Surface mounted LED courtesy light made of black anodized laquered aluminum.

LED 1010 series illuminates from 4 lenses.
IP 65 rating makes these lights ideal for indoor and outdoor use.


Power consumption is only 0,3W.
The lifetime of the LED's is more than 50.000h.

An integrated LED driver regulates voltage fluctuation and garanties steady light output.

Dimensions	mm	in
A	82	3.23
B	20	0.78
C	5	0.20

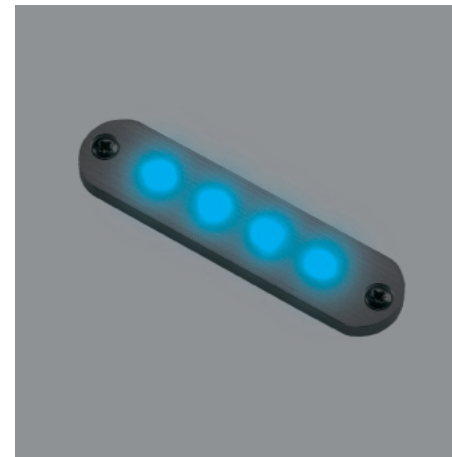


1018BL IP65

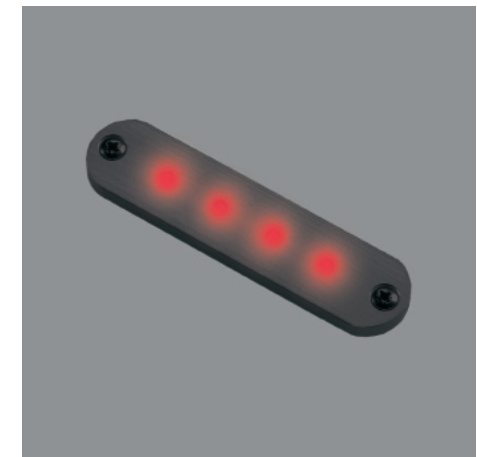

1018RE IP65



1018WH IP65

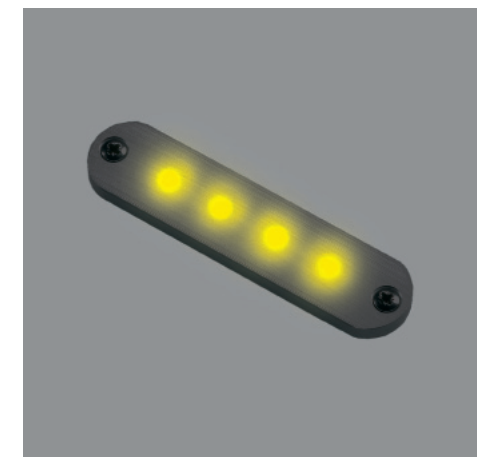

1018YE IP65

Material	Finish	LED	Volt	Part. No.
Aluminum	black anodized	blue	12	1018BL IP65
Aluminum	black anodized	red	12	1018RE IP65
Aluminum	black anodized	white	12	1018WH IP65
Aluminum	black anodized	yellow	12	1018YE IP65
Aluminum	black anodized	blue	24	1018BL IP65 24V
Aluminum	black anodized	red	24	1018RE IP65 24V
Aluminum	black anodized	white	24	1018WH IP65 24V
Aluminum	black anodized	yellow	24	1018YE IP65 24V

LED 1019

CABIN
DENMARK



Surface mounted LED courtesy light made of titan anodized aluminium.

LED 1010 series illuminates from 4 lenses.
IP 65 rating makes these lights ideal for indoor and outdoor use.


Power consumption is only 0,3W.
The lifetime of the LED's is more than 50.000h.

An integrated LED driver regulates voltage fluctuation and guaranties steady light output.

Dimensions	mm	in
A	82	3.23
B	20	0.78
C	5	0.20

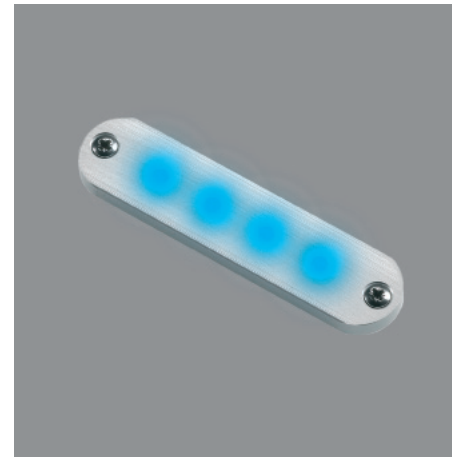


1019BL IP65

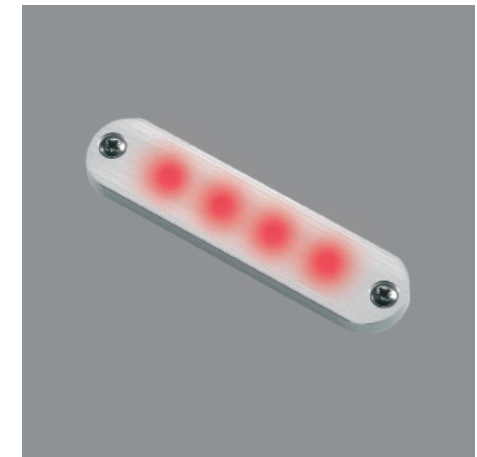

1019RE IP65



1019WH IP65

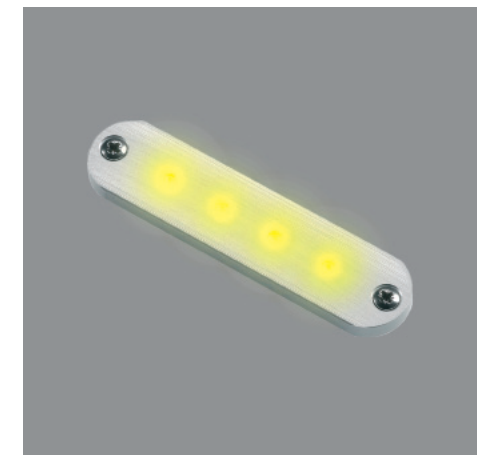

1019YE IP65

Material	Finish	LED	Volt	Part. No.
Aluminum	titan anodized	blue	12	1019BL IP65
Aluminum	titan anodized	red	12	1019RE IP65
Aluminum	titan anodized	white	12	1019WH IP65
Aluminum	titan anodized	yellow	12	1019YE IP65
Aluminum	titan anodized	blue	24	1019BL IP65 24V
Aluminum	titan anodized	red	24	1019RE IP65 24V
Aluminum	titan anodized	white	24	1019WH IP65 24V
Aluminum	titan anodized	yellow	24	1019YE IP65 24V

LED 1030-2

CABIN
DENMARK

Semi surface mounted LED light made of brass.

Very discrete step light and night light for classic yachts.


Illuminates from one opal defuser.
No visible LED dots.

Power consumption is only 0,3W.
The lifetime of the LED's is more than 50.000h.

An integrated LED driver regulates voltage fluctuation and guaranties steady light output.

* Custom made finish to fit your demand.

Dimensions	mm	in
A	90	3.55
B	25	0.99
C	5	0.20
D	20	0.78



Material	Finish	LED	Volt	Part. No.
Brass	Custom	blue	12V	1030-2*BL
Brass	Custom	red	12V	1030-2*RE
Brass	Custom	warm white	12V	1030-2*WW
Brass	Custom	yellow	12V	1030-2*YE
Brass	Custom	blue	24V	1030-2*BL 24V
Brass	Custom	red	24V	1030-2*RE 24V
Brass	Custom	warm white	24V	1030-2*WW 24V
Brass	Custom	yellow	24V	1030-2*YE 24V



1030-2CBL

LED 1036-2

CABIN
DENMARK

NEW

Semi surface mounted LED light made of stainless steel.

Very discrete step light and night light for classic yachts.


Illuminates from one opal defuser.
No visible LED dots.

Power consumption is only 0,3W.
The lifetime of the LED's is more than 50.000h.

An integrated LED driver regulates voltage fluctuation and guaranties steady light output.

* Custom made finish to fit your demand.

Dimensions	mm	in
A	90	3.55
B	25	0.99
C	5	0.20
D	20	0.78



1036-2BL

Material	Finish	LED	Volt	Part. No.
Stainless steel	Custom	blue	12V	1036-2*BL
Stainless steel	Custom	red	12V	1036-2*RE
Stainless steel	Custom	warm white	12V	1036-2*WW
Stainless steel	Custom	yellow	12V	1036-2*YE
Stainless steel	Custom	blue	24V	1036-2*BL 24V
Stainless steel	Custom	red	24V	1036-2*RE 24V
Stainless steel	Custom	warm white	24V	1036-2*WW 24V
Stainless steel	Custom	yellow	24V	1036-2*YE 24V

LED 1038

CABIN
DENMARK


Semi surface mounted LED courtesy light made of anodized aluminum.

LED 1038 series illuminates from one lens with a 30° light cone.
Ideal step light and night light for indoor use.

Power consumption is only 0,3W.
The lifetime of the LED's is more than 50.000h.

An integrated LED driver regulates voltage fluctation and garanties steady light output.

Dimensions	mm	in
A	90	3.55
B	25	0.99
C	5	0.20
D	12	0.45



Material	Finish	LED	Volt	Part. No.
Aluminum	Black anodized	blue	12V	1038BL
Aluminum	Black anodized	red	12V	1038RE
Aluminum	Black anodized	white	12V	1038WH
Aluminum	Black anodized	yellow	12V	1038YE
Aluminum	Black anodized	blue	24V	1038BL 24V
Aluminum	Black anodized	red	24V	1038RE 24V
Aluminum	Black anodized	white	24V	1038WH 24V
Aluminum	Black anodized	yellow	24V	1038YE 24V



1038RE

LED 1039

CABIN
DENMARK


Semi surface mounted LED courtesy light made of titan anodized aluminum.

LED 1039 series illuminates from one lens with a 30° light cone.
Ideal step light and night light for indoor use.

Power consumption is only 0,3W.
The lifetime of the LED's is more than 50.000h.

An integrated LED driver regulates voltage fluctation and garanties steady light output.

Dimensions	mm	in
A	90	3.55
B	25	0.99
C	5	0.20
D	12	0.45



Material	Finish	LED	Volt	Part. No.
Aluminum	Titan anodized	LED blue	12V	1039BL
Aluminum	Titan anodized	LED red	12V	1039RE
Aluminum	Titan anodized	LED white	12V	1039WH
Aluminum	Titan anodized	LED yellow	12V	1039YE
Aluminum	Titan anodized	LED blue	24V	1039BL 24V
Aluminum	Titan anodized	LED red	24V	1039RE 24V
Aluminum	Titan anodized	LED white	24V	1039WH 24V
Aluminum	Titan anodized	LED yellow	24V	1039YE 24V



1039BL

LED 1039-2

CABIN
DENMARK

Semi surface mounted LED light made of aluminum - titan anodized.

Very discrete step light and night light for classic yachts.


Illuminates from one opal defuser.
No visible LED dots.

Power consumption is only 0,5W.


The lifetime of the LED's is more than 50.000h.

An integrated LED driver regulates voltage fluctuation and guaranties steady light output.

Dimensions	mm	in
A	90	3.55
B	25	0.99
C	5	0.20
D	20	0.78



Material	Finish	LED	Volt	Part. No.
Aluminum	titan anodized	blue	12V	1039-2BL
Aluminum	titan anodized	red	12V	1039-2RE
Aluminum	titan anodized	warm white	12V	1039-2WW
Aluminum	titan anodized	yellow	12V	1039-2YE
Aluminum	titan anodized	blue	24V	1039-2BL 24V
Aluminum	titan anodized	red	24V	1039-2RE 24V
Aluminum	titan anodized	warm white	24V	1039-2WW 24V
Aluminum	titan anodized	yellow	24V	1039-2YE 24V

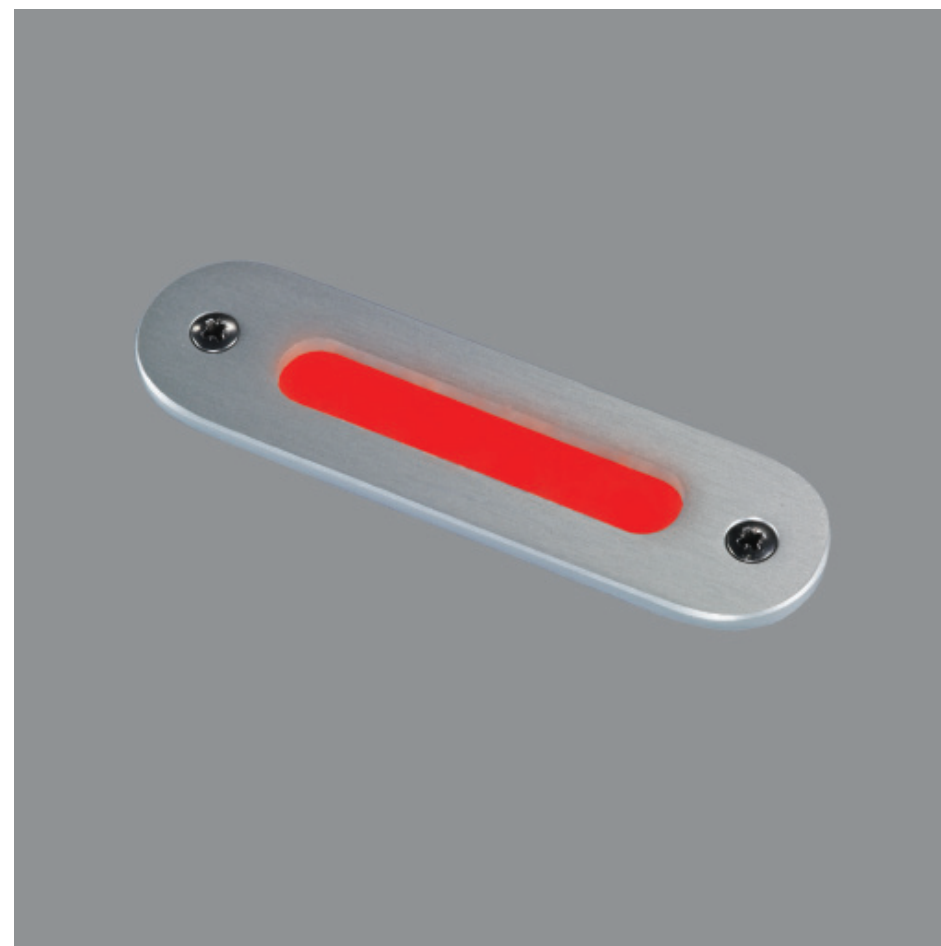

1039-2RE



X-YACHTS OF DENMARK
CURTESY LIGHT 1039-2RE
IN X-65

LED 1116

CABIN
DENMARK


Surface mounted LED courtesy light made of stainless steel.

LED 1016 series illuminates from 4 lenses.
IP 65 rating makes these lights ideal for indoor and outdoor use.

Power consumption is only 0,5W.
The lifetime of the LED's is more than 50.000h.

An integrated LED driver regulates voltage fluctuation and guaranties steady light output.

Dimensions	mm	in
A	82	3.23
B	20	0.78
C	5	0.20




Material	Finish	LED	Volt	Part. No.
Stainless steel	highly finished	blue	12	1116BL IP65
Stainless steel	highly finished	red	12	1116RE IP65
Stainless steel	highly finished	white	12	1116H IP65
Stainless steel	highly finished	yellow	12	1116YE IP65
Stainless steel	highly finished	blue	24	1116BL IP65 24V
Stainless steel	highly finished	red	24	1116RE IP65 24V
Stainless steel	highly finished	white	24	1116WH IP65 24V
Stainless steel	highly finished	yellow	24	1116YE IP65 24V



1116RE IP65

LED STRIPS NEON STRIPS

CABIN
DENMARK

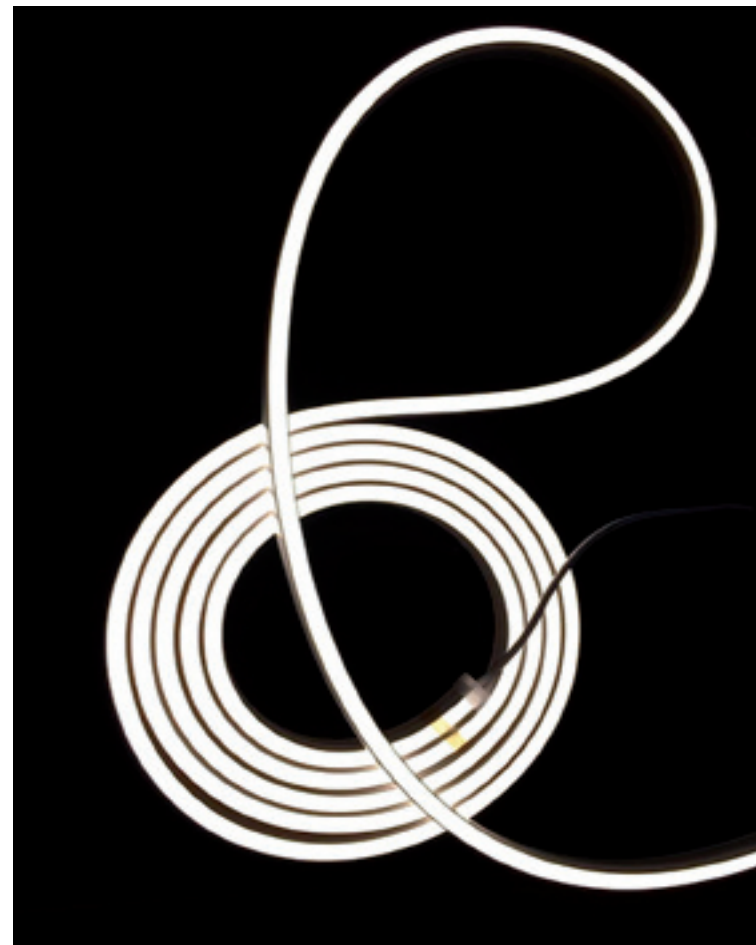

NEON STRIPS

CABIN
DENMARK

LED NEON strips open up new smart lighting options. No visible LED dots.

144 LEDs per m.
500lm per m.


Low power consumption and heat.
Integrated LED driver regulate voltage fluctation and garanties steady light output.
Lifetime of the LED's is more than 50.000h.

5m standard length.
Cutting per 25mm 12V, 50mm 24V

Custom length on request.
Max length 15m.

IP66

Design	Volt	Watt	Kelvin	RA	Part. No.
N-SERIES	12V	10W	2700k	>90	N 4X10 10W 12V 27K
N-SERIES	24V	10W	2700k	>90	N 4X10 10W 24V 27K

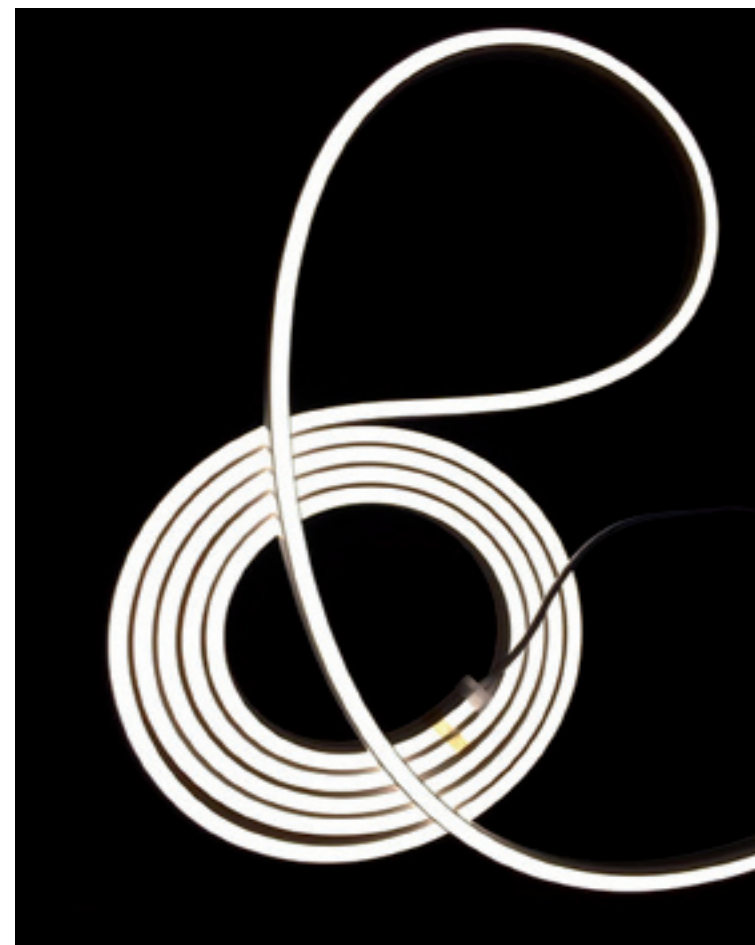

LED STRIPS

MARINE GRADE

S-SERIES

CABIN
DENMARK

Marine Grade LED strips.
For accent and background lighting,
or lighting in cabinets and the like.

60LEDs per meter.
375lm per meter.

An integrated LED driver regulates voltage
fluctuations and guarantees constant
light output.

Silicon protection to IP65.
3M tape on back.
Low power consumption and low heat.


Lifetime of the LED's is more than 50.000h
5m standard length.
Cutting per 50mm 12V, 100mm 24V

Design	Volt	Watt	Kelvin	RA	Part. No.
S-SERIES	12V	5W	2700k	>90	S 10 5W 12V 27K IP65
S-SERIES	24V	5W	2700k	>90	S 10 5W 24V 27K IP65
Custom length available from stock:					
2,5m	12V	5W	2700k	>90	S 10 5W 12V 27K IP65 2,5



SPREADER LED
MAST / DECK LED
BOOM LED
BIMINI LED

CABIN
DENMARK

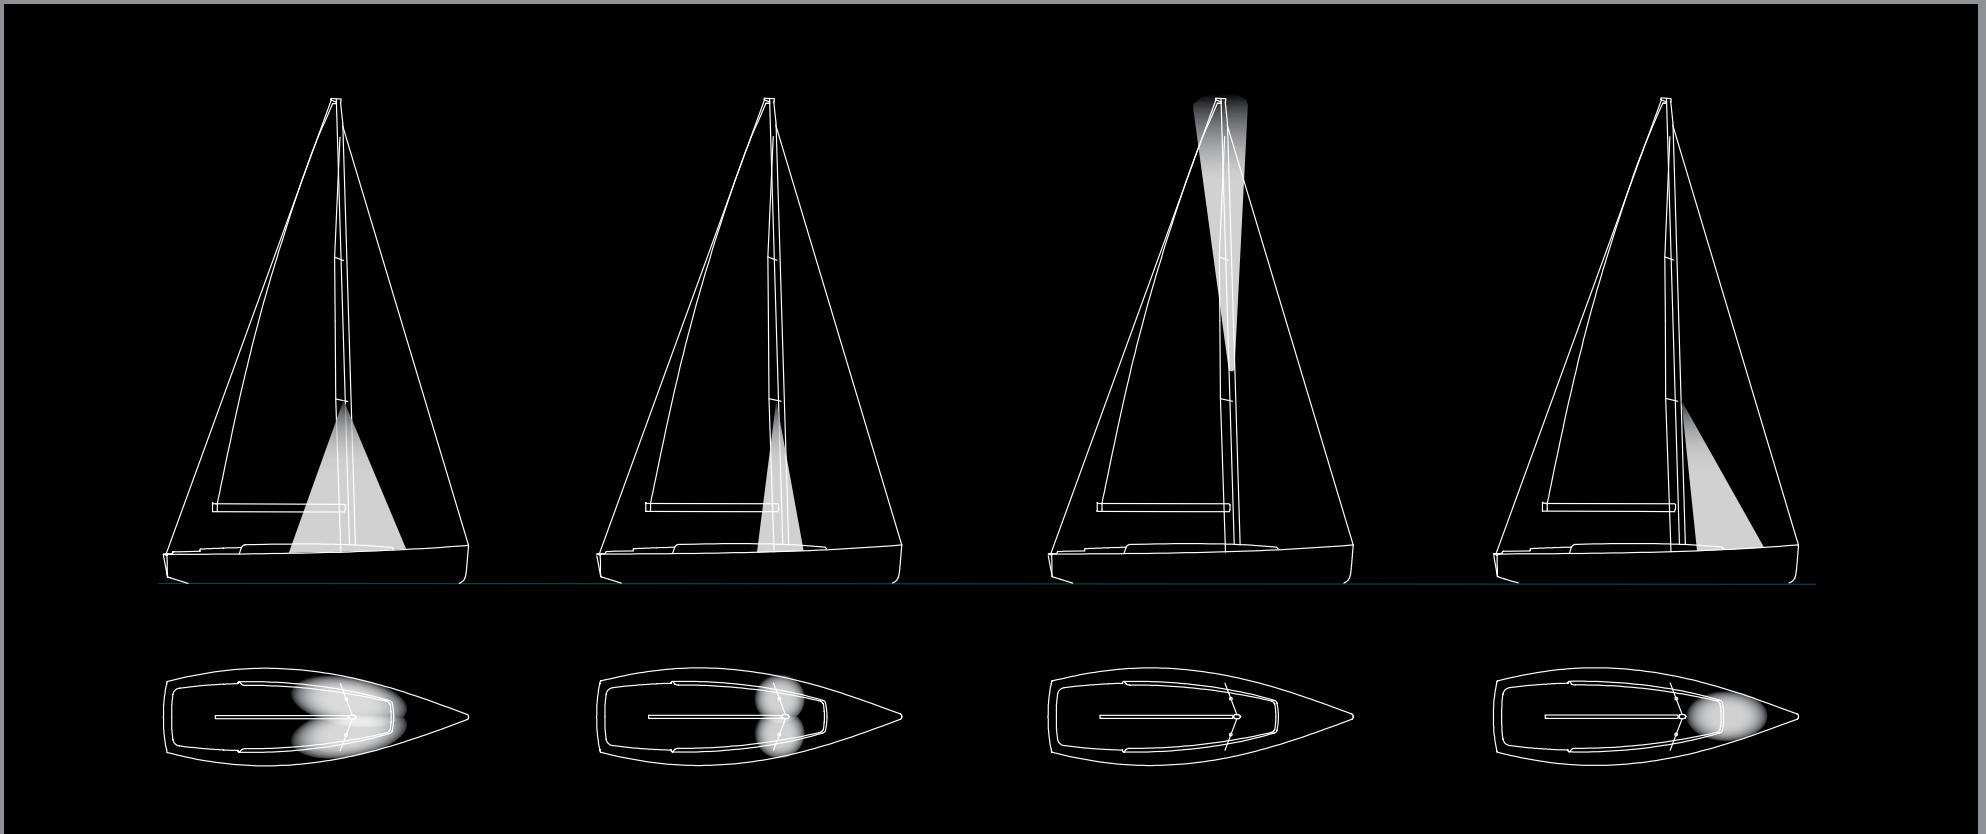

WORLD CLASS YACHT LIGHTS
SINCE 1977

SPREADER LED

6400 SERIES

CABIN
DENMARK

XL

The most powerfull Spreader LED Light
in our programme.

Circle housing of turned aluminum to fit
under spreaders. Black anodized surface.
Dimensions: Ø44 x 30mm
Fixing: M5 screws AISI 316
2400mm PU cable Ø 5mm, 2x0,34mm
Recommended connector IP68 - see page 11.11
IP67

Internal driver for 24V DC, 10W
Four super powerful LEDs illuminate the deck
even from 10 - 12m height.
Light output >800Lm, >12.000 Candela.
Colour temperature: 4000k, CRI >85
Ligth cone 16°
Lit up area Ø5m with light 10m over deck

Dimmable with PWM dimmer - see page 11.12

Material	Finish	LED	Part. No.
Aluminum	Black	4x2,5W	6408-02 16 24V



SPREADER LED XL 6408-02 16 24V

SPREADER LED


6500 SERIES

CABIN
DENMARK

Spreader lights for larger yachts.
The powerful LEDs illuminate with a very low power consumption.

Made of turned aluminum to fit R160 - R200 spreader profile.
Anodized or white lacquered surface.
Fixing: M5 screws AISI 316
2000mm PU cable Ø 5mm, 2x0,34mm
Recommended connector IP68 - see page 11.11
IP 67

Internal driver for 12V - 24V DC, 3,6W
Light output >400Lm, >6.000 Candela
Colour temperature 4000k, CRI >85
Ligh cone 16° lit up area Ø 2m
Port/Starb 16 x 43° lit up area 2 x 5m
Please see page 11.13 and 11.14
Dimmable with PWM dimmer - see page 11.12

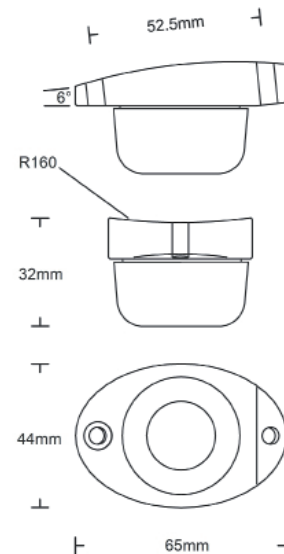

SPREADER LED 6508-02

Material	Finish	LED	Part. No.
Aluminum	White	3x1,2W	6500-02WH 16
Aluminum	White	3x1,2W	6500-02WH PORT
Aluminum	White	3x1,2W	6500-02WH STARB
Aluminum	Black	3x1,2W	6508-02 16
Aluminum	Black	3x1,2W	6508-02 PORT
Aluminum	Black	3x1,2W	6508-02 STARB
Aluminum	Titan	3x1,2W	6509-02 16
Aluminum	Titan	3x1,2W	6509-02 PORT
Aluminum	Titan	3x1,2W	6509-02 STARB

SPREADER LED

6500 SERIES BLUE light


CABIN
DENMARK

BLUE light

Spreader lights for larger yachts.
Up-light - mounting in top of the spreader.

Made of turned aluminum to fit R160 - R200
spreader profile.
Anodized or white lacquered surface.
Fixing: M5 screws AISI 316
2000mm PU cable Ø 5mm, 2x0,34mm
Recommended connector IP68 - see page 11.11
IP67

Internal driver for 12V - 24V DC, 3,6W
Light output >400Lm >6.000 Candela
Ligh cone 16°
Please see page 11.13 and 11.14
Dimmable with PWM dimmer - see page 11.12

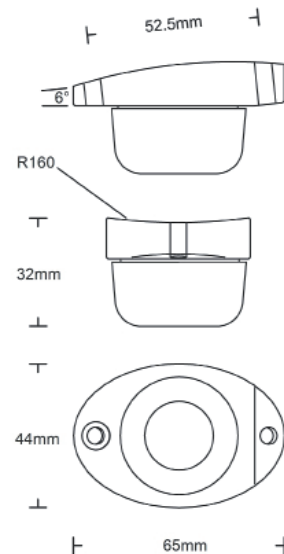

SPREADER LED 6508-02 BL

Material	Finish	LED	Part. No.
Aluminum	White	3x1,2W	6500-02WH 16 BL
Aluminum	Black	3x1,2W	6508-02 16 BL
Aluminum	Titan	3x1,2W	6509-02 16 BL

SPREADER LED


6510 SERIES

CABIN
DENMARK

Spreader lights for larger yachts.
The powerful LEDs illuminate with a very low power consumption

Made of turned aluminum to fit R500 spreader profile.
Black anodized surface.
Fixing: M5 screws AISI 316
2400mm PU cable Ø 5mm, 2x0,34mm
Recommended connector IP68 - see page 11.11
IP67

Internal driver for 12V - 24V DC, 3,6W
Light output >400Lm >6.000 Candela
Colour temperature: 4000k, CRI >85
Ligh cone 16° lit up area Ø 2m
See also page 10.13 and 11.14
Dimmable with PWM dimmer - see page 11.12

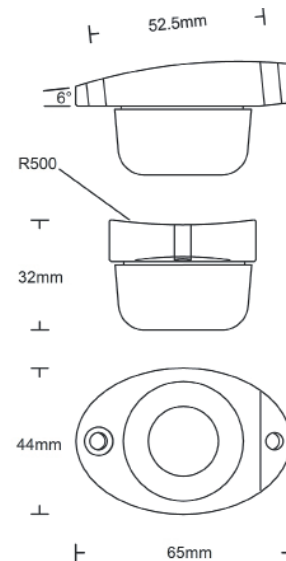

SPREADER LED 6518-02

Material	Finish	LED	Part. No.
Aluminum	Black	3x1,2W	6518-02 16

SPREADER LED

6600 SERIES

CABIN
DENMARK

Spreader lights for larger yachts.
The powerful LEDs illuminate with a very low power consumption

Circle housing of turned aluminum to fit under flat spreaders. Anodized or white lacquered surface.

Fixing: M5 screws AISI 316

2000mm PU cable Ø 5mm, 2x0,34mm

Recommended connector IP68 - see page 10
IP67

Internal driver for 12V - 24V DC, 3,6W

Light output >400Lm >6.000 Candela


Colour temperature: 4000k, CRI >85

Light cone 16° lit up area Ø 2m

Light cone 16 x 43° lit up area 2 x 5m

See also page 11.13 and 11.14

Dimmable with PWM dimmer - se page 11.12

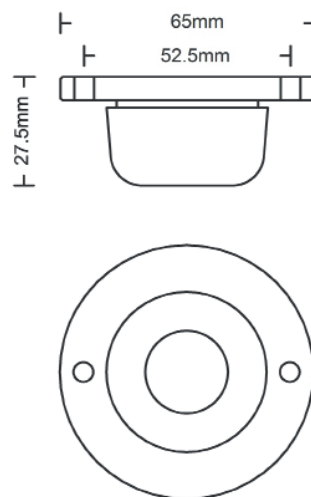

Material	Finish	LED	Part. No.
Aluminum	White	3x1,2W	6600-02WH 16
Aluminum	White	3x1,2W	6600-02WH 16x43
Aluminum	Black	3x1,2W	6608-02 16
Aluminum	Black	3x1,2W	6608-02 16x43
Aluminum	Titan	3x1,2W	6609-02 16
Aluminum	Titan	3x1,2W	6609-02 16x43



SPREADER LED 6608-02

MAST / DECK LED

6800 SERIES

CABIN
DENMARK


LED mast light for small and medium yachts.
The powerfull LEDs illuminate with a
minimum of power consumption.

The light is made of turned aluminum and
the surface is black anodized or white
lacquered. With aluminium bracket.
Dimensions: Ø44 x 30mm

Fixing: M5 screws AISI 316
7500mm PU cable Ø 5mm, 2x0,34mm
Recommended connector IP68 - see page 11.11
IP 67

Internal driver for 12V - 24V DC, 3,6W
Light output >400Lm, >6.000 Candela
Colour temperature 4000k, CRI >85
Ligth cone 16° lit up area 2 x 3m
Please see page 11.14
Dimmable with PWM dimmer - see page 11.12

Model	Material	Finish	LED	Part. No.
MAST/DECK LED	Aluminum	White	3x1,2W	6800-02WH 16
MAST/DECK LED	Aluminum	Black	3x1,2W	6808-02 16

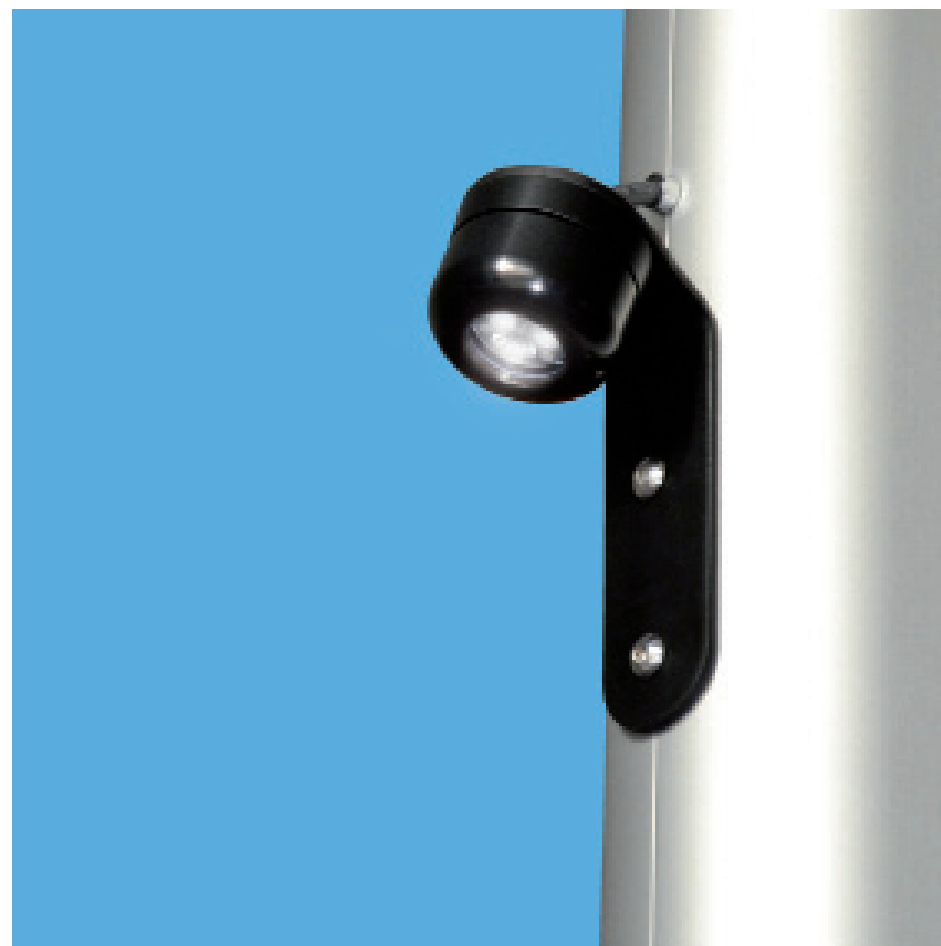

MAST LED 6808-02 16

MAST LED

6900 SERIES

CABIN
DENMARK

LED mast light for larger yachts.
The powerfull LEDs illuminate with a
minimum of power consumption.

The lights are made of turned aluminum.
The surface is anodized or white lacquered.
Dimensions: Ø90 x 40mm

Fixing: M5 screws AISI 316
1500mm PU cable Ø 5mm, 2x0,34mm
Recommended connector IP68 - see page 11.11
IP 67

Internal driver for 12V - 24V DC, 3,6W
Light output >400Lm, >6.000 Candela
Colour temperature 4000k, CRI >85
Ligth cone 16° lit up area 3 x 5m
Please see page 11.14
Dimmable with PWM dimmer - see page 11.12

Mast bracket 6900MB (AISI 316) to be
ordered separately.

Model	Material	Finish	LED	Part. No.
MAST LED	Aluminum	White	3x1,2W	6900-02WH
MAST LED	Aluminum	Black	3x1,2W	6908-02
MAST LED	Aluminum	Titan	3x1,2W	6909-02



MAST LED 6908-02

BOOM LED

6000 SERIES

CABIN
DENMARK

This series of lights is designed to give cockpit light from the boom.

24 LEDs give the same warm white light as a 20W halogen bulb. An integrated LED driver regulates voltage fluctuation and guaranties steady light output.

Power consumption 12V - 2,5W, 24V - 3W.

Dimmable with PWM dimmer - see page 11.12

The lights are made of aluminum. The surface is anodized or white lacquered.

The lights are surface mounted and fit into the gap in smaller booms.

Dimension 300 x 13 x 8mm.

Fixing: M4 screws AISI 316 or rivets.

6000mm PU cable Ø5mm, 2 x 0,34mm

Recommended connector IP68 - see page 11.11

IP 65

Material	Finish	Part. No. 12V	Part. No. 24V
Aluminum	White	6030WHWW 12V	6030WHWW 24V
Aluminum	Titan	6039WW 12V	6039WW 24V



BOOM LED 6039WW

BOOM LED

6100 SERIES

CABIN
DENMARK

This series of lights is designed to give cockpit light from the boom.

24 LEDs give the same warm white light as a 20W halogen bulb. An integrated LED driver regulates voltage fluctuation and guaranties steady light output.

Power consumption 12V - 2,5W, 24V - 3W.

Dimmable with PWM dimmer - see page 11.12

The lights are made of aluminum. The surface is anodized or white lacquered.

The lights are surface mounted and fit into the gap in booms.

Dimension 300 x 20 x 8mm.

Fixing: M4 screws AISI 316 or rivets.

6000mm PU cable Ø5mm, 2 x 0,34mm

Recommended connector IP68 - see page 11.11

IP 65

Material	Finish	Part. No. 12V	Part. No. 24V
Aluminum	White	6130HWW 12V	6130HWW 24V
Aluminum	Titan	6139WW 12V	6139WW 24V



BOOM LED 6139WW

BIMINI LED

6200 SERIES

CABIN
DENMARK

This series of lights is designed to give cockpit light under the bimini.

20 LEDs give the same warm white light as a 20W halogen bulb. An integrated LED driver regulates voltage fluctuation and guaranties steady light output.

Power consumption 12V - 2,5W, 24V - 3W.
Dimmable with PWM dimmer - see page 11.12

The lights are made of anodized aluminum.
Curved back fit tubes of 25-30mm diameter.

Dimension 250 x 20 x 10mm.

Fixing: M4 screws AISI 316.

6000mm PU cable Ø5mm, 2 x 0,34mm.

Recommended connector IP68 - see page 11.11
IP 65



BIMINI LED 6239WW

Material	Finish	Part. No. 12V	Part. No. 24V
Aluminum	Titan	6239WW 12V	6239WW 24V

IP 68 CONNECTORS

CABIN
DENMARK

NEW

For long safe and maintenance free service life
the cable connection must be water tight.


We strongly recommend our new IP68 connector C-LED CON.

All CABIN SPREADER LED LIGHTS,
MAST LED LIGHTS, BOOM LED LIGHTS
and BIMINI LED LIGHTS
can be connected to your yacht's power system via C-LED CON.



MODEL
C-LED CON

Part. No.
C-LED CON

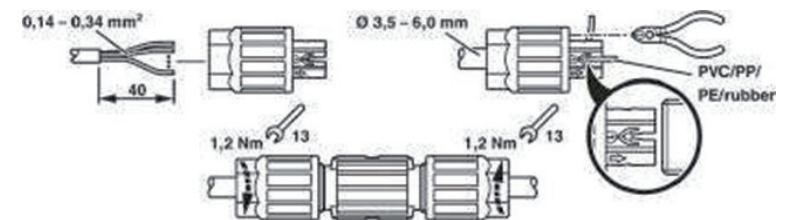

C-LED CON

DIMMING LED LIGHTS

NEW

CABIN SPREADER LED lights 6500 and 6600 series, MAST LED LIGHTS, BOOM LED LIGHTS and BIMINI LED lights are dimmable.

- 2 or 4 SPREADER LED LIGHTS 6400
- 2, 4 or 6 SPREADER LED LIGHTS 6500, 6600
- 1 - 4 MAST/DECK LED LIGHTS,
- 1 - 8 BOOM LED LIGHTS,
- 1 - 8 BIMINI LED LIGHTS,

Soft start, smooth dimming and memmory function for high lighting comfort.

The dimmer (PWM technology) must be connected between the power supply and the LED light(s). A push switch enable you to dim the light to the level you want.

- C-LED DIM CV 6A for one channel max. 6A
- C-LED DIM CV DIN 4X5A for one to four channels of max. 5A



C-LED DIM CV 6A




C-LED DIM CV DIN 4X5A

MODEL	CONTROL	V	A	Part. No.
C-LED DIM	PUSH	12V-24V	6	C-LED DIM CV 6A
C-LED DIM	PUSH	12V-24V	4x5	C-LED DIM CV DIN 4x5A

MOUNTING



CABIN
DENMARK

SPREADER LED 6500 SERIES

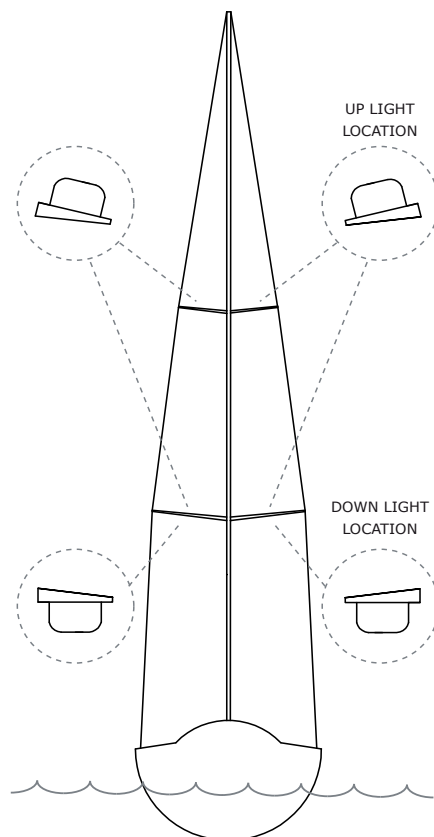

CABIN
DENMARK


DETAIL/SECTION

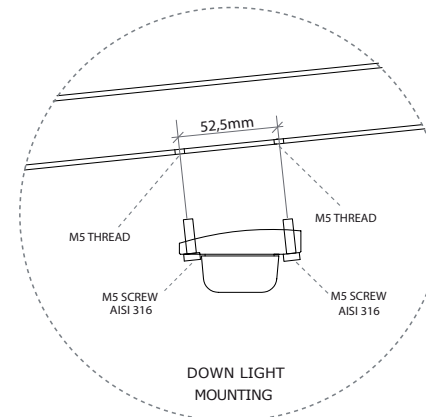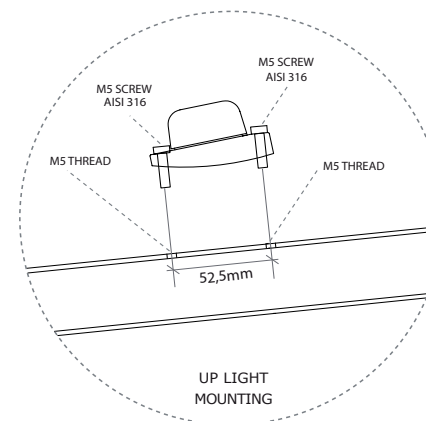

IMPORTANT
The electrical connection must be protected against ingress of water.
We recommend using our C-LED CON, see photo.

SPREADER LED - MAST LED - BOOM LED

CABIN
DENMARK

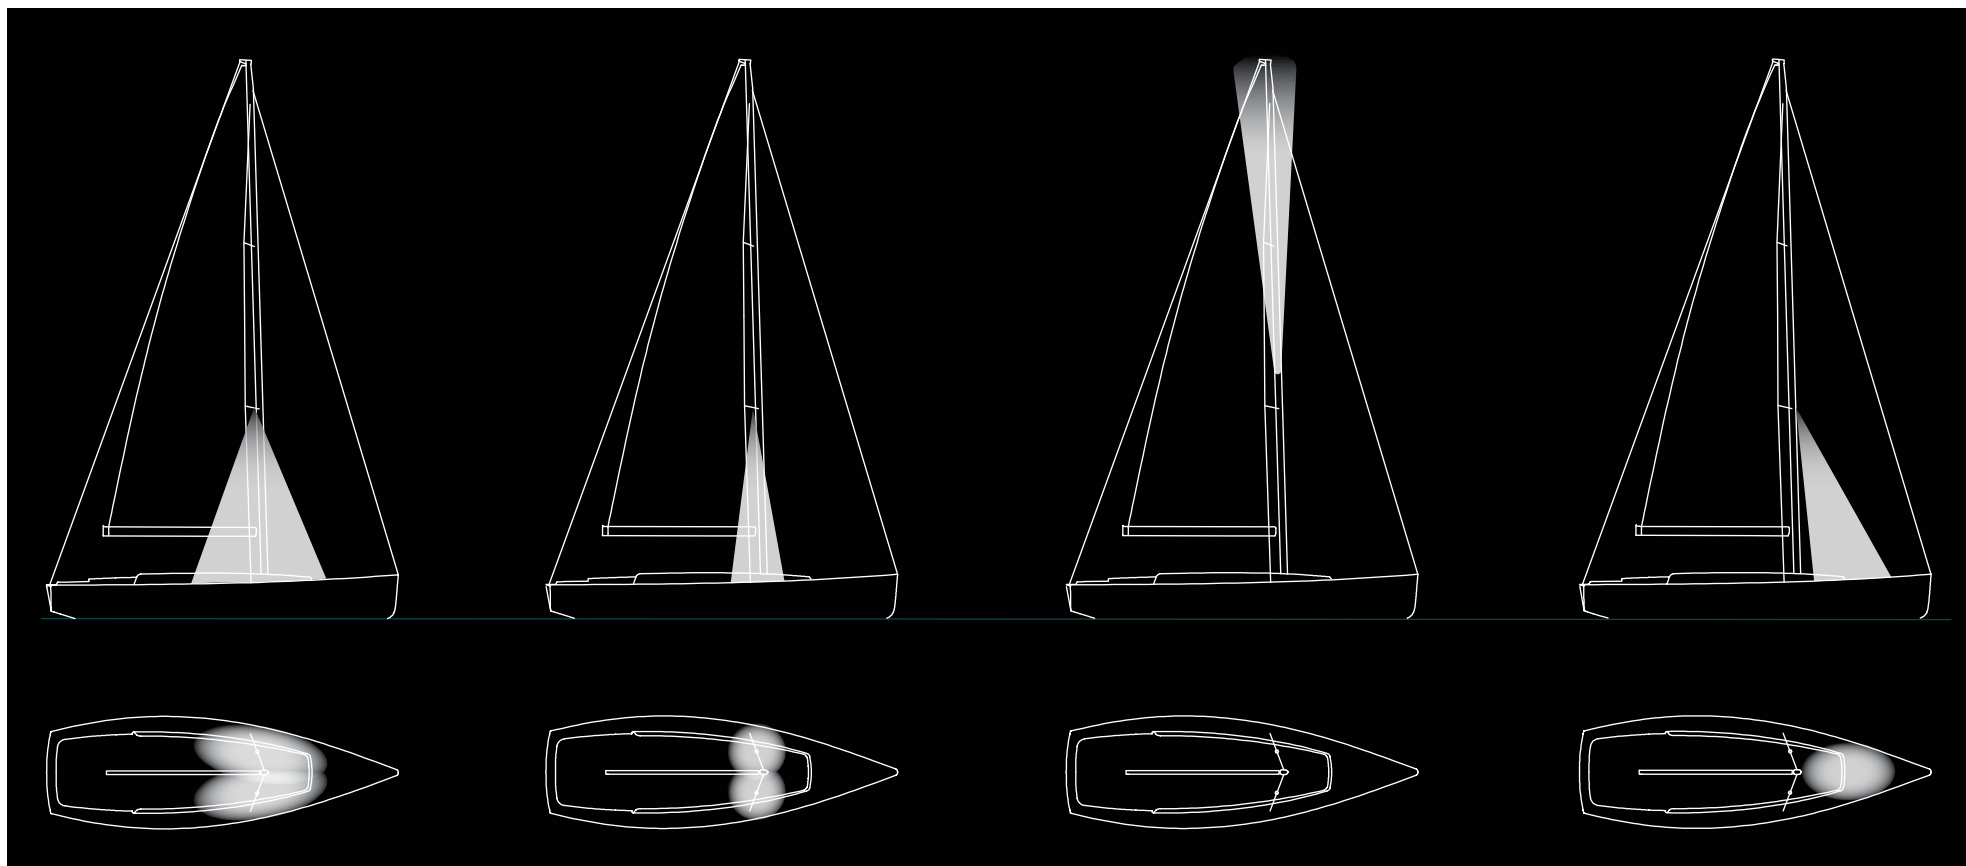

SPREADER LED 6500, 6600 SERIES
LIGHT CONE 16 X 43°
SPREADER 6m OVER DECK
LIT-UP AREA 2 X 5m

SPREADER LED 6500, 6510, 6600 SERIES
LIGHT CONE 16°
SPREADER 6m OVER DECK
LIT-UP AREA Ø 2m

SPREADER LED 6500, 6510, 6600 SERIES
LIGHT CONE 16°
UP-LIGHT

DECK LED 6800, 6900 SERIES
LIGHT CONE 16-18°
LIGHT 6m OVER DECK
LIT-UP AREA > 2 - 3m


CABIN NAVI LED COM

CABIN
DENMARK

NEW

CABIN NAVI LED - Made in Germany
Hard anodized sea water resisend aluminum,
bora silicat glass and AISI 316 stainless steel.

Now available as COM models.
Masthead or Biclor + LED decklight.



0098

Modell	Part. No	Ship m	nm	Weight g	Volt	Watt
Masthead+Deck	103.00.com	<20	3	350	12-24	3,0/3,6
Masthead+Deck	104.00.com	<50	5	370	24	5,0/3,6
Bicolor+Deck	106.08.com	<20	2	330	12-24	1,6/3,6



MASTHEAD + DECK