

PRODUCT GUIDE/overview

EXPLORE E8+E9(WELD-IN)

OceanLED



KEY FEATURES



13,000*
Fixture Lumens
* Ultra White measurement



90°
Top Beam



20°
Side Beam



0° - 50° Beam
Projection Angle

COLOUR




Dual White/Blue



Colours DMX

UNIQUE PATENTED INSTALLATION TECHNOLOGY

The Explore E9 brings to market an innovative evolution. The Unique Patented Installation Technology allows for in-water connection and removal, as well as installation in the hull areas usually inaccessible, for example tanks and void spaces such as the bulbous bow. The E9, alongside the E8 now completes the Explore range allowing for an uninterrupted halo of light.

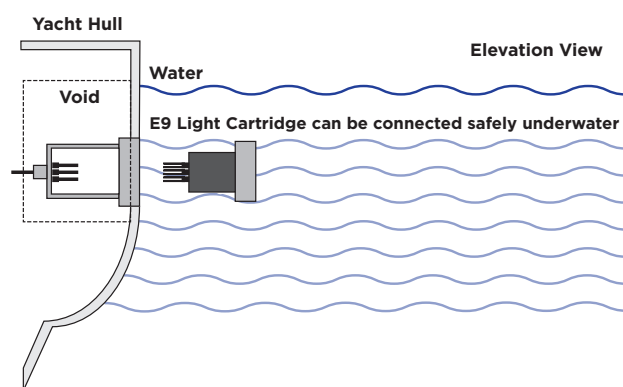


BENEFITS OF E8 & E9 ANGLED OPTICS

Create A Uniform Lighting Effect Around Your Yacht

- Choice of Angled optics to counter the hull shape.
- 0°, 10°, 20°, 30°, 40° & 50° Beam projection angles.
- 0° Cofferdam for minimal effect on laminar flow due to flush hull installation.

Without Angled Reflector Optics

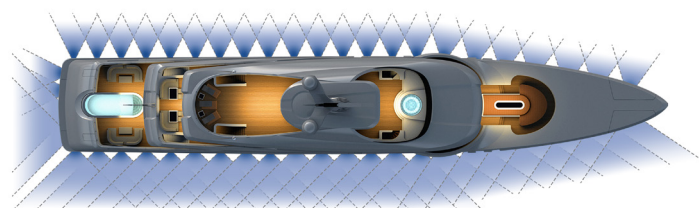



With Angled Reflector Optics

- The Explore E8 & E9 angle the beam up to 50°, while housed in a 0° cofferdam, using highly efficient reflector optics which produce the best possible uniform lighting effect; a complete halo of light around the yacht.

BENEFITS OF OCEANLED REFLECTOR OPTICS

Superior Light Distribution Due To Advanced Optics

- New generation of innovative, energy efficient reflector optics.
- Focused side beam produces a blade of light under the water that penetrates further.
- All available light is directed with minimal loss.

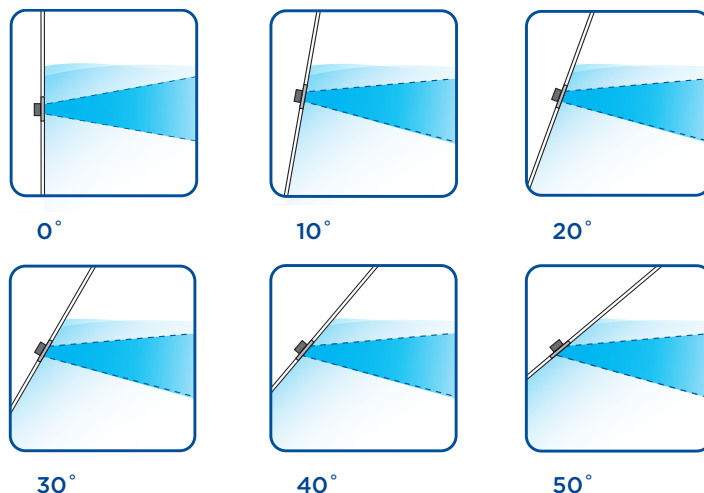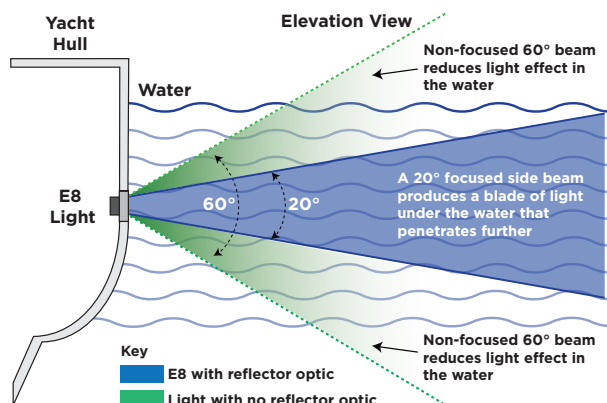


PRODUCT GUIDE/installation

EXPLORE E8/E9 WELD-IN


OceanLED

E8 EXPLODED VIEW


Rear Cofferdam available on request. Contact OceanLED's custom project management team for further details.

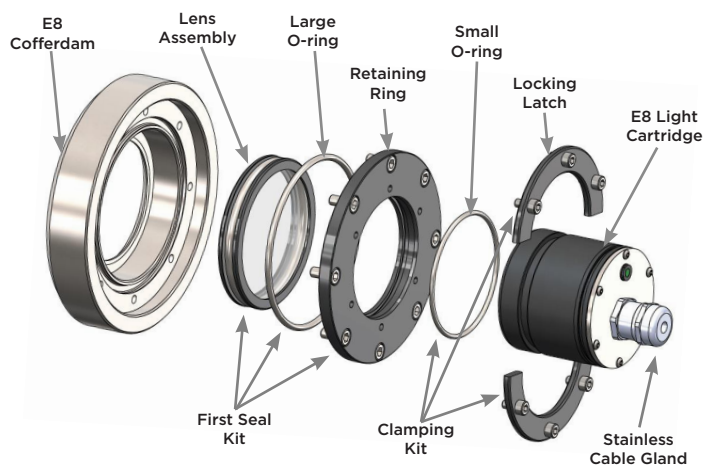

E9 EXPLODED VIEW

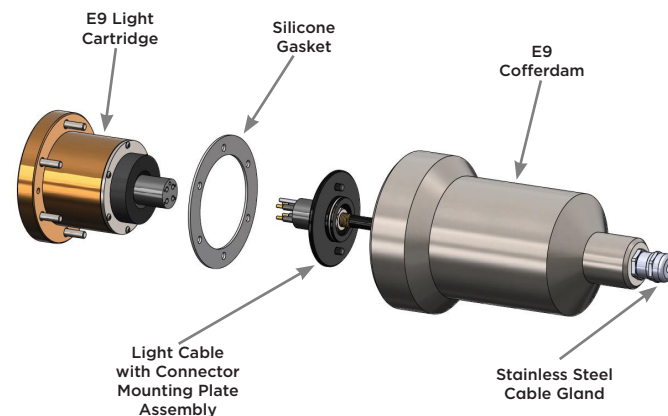

E8 / E9 SYSTEM EXAMPLE SCHEMATIC

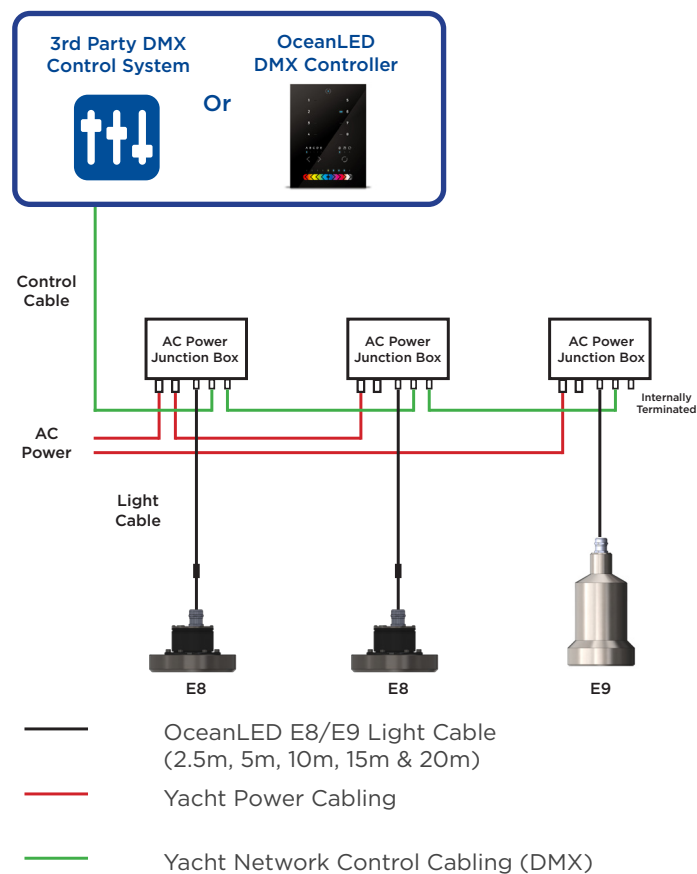

Please contact OceanLED for assistance and advice with connection and integration of your Explore E8 or E9 underwater lighting system.

CHOOSE YOUR LIGHT SETUP

EXPLORE E8 for areas accessible from inside the vessel
EXPLORE E9 for in-accessible areas such as tanks or voids

LIGHT: Choose between Dual Colour Midnight Blue / Ultra White or Colours DMX

COFFERDAM: Choose between Aluminium or Stainless Steel

BEAM ANGLE: Choose internal beam angling

POWER: AC or DC

CONTROL: Choose the method of how you control your lights

CABLE: Choose your required cable lengths

OPTION 1 - E8
OPTION 2 - E9

OPTION 1 - DUAL
OPTION 2 - COLOURS

OPTION 1 - ALUMINIUM
OPTION 2 - STAINLESS STEEL

OPTION 1 - 0° **OPTION 2 - 10°** **OPTION 3 - 20°**
OPTION 4 - 30° **OPTION 5 - 40°** **OPTION 6 - 50°**

OPTION 1 - AC POWER JUNCTION BOX
OPTION 2 - DC JUNCTION BOX


OPTION 1 - 3rd PARTY
OPTION 2 - OCEANLED CONTROLLER

OPTION 1 - 2.5M **OPTION 2 - 5M** **OPTION 3 - 10M**
OPTION 4 - 15M **OPTION 5 - 20M**


PROJECT MANAGEMENT TO COMMISSIONING

- Our experienced custom project management team will work with you from initial concept through to system commissioning.
- We will work closely with your team to understand and overcome the challenges presented throughout the build process.
- Delivering a tailored underwater lighting system; achieving the clients desired lighting effect.
- OceanLED will work with you to deliver in-line with your build schedule; keeping you informed of progress throughout.
- Should you require it, OceanLED offers a commissioning service for complete peace of mind.

DIMENSIONS - E8 WITH COFFERDAM

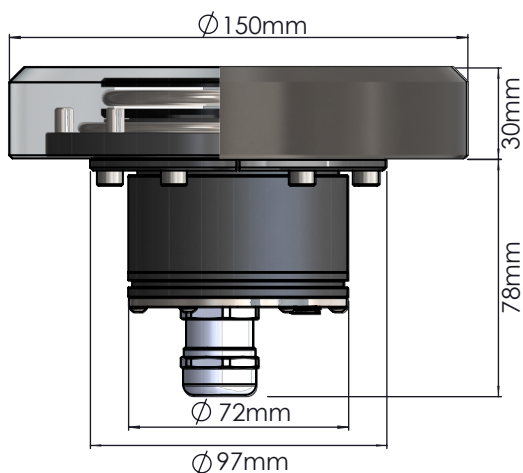


DIMENSIONS - E9 COFFERDAM

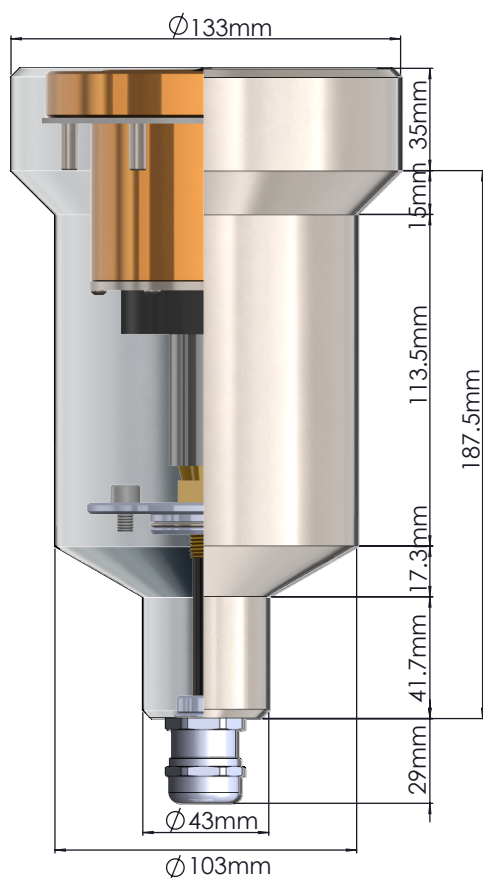

AC POWER JUNCTION BOX


Height, Width, Depth Minimum Clearance Zone	150mm x 233mm x 93mm 250mm x 253mm
Material / Colour	Steel / RAL 7035
Weight	2.4kg
IP Rating	IP65
Maximum Ambient Temperature	50°C

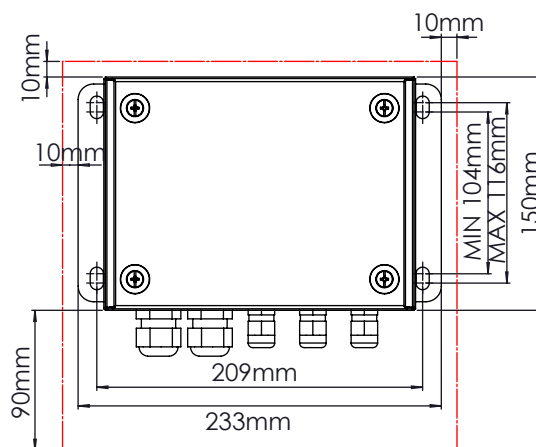

MINIMUM CLEARANCE ZONE

DC JUNCTION BOX

Height, Width, Depth Minimum Clearance Zone	94mm x 94mm x 58mm 194mm x 274mm
Material / Colour	Polymer / RAL 7035
Weight	0.3kg
IP Rating	IP65
Maximum Ambient Temperature	50°C

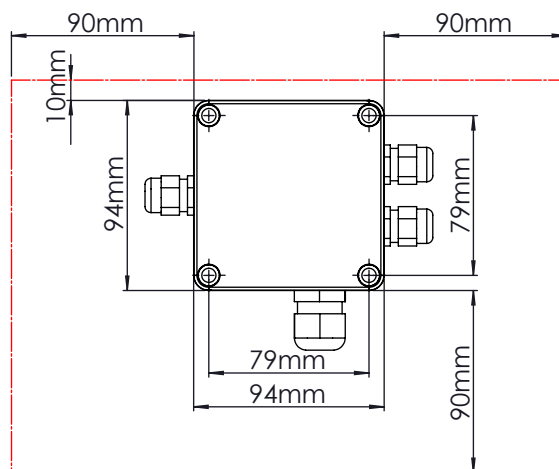

MINIMUM CLEARANCE ZONE

For welding procedures, please contact your relevant classification surveyor or society.

PRODUCT GUIDE/technical

EXPLORE E8/E9 WELD-IN



TECHNICAL	
Fixture Lumens (Total light output from a finished fixture)	Dual – 13,000* Colours – 6,000*
Optics	Linear Micro-Faceted Reflector
No Of LEDs	Dual - 18 W, 17 B Colours - 25 R, 19 G, 20 B, 20 W
Beam Angle	90° x 20°
Angled Optics Options	0°, 10°, 20°, 30°, 40° & 50°
Min-Max Operating Voltage DC	20V – 32V DC
Min-Max Operating Voltage AC	100-240V 50/60Hz
Power	Dual – 113W Colours – 82W
Current / Amp Draw (DC)	Dual - 4.7A @ 24V DC Colours - 3.2A @ 24V DC
Current / Amp Draw (AC)	110V AC 1.25A 230V AC 0.65A
Driver Type	Internal
Connectivity Options	DC Junction Box AC Power Junction Box
Correlated Colour Temp.	6500K White
IP Rating	IP68 from front and rear of the cofferdam
Approx. Light Penetration	Avg. Water Quality - 13.5m Perfect Water Quality - 32m+
Minimum Light Cable Bend Radius	75mm

*Ultra White measurement

APPROVALS & WARRANTY EXPLORE E8	
Lloyds	
RINA	
ABS	
DNV-GL	Pending
Warranty	3 Years

PHYSICAL E8	
Total Diameter of Cofferdam	150mm
Diameter of Light Cartridge	72mm
Overall Length	163mm / 108mm with / w/o Rear Cofferdam
Total Weight (Stainless Steel Cofferdam)	3.2 kg (7.05lbs)
Total Weight (Aluminium Cofferdam)	1.75 kg (3.86lbs)
Total Weight - inc Rear Cofferdam (Stainless Steel Cofferdam)	8.6 kg (18.96lbs)
Total Weight - inc Rear Cofferdam (Aluminium Cofferdam)	3.55 kg (7.83lbs)
Rear Cable Stub Length	0.3m
Cofferdam Material	Aluminium / Stainless Steel 3.2 Certified
Light Body Material	Aluminium

PHYSICAL E9	
Total Diameter of Cofferdam	133mm
Diameter of Light Cartridge	110mm
Overall Length	252mm
Total Weight - With Cofferdam (Stainless Steel)	8.4 kg (18.52lbs)
Total Weight - With Cofferdam (Aluminium)	4.2 kg (9.96lbs)
Cable	Max 20m to junction box
Cofferdam Material	Aluminium / Stainless Steel 3.2 Certified
Light Body Material	Aluminium Bronze

APPROVALS & WARRANTY EXPLORE E9	
Lloyds	
RINA	
ABS	
DNV-GL	Pending
Warranty	3 Years
Patented	