

HORNET

LIGHTWEIGHT AND POWERFUL



GET TO WORK

- o Single-click hose connection, thanks to the **fast connector**.
- o **Interchangeable burners**, with no tools needed.
- o Readily available flame thanks to **synchronised piezo ignition**, with a single press on the trigger.
- o Easy **self-maintenance**: changing the trigger / piezo-ignition also requires no tools.

POWER AND PRECISION

Offering a high level of performance with its targeted flame, the **HORNET gun** has a range of burners from 30 to 160 kW.

USER COMFORT

- o **Very lightweight** (about 500 g), to reduce the risk of musculoskeletal disorders (MSDs).
- o **Attenuated sound level** (< 81 dBA).
- o Ready-to-use gun, operational in less than a minute, comes in a carrying case.
- o Control power through the level of pressure exerted on the trigger.
- o Spare trigger / piezo-ignition included in the pack.

ENVIRONMENTAL APPROACH

The safety-handle that equips the HORNET gun contributes to a significant reduction in gas consumption and therefore:

- o reduces CO2 emissions,
- o **avoids the risk of causing accidental fires** on worksites and related harm to people and property.



AFTER-SALES SERVICE

- o Guaranteed for 2 years.
- o Response in less than 24 hours.

SAFETY

- o **Safe ignition with low gas flow.**
- o Three-position marking: changing burner, storage, ignition.
- o **Safety handle** (the gun switches off when the operator releases the handle).
- o Professional quality rubber hose to ISO 3821 standard.
- o Gun supplied with gloves specially designed to provide optimum heat resistance.

CE
1312

EXPRESS
depuis 1905

Shrink wrapping




LOGISTIC/CRATING



WINTER STORAGE



CONTAINMENT / SCAFFOLDING

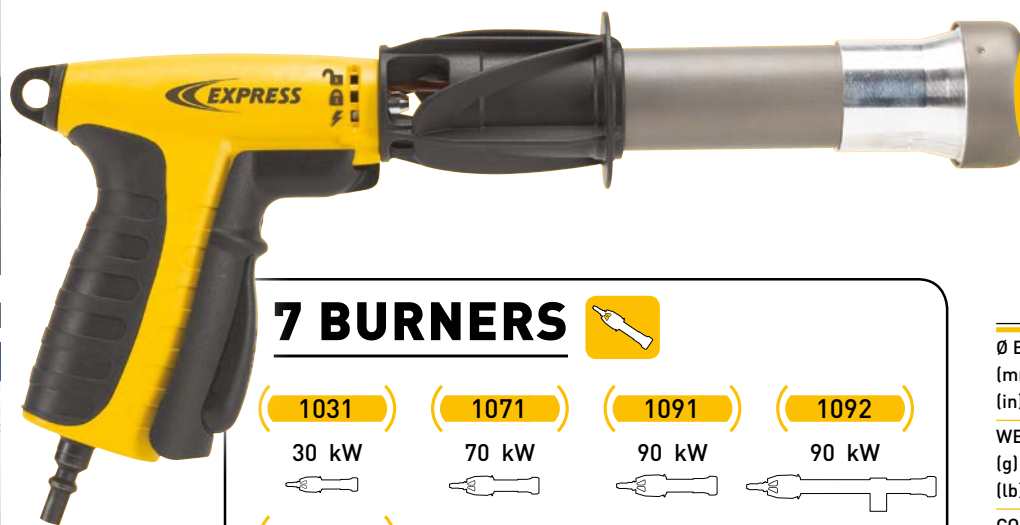

GUARANTEE
2 years

Parts and
labour

7 BURNERS



1031

30 kW



1071

70 kW




1091

90 kW




1092

90 kW



1151

160 kW



1161


160 kW



1912

90 kW

Length :
1,25 m - 49.2 in



5 PACKS



10701

70 kW

10731

30 kW
+ 70 kW

10901



90 kW

10931


30 kW
+ 90 kW

11601

90 kW



80-320 µm
PE - BD



	1031	1071	1091	1092	1151	1161	1912
Ø BURNER (mm)	35	41	50	50	50	50	30
(in)	1.3	1.6	1.9	1.9	1.9	1.9	1.1
WEIGHT (g)	160	178	210	325	325	383	260
(lb)	0.3	0.3	0.4	0.7	0.7	0.8	0.5
CONSUMPTION (kg/h)	2,58	5,22	6,77	6,77	11,8	11,8	6,77
(lb/h)	5.6	11.5	14.9	14.9	26	26	14.9
POWER (kW / 4 bar)	30	70	90	90	160	160	90
(BTU at 58 psi)	102 400	238 800	308 000	308 000	546 000	546 000	308 000
FLAME L (mm)	250	350	350	350	1 100	1 100	300
(in)	9.8	13.7	13.7	13.7	43.3	43.3	11.8
FLAME Ø (mm)	45	55	65	65	65	65	140-160
(in)	1.7	2.1	2.5	2.5	2.5	2.5	5.5-6.2
SOUND LEVEL (dBA)	77	79	81	81	81	81	85

Distributor stamp